


WELL INSTALLATION RECORD

JOB NAME Mecca Flow Equalization Basin JOB NUMBER WF0MECCA.0DDR
 WELL# MFEB7-GW2 BORING# MFEBBH23 INSTALLATION DATE 10/26/2015
 LOCATION (FL State Plane, East Zone, NAD83) N26°50'28.6" E80°14'37.4" TOP OF CASING (TOC) ELEVATION 22.49 feet NAVD88
 RISER/SCREEN MATERIAL 2-inch diameter PVC GROUNDWATER DEPTH 5.38 feet below top of casing (btoc)
 SCREEN SLOT SIZE 0.010 inch GROUNDWATER ELEVATION 17.11 feet NAVD88
 DRILLING METHOD Mud Rotary FILTER MATERIAL 20/30 Sand
 BOREHOLE DIAMETER 4.00 inches DRILLING CONTRACTOR Nutting Engineers
 SUBSURFACE MATERIAL AT FILTER ZONE Limestone, indurated, vuggy, gray (40 feet to 42 feet); sand with some limestone fragments very fine, brown (42 feet to 45 feet)
 NOTES Drilling fluid: bentonite; groundwater depth is obtained from constant head permeability test; development duration: pumped until free of visible sediments

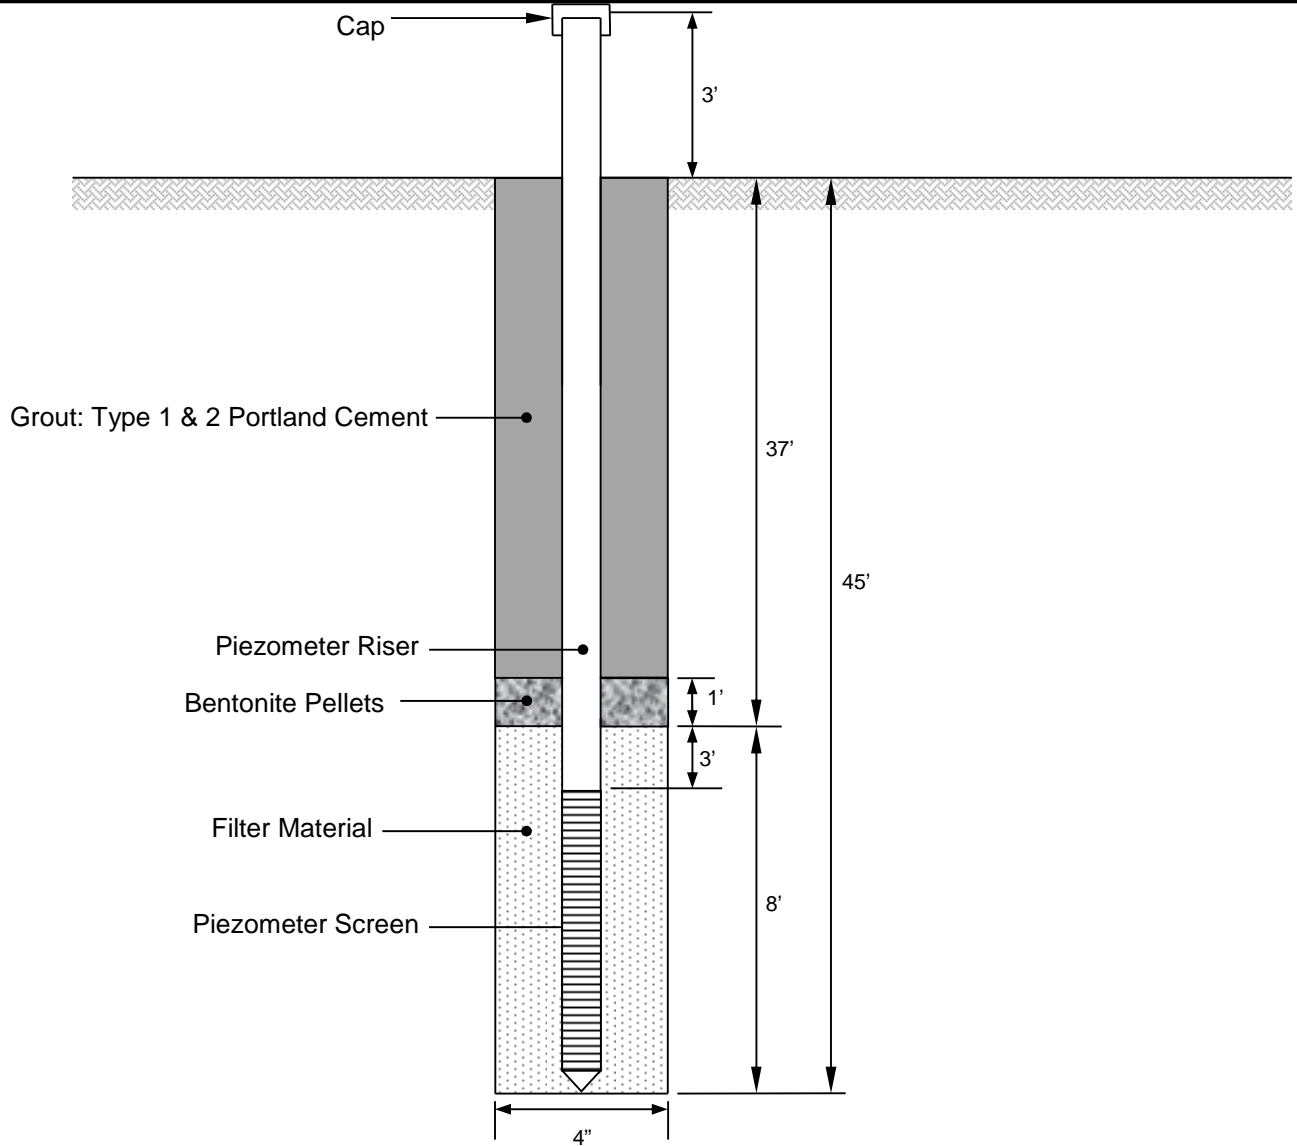

"NOT TO SCALE"