


WELL INSTALLATION RECORD

JOB NAME Mecca Flow Equalization Basin JOB NUMBER WF0MECCA.0DDR
 WELL# MFEB8-GW2 BORING# MFEBBH24 INSTALLATION DATE 10/2/2015
 LOCATION (FL State Plane, East Zone, NAD83) N26°48'42.6" E80°16'55.0" TOP OF CASING (TOC) ELEVATION 23.69 feet NAVD88
 RISER/SCREEN MATERIAL 2-inch diameter PVC GROUNDWATER DEPTH 7.29 feet below top of casing (btoc)
 SCREEN SLOT SIZE 0.010 inch GROUNDWATER ELEVATION 16.40 feet NAVD88
 DRILLING METHOD Mud Rotary FILTER MATERIAL 20/30 Sand
 BOREHOLE DIAMETER 4.00 inches DRILLING CONTRACTOR Nutting Engineers
 SUBSURFACE MATERIAL AT FILTER ZONE Sand with silt and abundant coarse shell fragments

NOTES Drilling fluid: bentonite; fluid loss during drilling: 20 gallons; groundwater depth is obtained from constant head permeability test; development duration: pumped until free of visible sediments

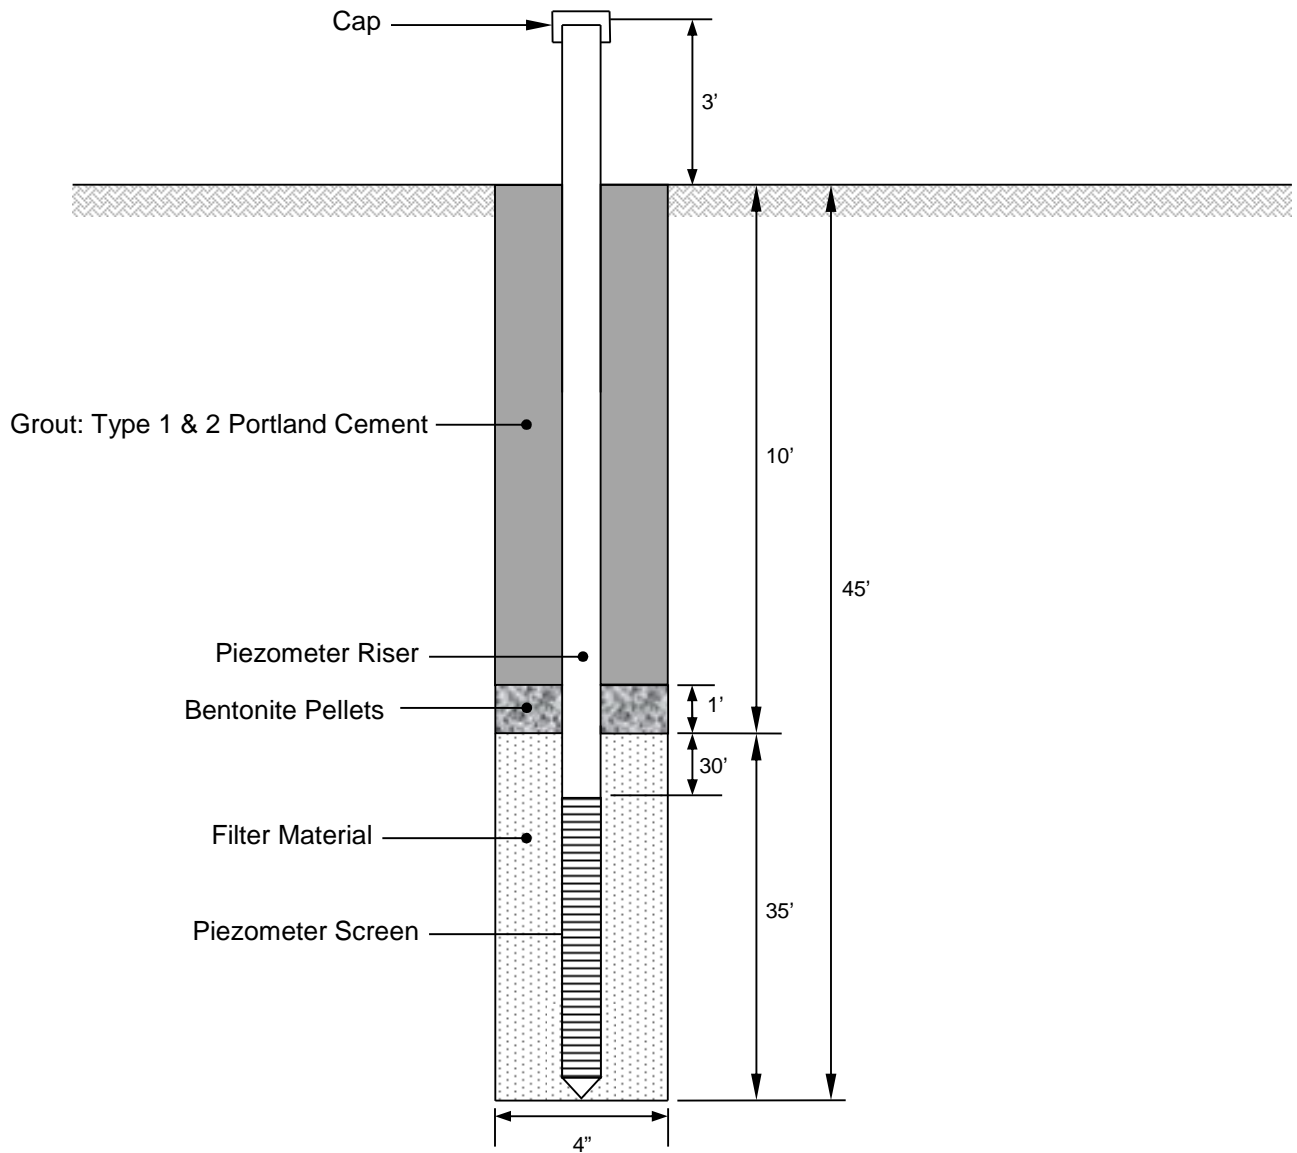

“NOT TO SCALE”