



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station ID 099000087
 Date 03/25/98 Well No. G-200 TW
 Latitude 26 28 06 Longitude 80 48 39
 SE 1/4 SE 1/4 SE 1/4 SW 1/4 Section 35 Township 46S Range 35E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +11.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA °C Field Density NA ° a/c
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. (X) Air () CT () Auger () Other WIRE LINE CORE
 T. Depth-Driller 221' T. Depth-Logger 221'
 Casing Depth Driller 81' Casing Depth Logger 81'
 Bit Size 3 1/2" Casing Dia. I.D. 3"
 Hole Dia. 3" From 0' To 221' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use MONITOR


TYPE OF SURVEYS RUN

Lateral E' () Density ()
 Caliper (X) ccl ()
 Flow meter () Fluid Sampler ()
 16", 64" normals (X) Temperature ()
 Neutron () Delta Temp. ()
 Natural Gamma () SP (X)
 Fluid Resistivity () Single Pt. (X)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING
 CALIPER WAS A LITTLE STICKY.

G-200 TW 03/25/98

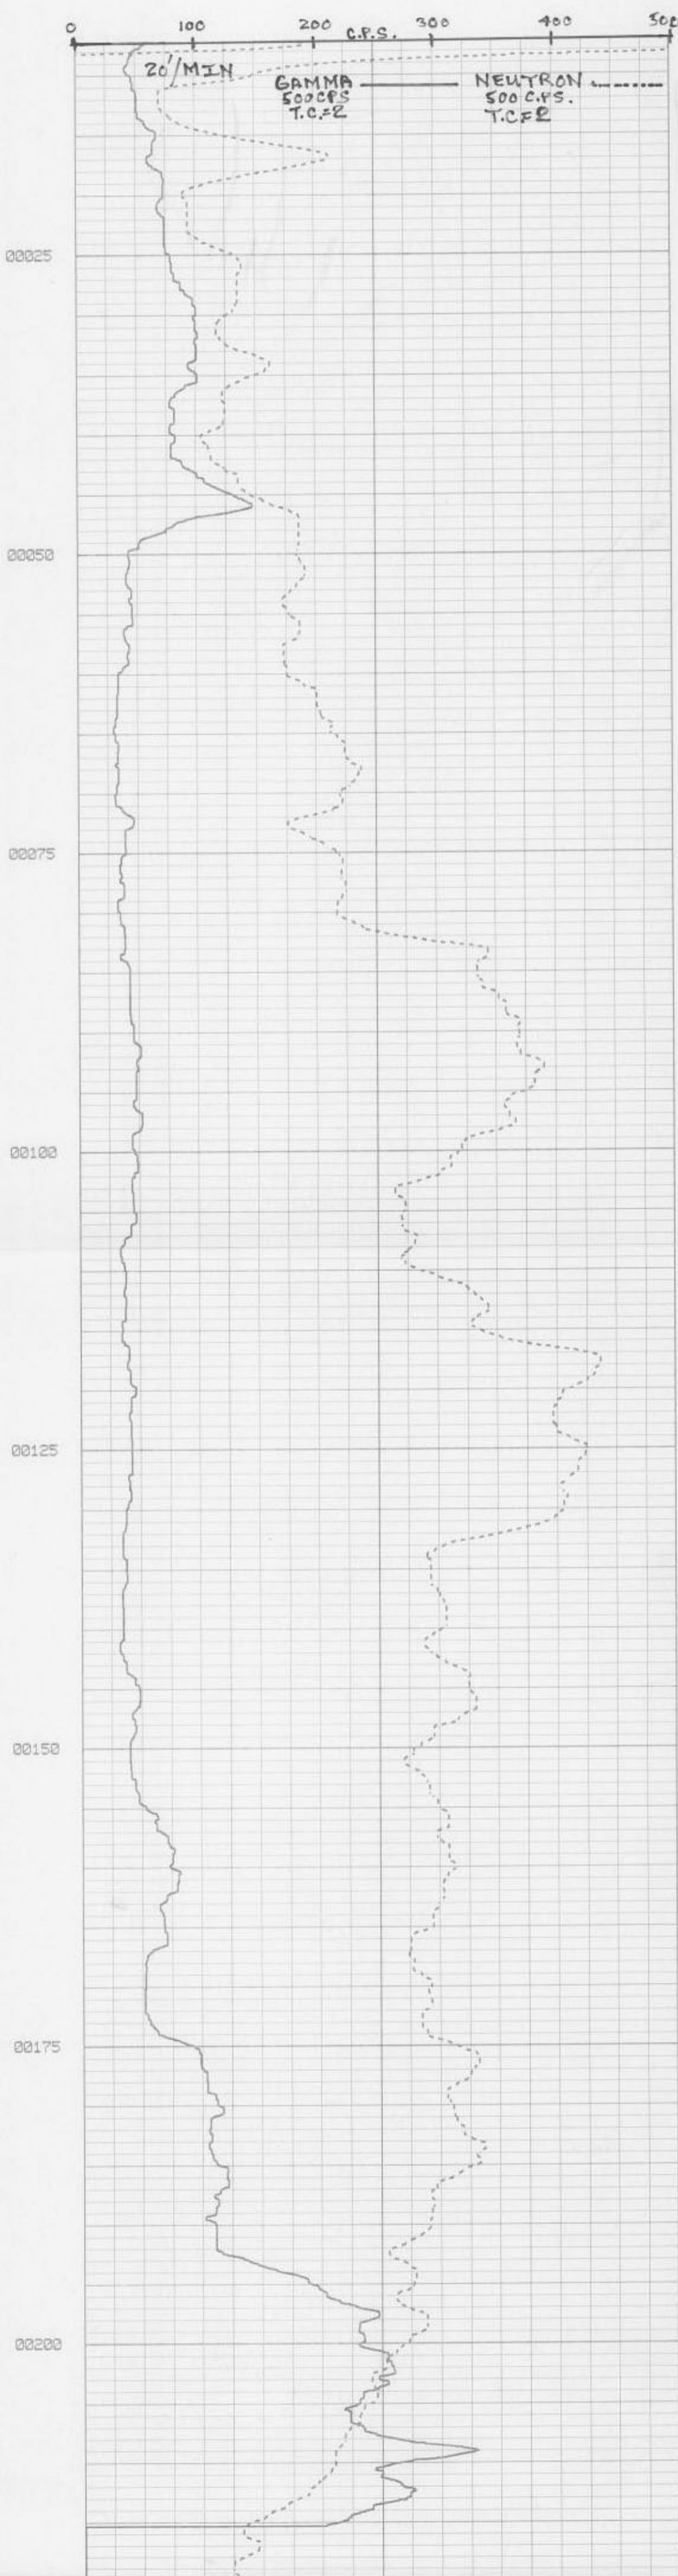



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County PALM BEACH
 Station I.D. 0990000067
 Date 03/25/98 Well No. G-200 TW
 Latitude 26 26 06 Longitude 80 48 39
SE 1/4 SE 1/4 SE 1/4 SW 1/4 Section 35 Township 46S Range 35E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +11.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 221' T. Depth-Logger 221'
 Casing Depth Driller 81' Casing Depth Logger 81'
 Bit Size 3 1/2" Casing Dia. I.D. 3"
 Hole Dia. 3" From 0' To 221' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use MONITOR

TYPE OF SURVEYS RUN

Lateral Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING
 CALIPER WAS A LITTLE STICKY.

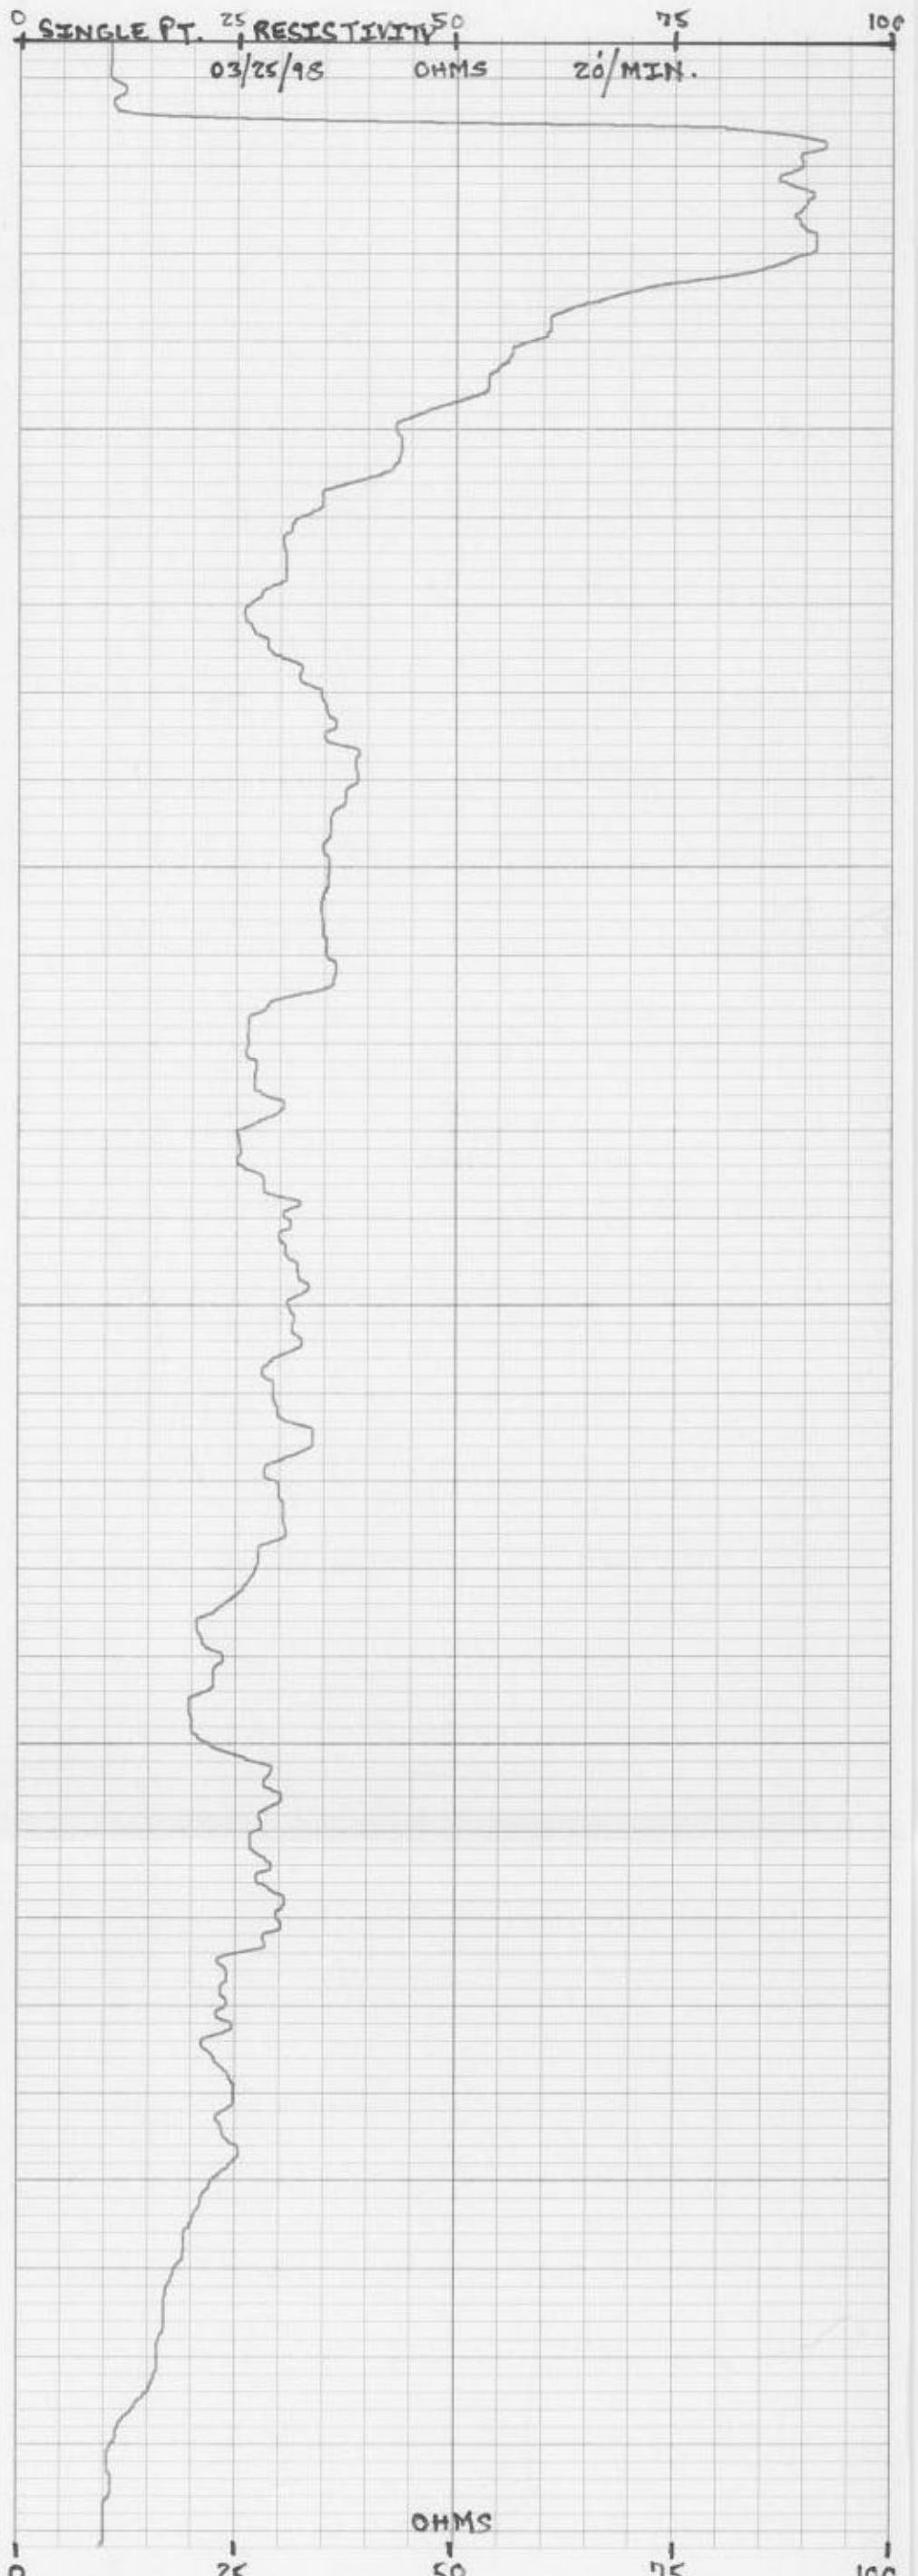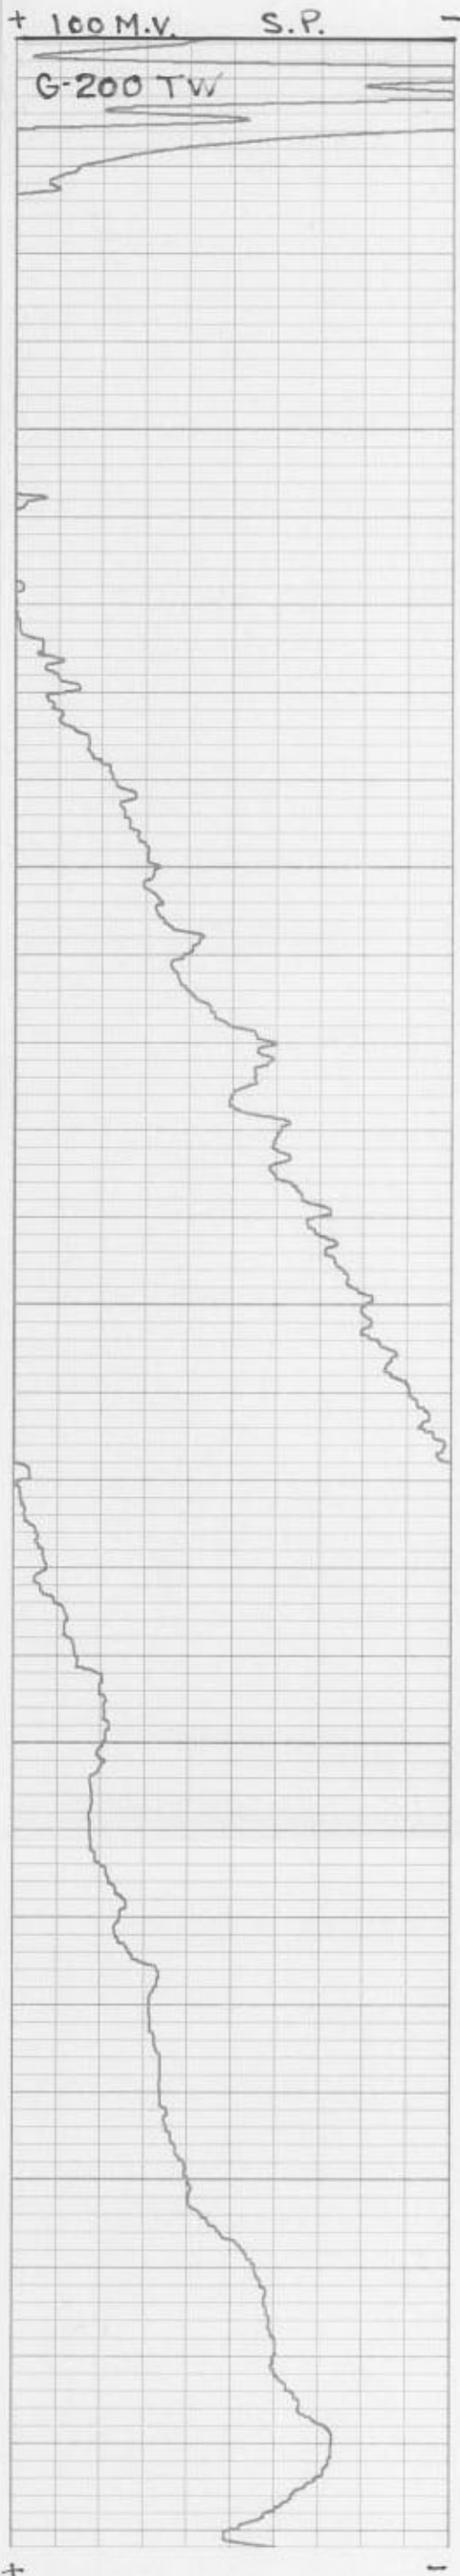



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station I.D. 099000067
 Date 03/25/98 Well No. G-200 TW
 Latitude 26 26 06 Longitude 80 48 39
 SE 1/4 SE 1/4 SE 1/4 SW 1/4 Section 35 Township 46S Range 35E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +11.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rod (X) Air () CT () Auger () Other WIRE LINE CORE
 T. Depth-Driller 221' T. Depth-Logger 221'
 Casing Depth Driller 81' Casing Depth Logger 81'
 Bit Size 3 1/2" Casing Dia. I.D. 3"
 Hole Dia. 3" From 0' To 221' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use MONITOR

TYPE OF SURVEYS RUN

Lateral 6' () Density ()
 Caliper () ccl ()
 Flow meter () Fluid Sampler ()
 16", 64" normals (X) Temperature ()
 Neutron (X) Delta Temp. ()
 Natural Gamma (X) SP (X)
 Fluid Resistivity () Single Pt. (X)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING
CALIPER WAS A LITTLE STICKY.

G-200 TW

2" 4" 6"
 HOLE DIA.
 20' MIN. CALIPER

03/25/98

00075


00100

00125

00150

00175

00200

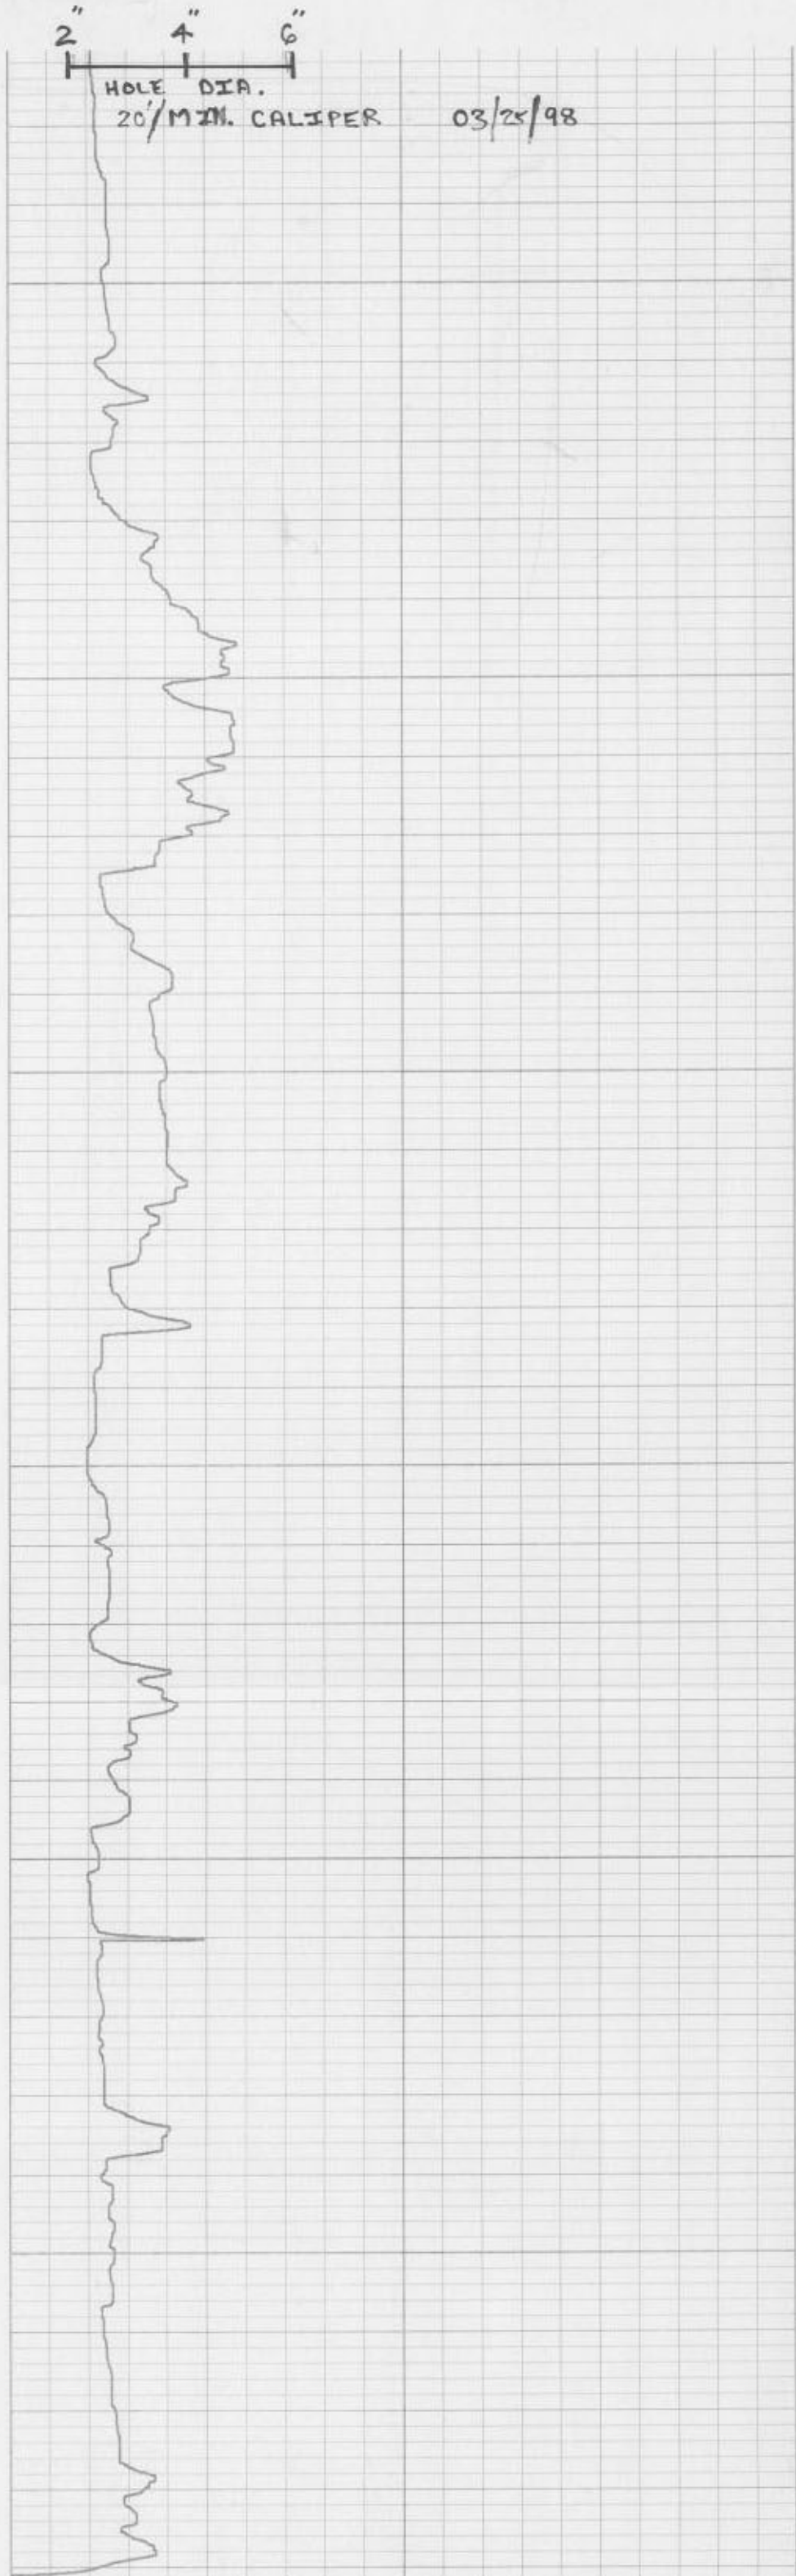



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station I.D. 0920000067
 Date 03/25/98 Well No. G-200 TW
 Latitude 26 26 06 Longitude 80 48 39
SE 1/4 SE 1/4 SE 1/4 SW 1/4 Section 35 Township 46S Range 35E
 Owner U.S.C.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +11.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION


Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 221' T. Depth-Logger 221'
 Casing Depth Driller 81' Casing Depth Logger 81'
 Bit Size 3 1/2" Casing Dia. I.D. 3"
 Hole Dia. 3" From 0' To 221' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use MONITOR

TYPE OF SURVEYS RUN

Lateral 6" () Density ()
 Caliper (x) cd ()
 Flow meter () Fluid Sampler ()
 16", 64" normals (x) Temperature ()
 Neutron (x) Delta Temp. ()
 Natural Gamma (x) SP (x)
 Fluid Resistivity () Single Pt. (x)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING
 CALIPER WAS A LITTLE STICKY.

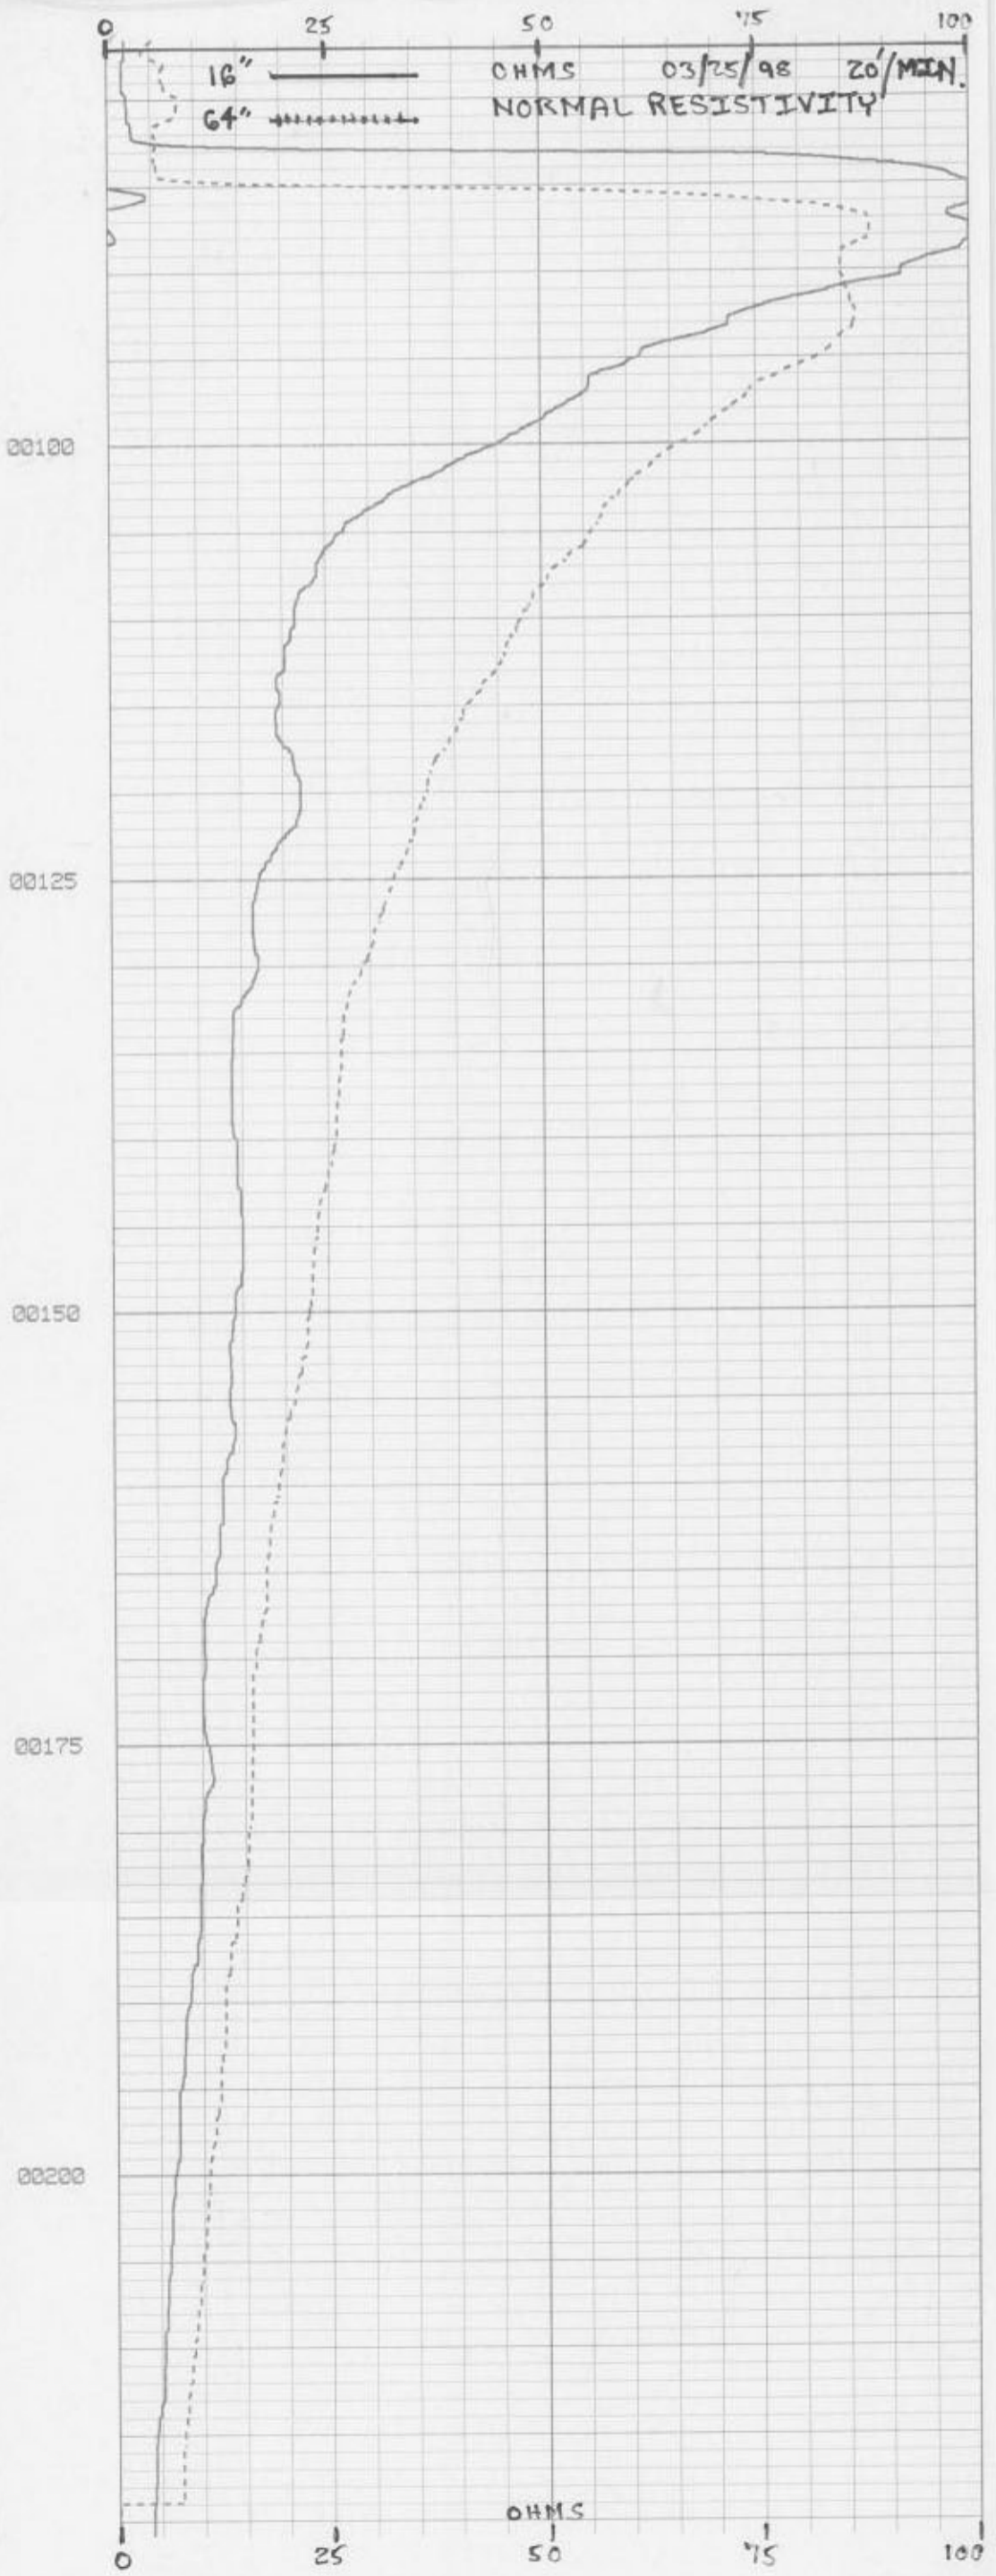

0 CPS 500


Format: Azimuthal Density 3Track Vertical Scale: 10" per 100 feet Creation Date: Mon, Jul 22, 2002, 06:23:22 AM

Format: Azimuthal Density 3Track Vertical Scale: 10" per 100 feet Creation Date: Mon, Jul 22, 2002, 06:30:32 AM

PB-1703
Well G-200 TW
Lat: 262606
Long 804839
SIR = 35/46/35
TD

(NEUT)
0 CPS 500



(GR)
0 CPS 500


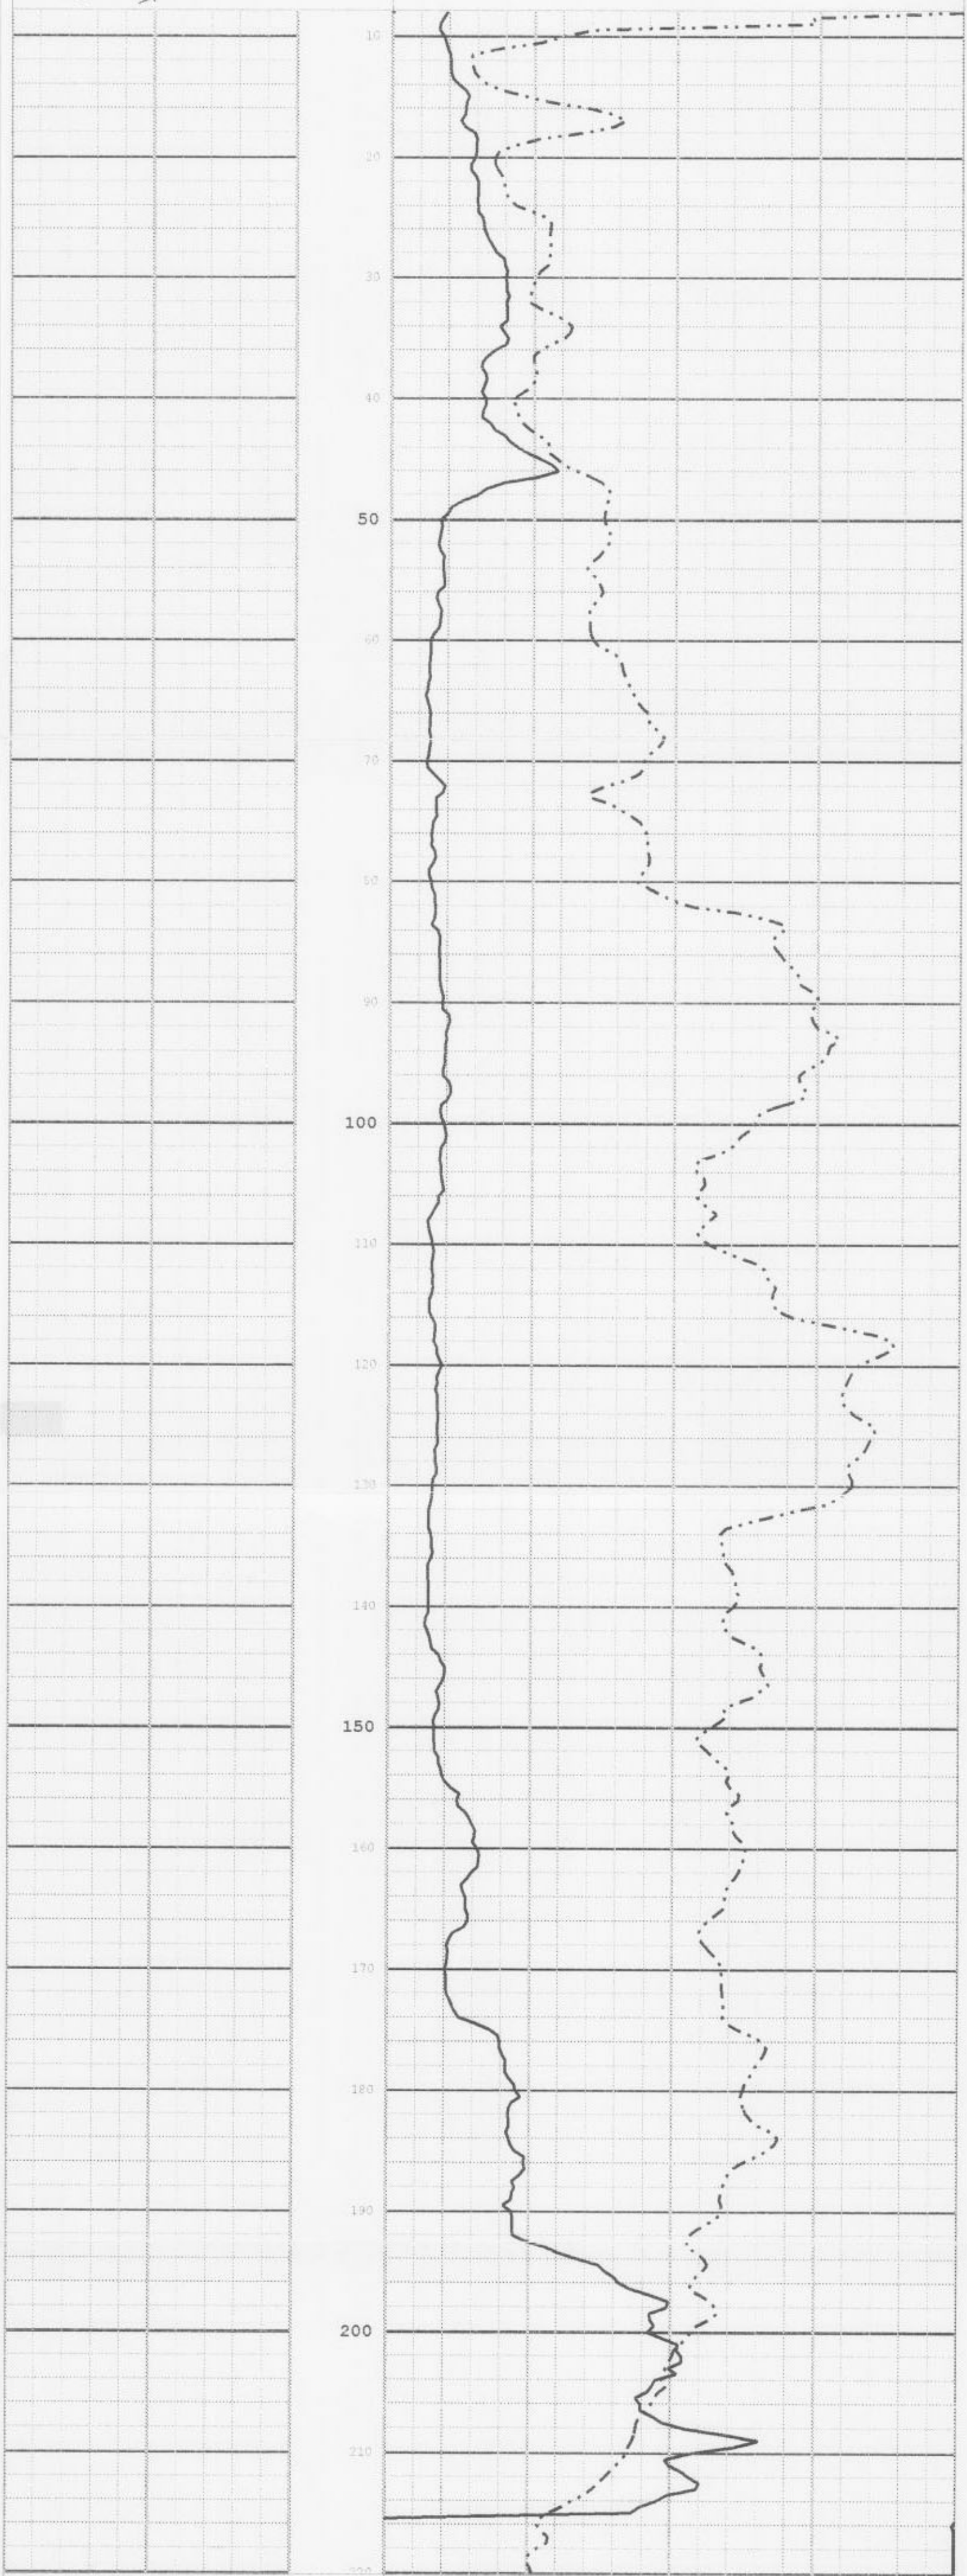


(GR)
0 CPS 500

(NEUT)
0 CPS 500

Format: Azimuthal Density 3Track Vertical Scale: 10" per 100 feet Creation Date: Mon, Jul 22, 2002, 06:30:34 AM

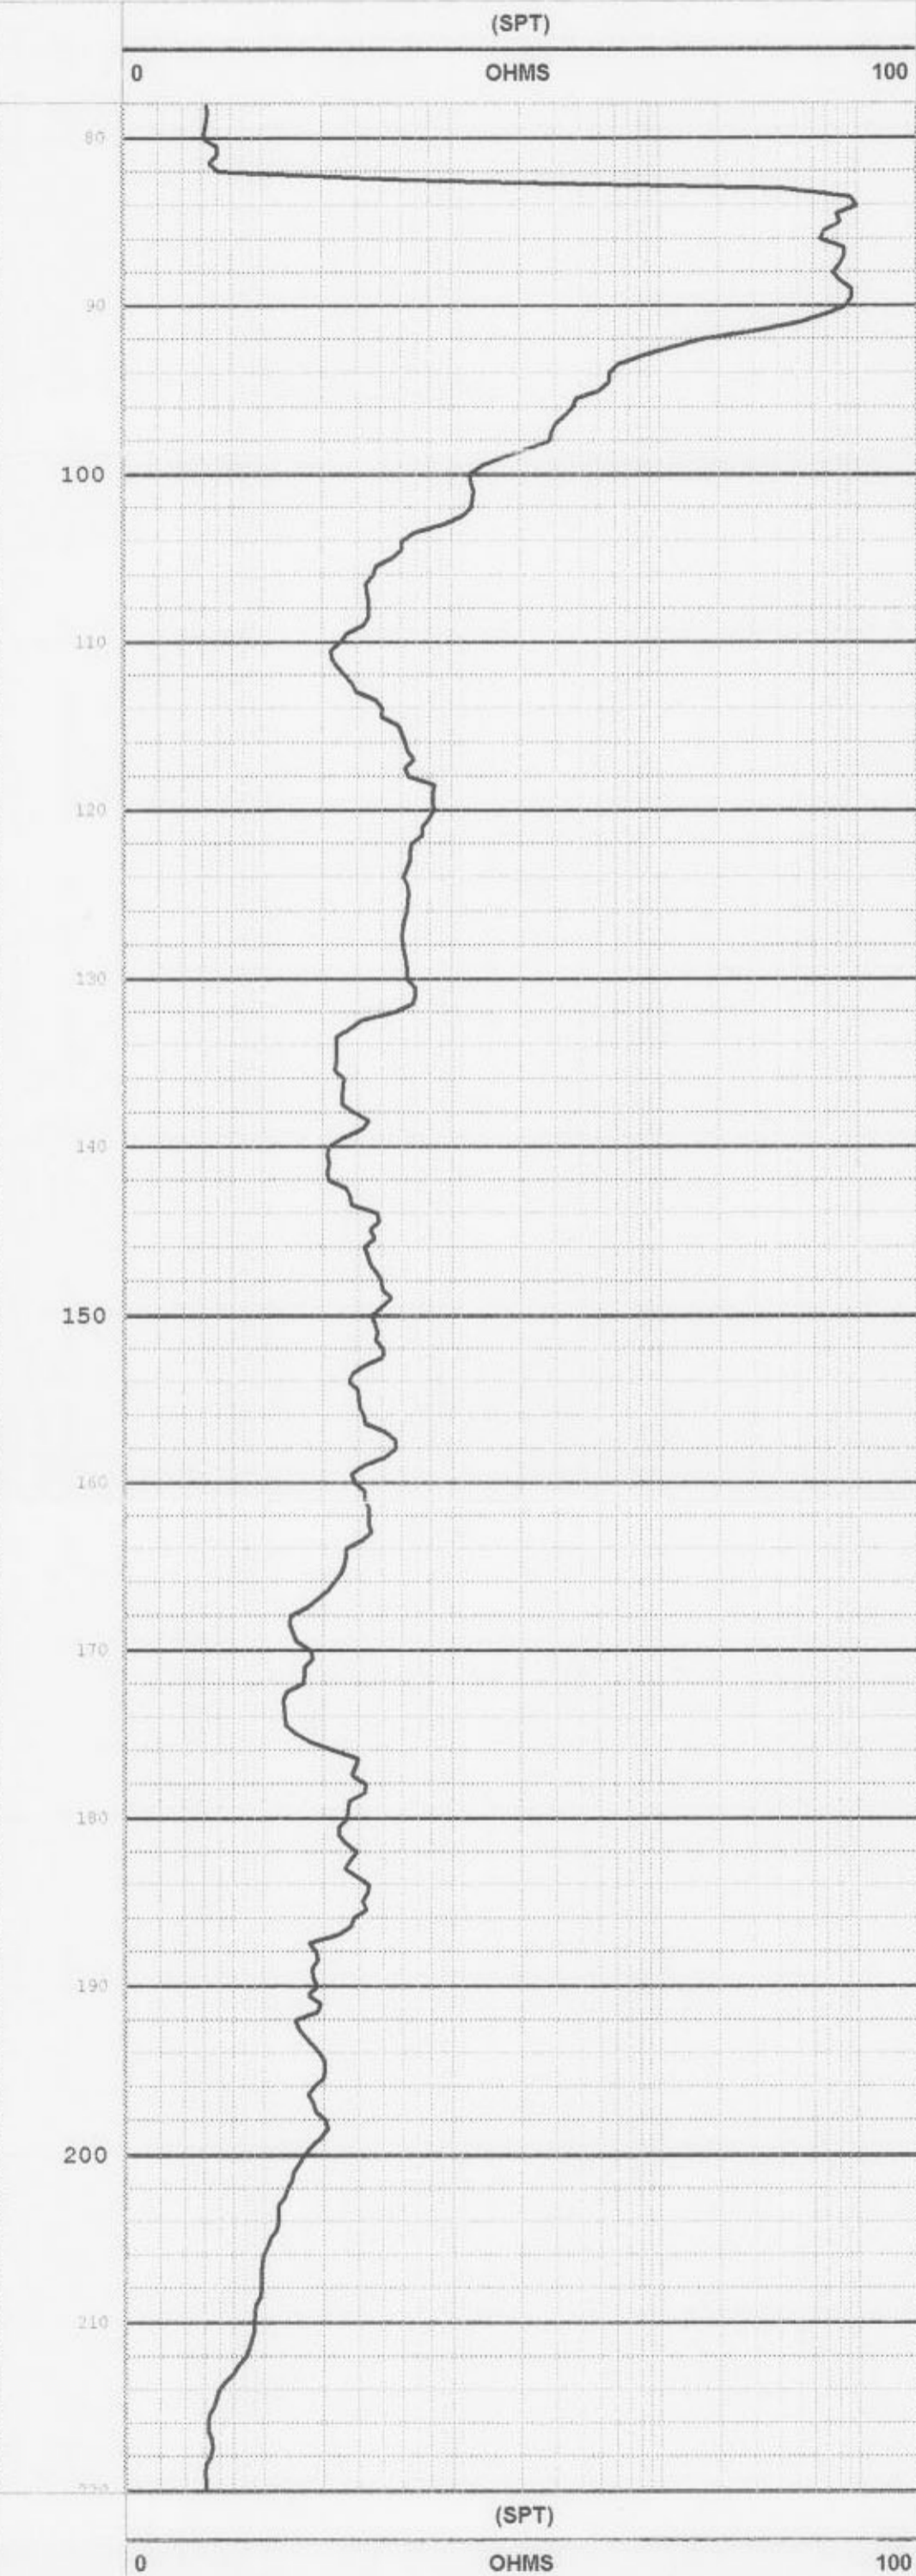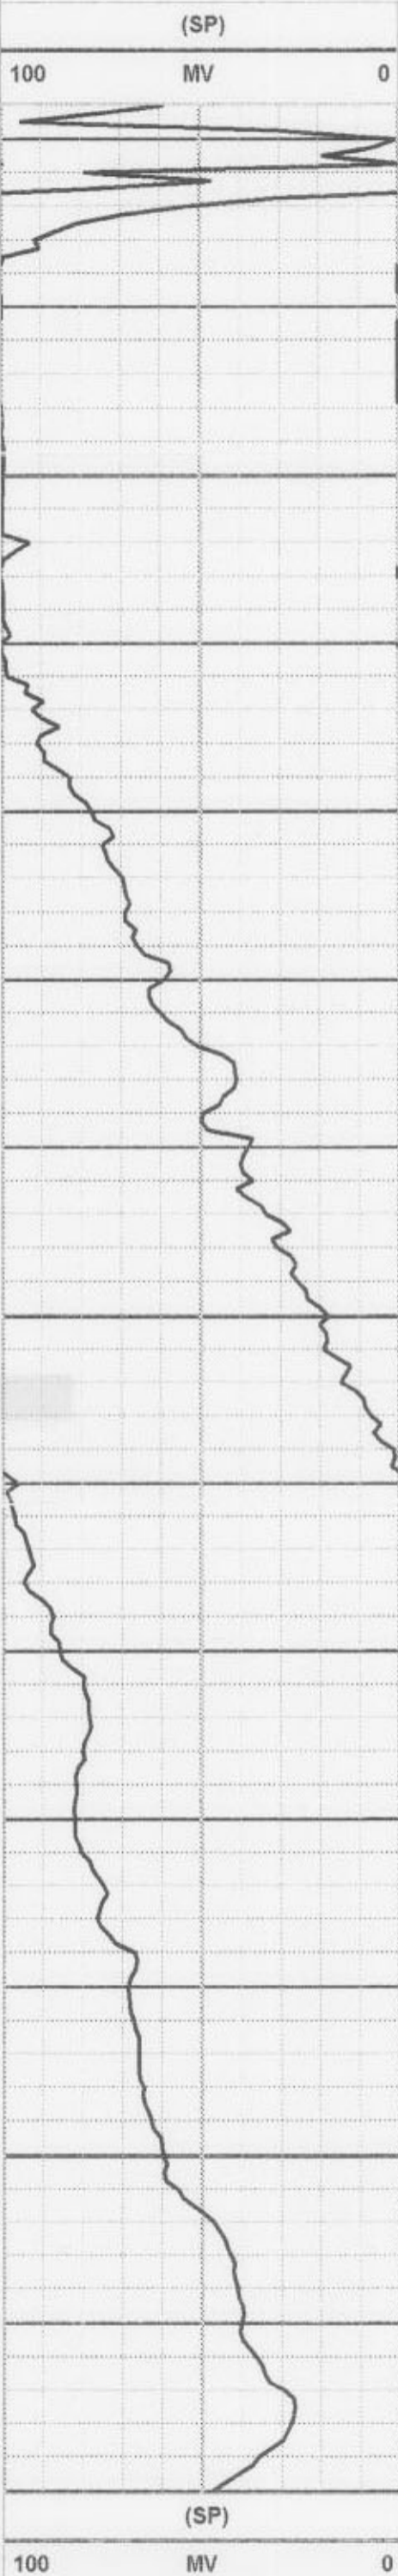

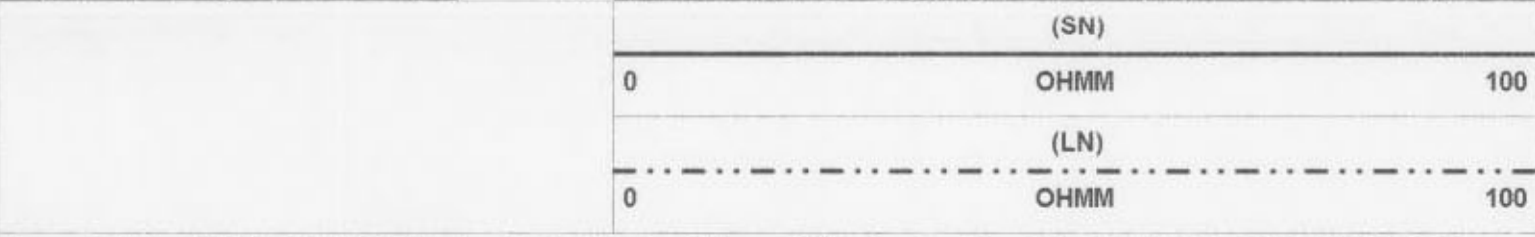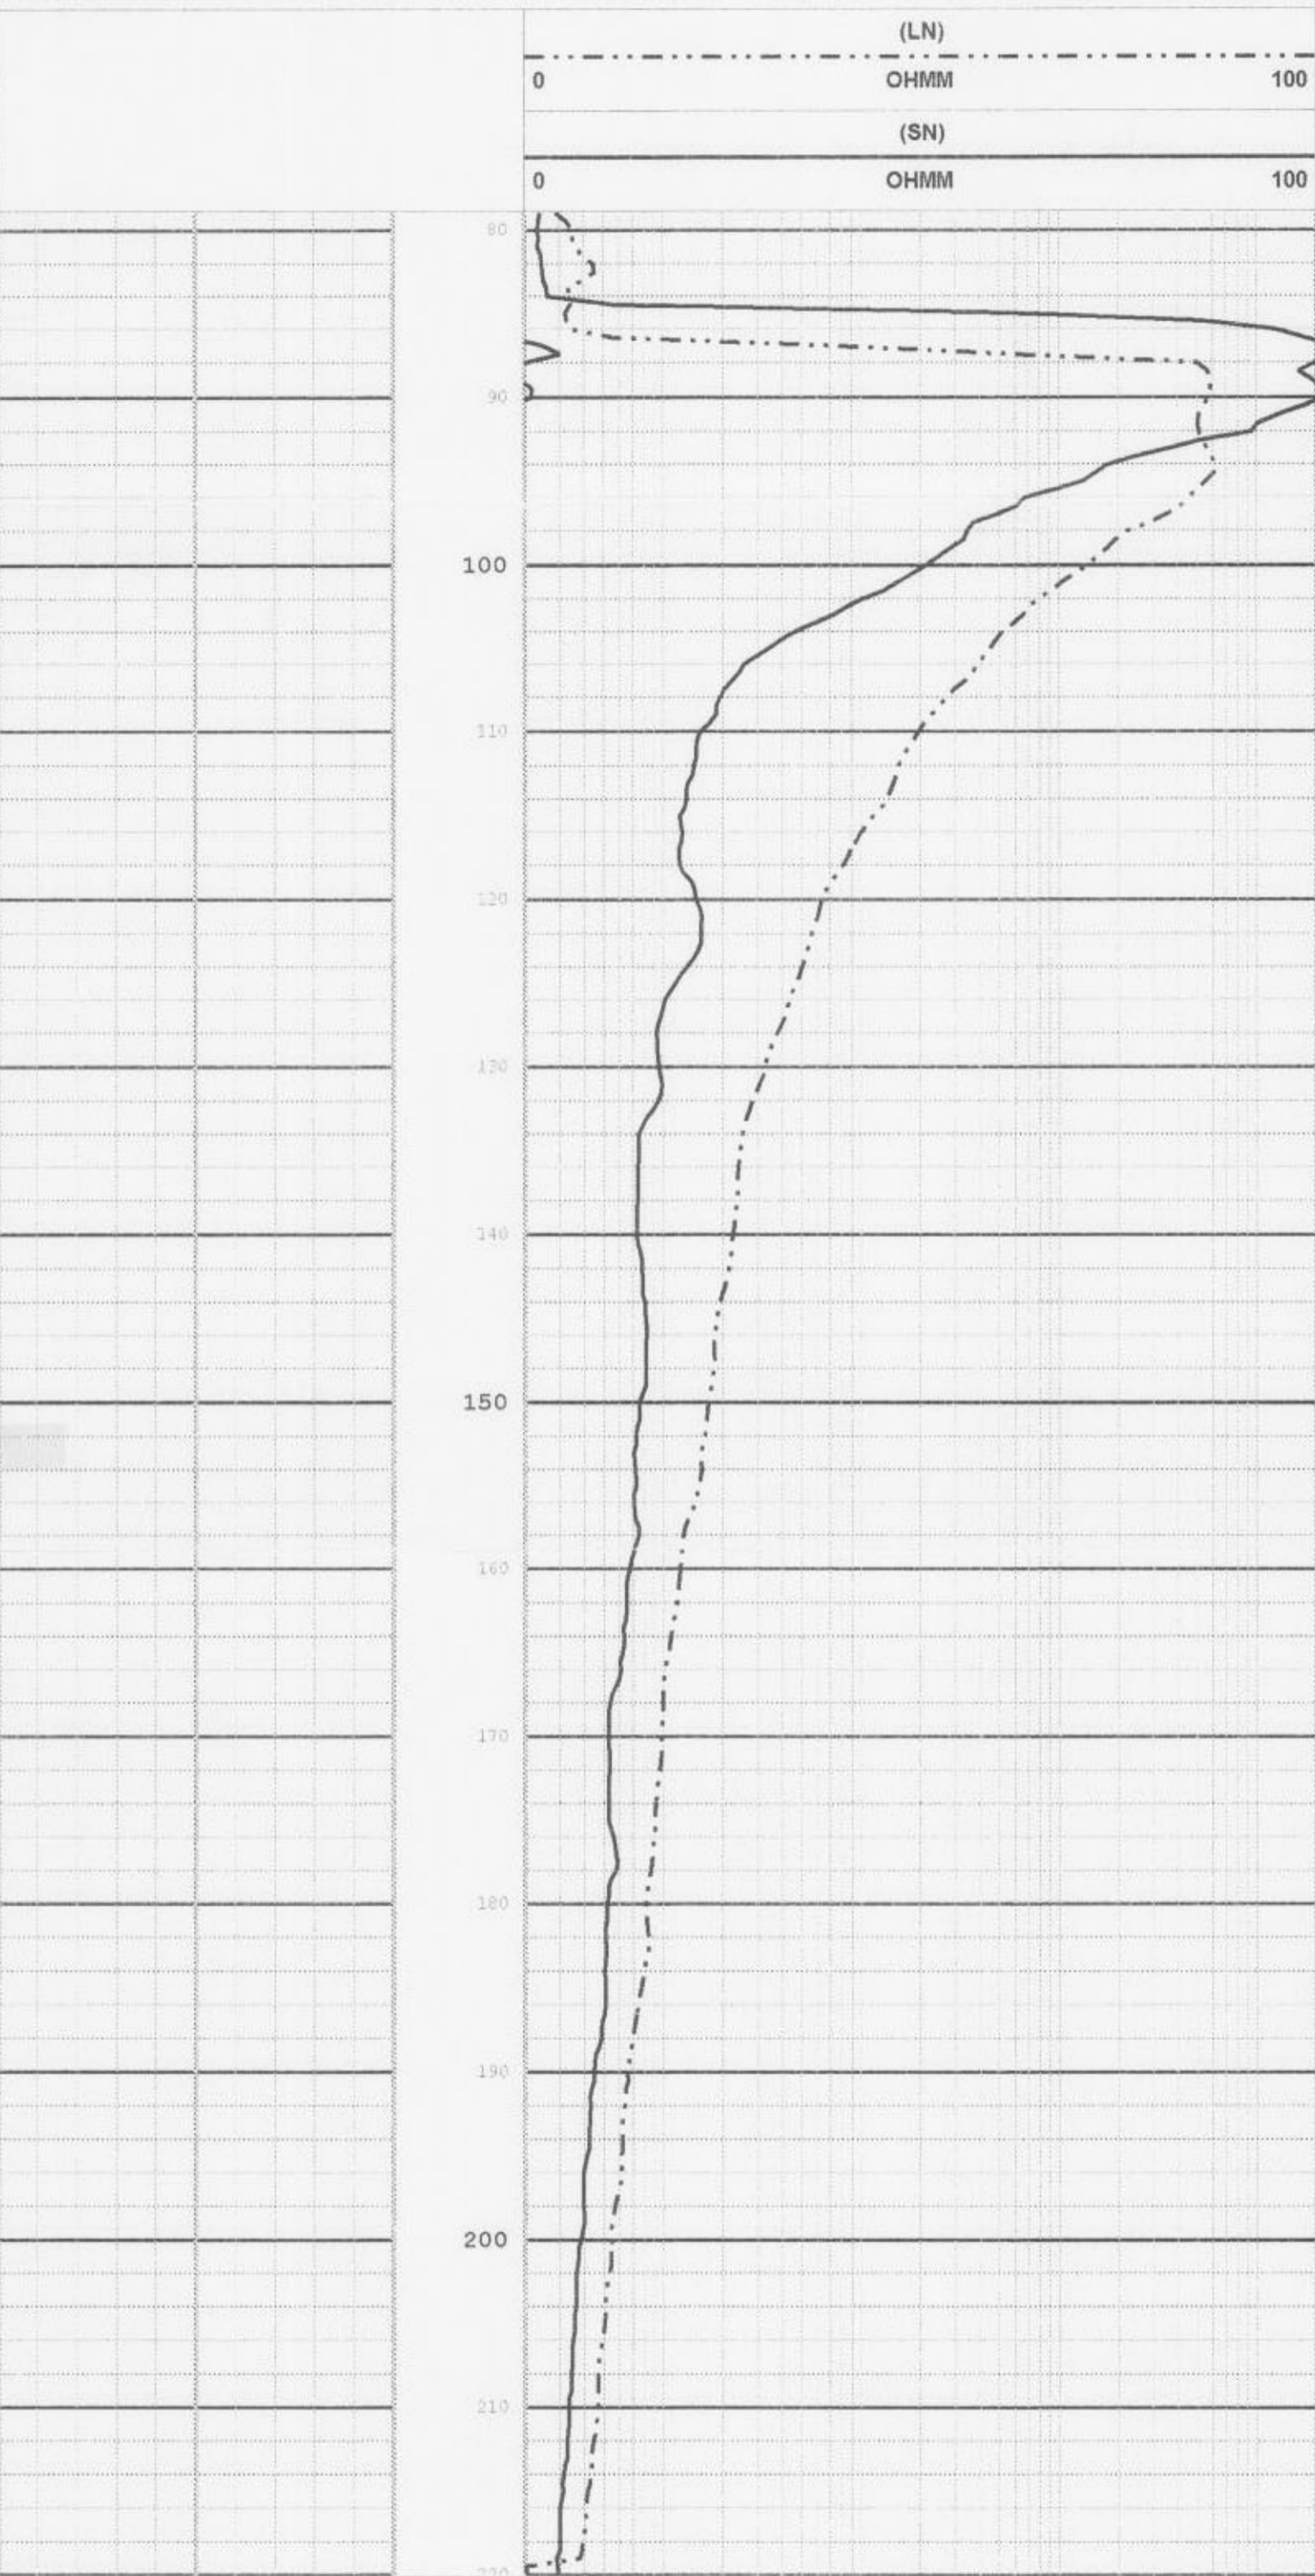

(CALI)
2 IN 6

