


Well Completion Construction Detail HES 22D and HES 22S

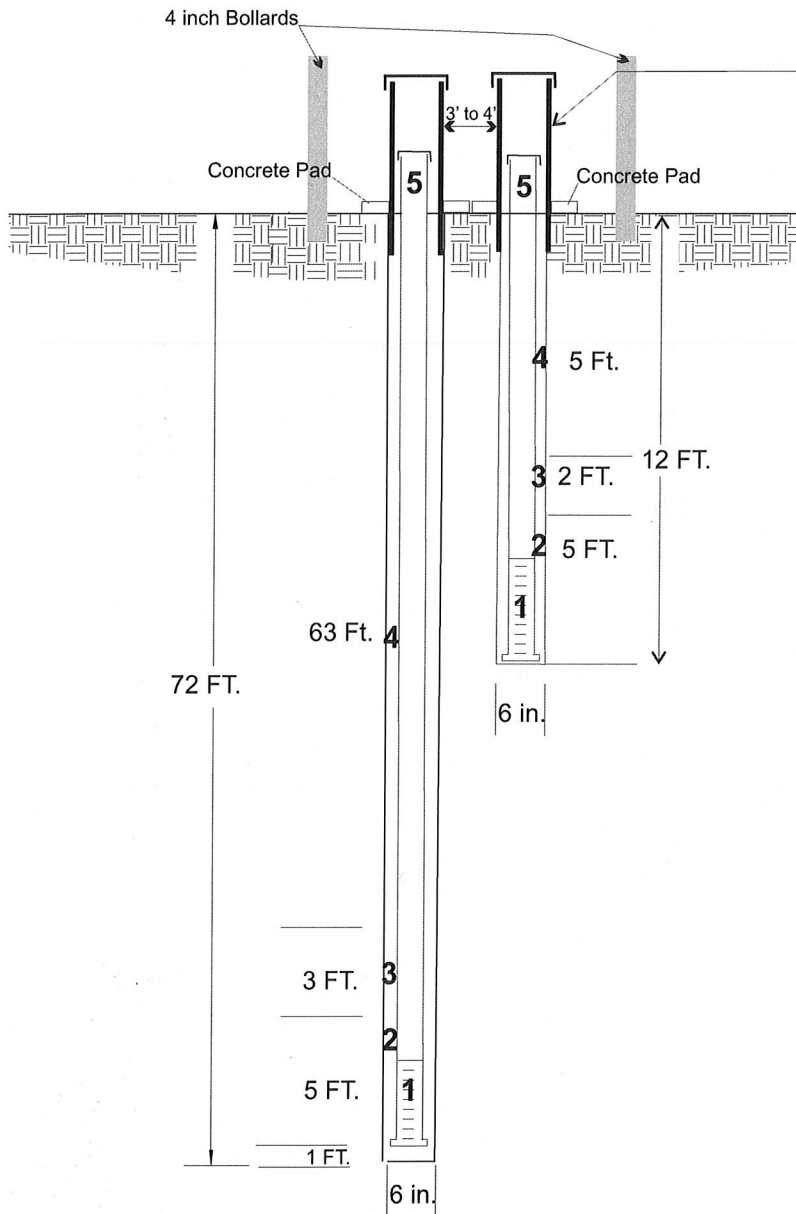

Well Casing in 6" Protective PVC
Casing w/ Cover - Well Casing
~2.3 feet over top of concrete pad.

5 = WELL CASING TYPE AND SIZE

2" dia Schedule 40 PVC

4 = BACKFILL

Neat Cement Grout

3 = SEAL TYPE

Bentonite Chips

2 = FILTER TYPE

20 - 30 Quartz fine sand

1 = WELL SCREEN TYPE

2 feet of 2" dia Schedule 40 PVC w/ 0.02 slot

NOT TO SCALE

URS

MONITOR WELL CONSTRUCTION DIAGRAM