


Well Completion Construction Detail HES 29D and HES 29S

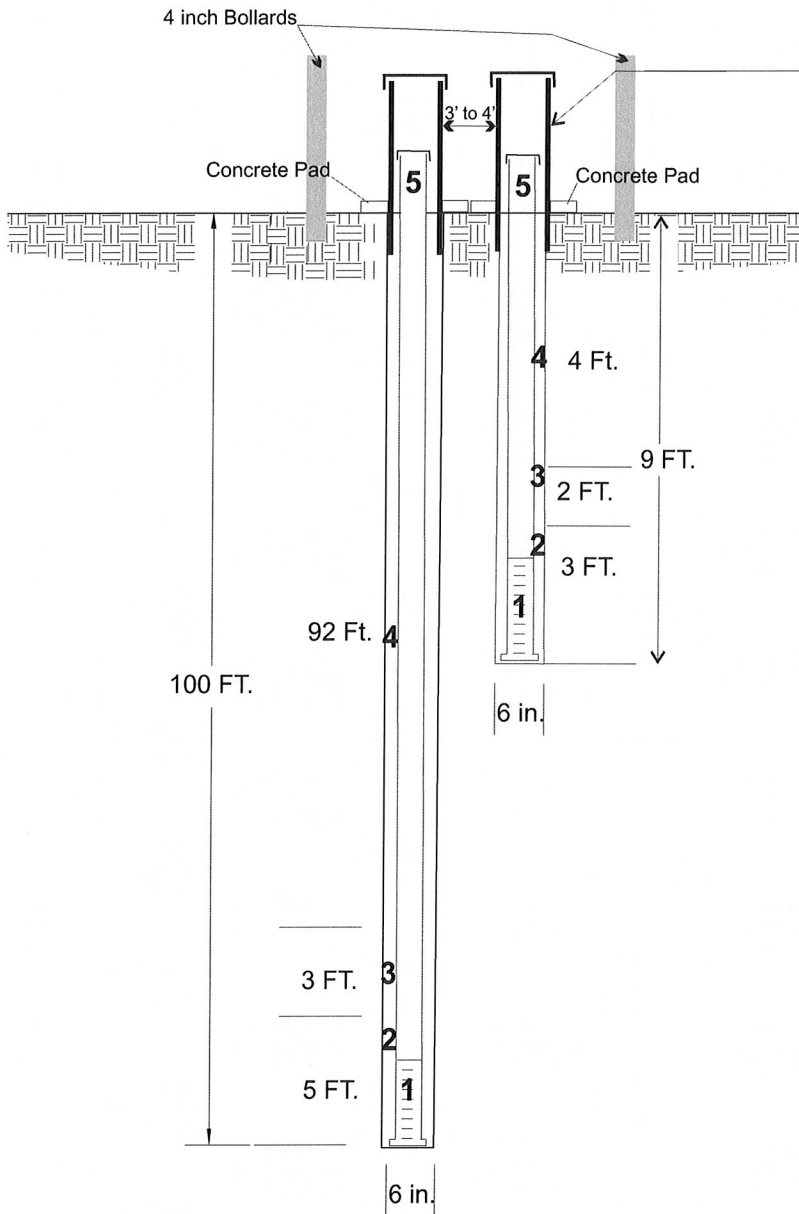

Well Casing in 6" Protective PVC
Casing w/ Cover - Well Casing
~1.25 feet over top of concrete pad.

5 = WELL CASING TYPE AND SIZE
2" dia Schedule 40 PVC

4 = BACKFILL
Neat Cement Grout

3 = SEAL TYPE
Bentonite Chips

2 = FILTER TYPE
20 - 30 Quartz fine sand

1 = WELL SCREEN TYPE
2 feet of 2" dia Schedule 40 PVC w/ 0.02 slot

NOT TO SCALE



MONITOR WELL CONSTRUCTION DIAGRAM