



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County DADE
 Station I.D. 0250000027
 Date 09/18/97 Well No. ST. HUGH #1
 Latitude 25 43 38 Longitude 80 14 38 X=748925 Y=507241
NE 1/4 NW 1/4 NW 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: L. HUNTER
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION


Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 40' Casing Depth Logger 40'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 3 3/4" From 0' To 99' Dia. NA From NA To NA
 Type of Casing P.V.C. Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

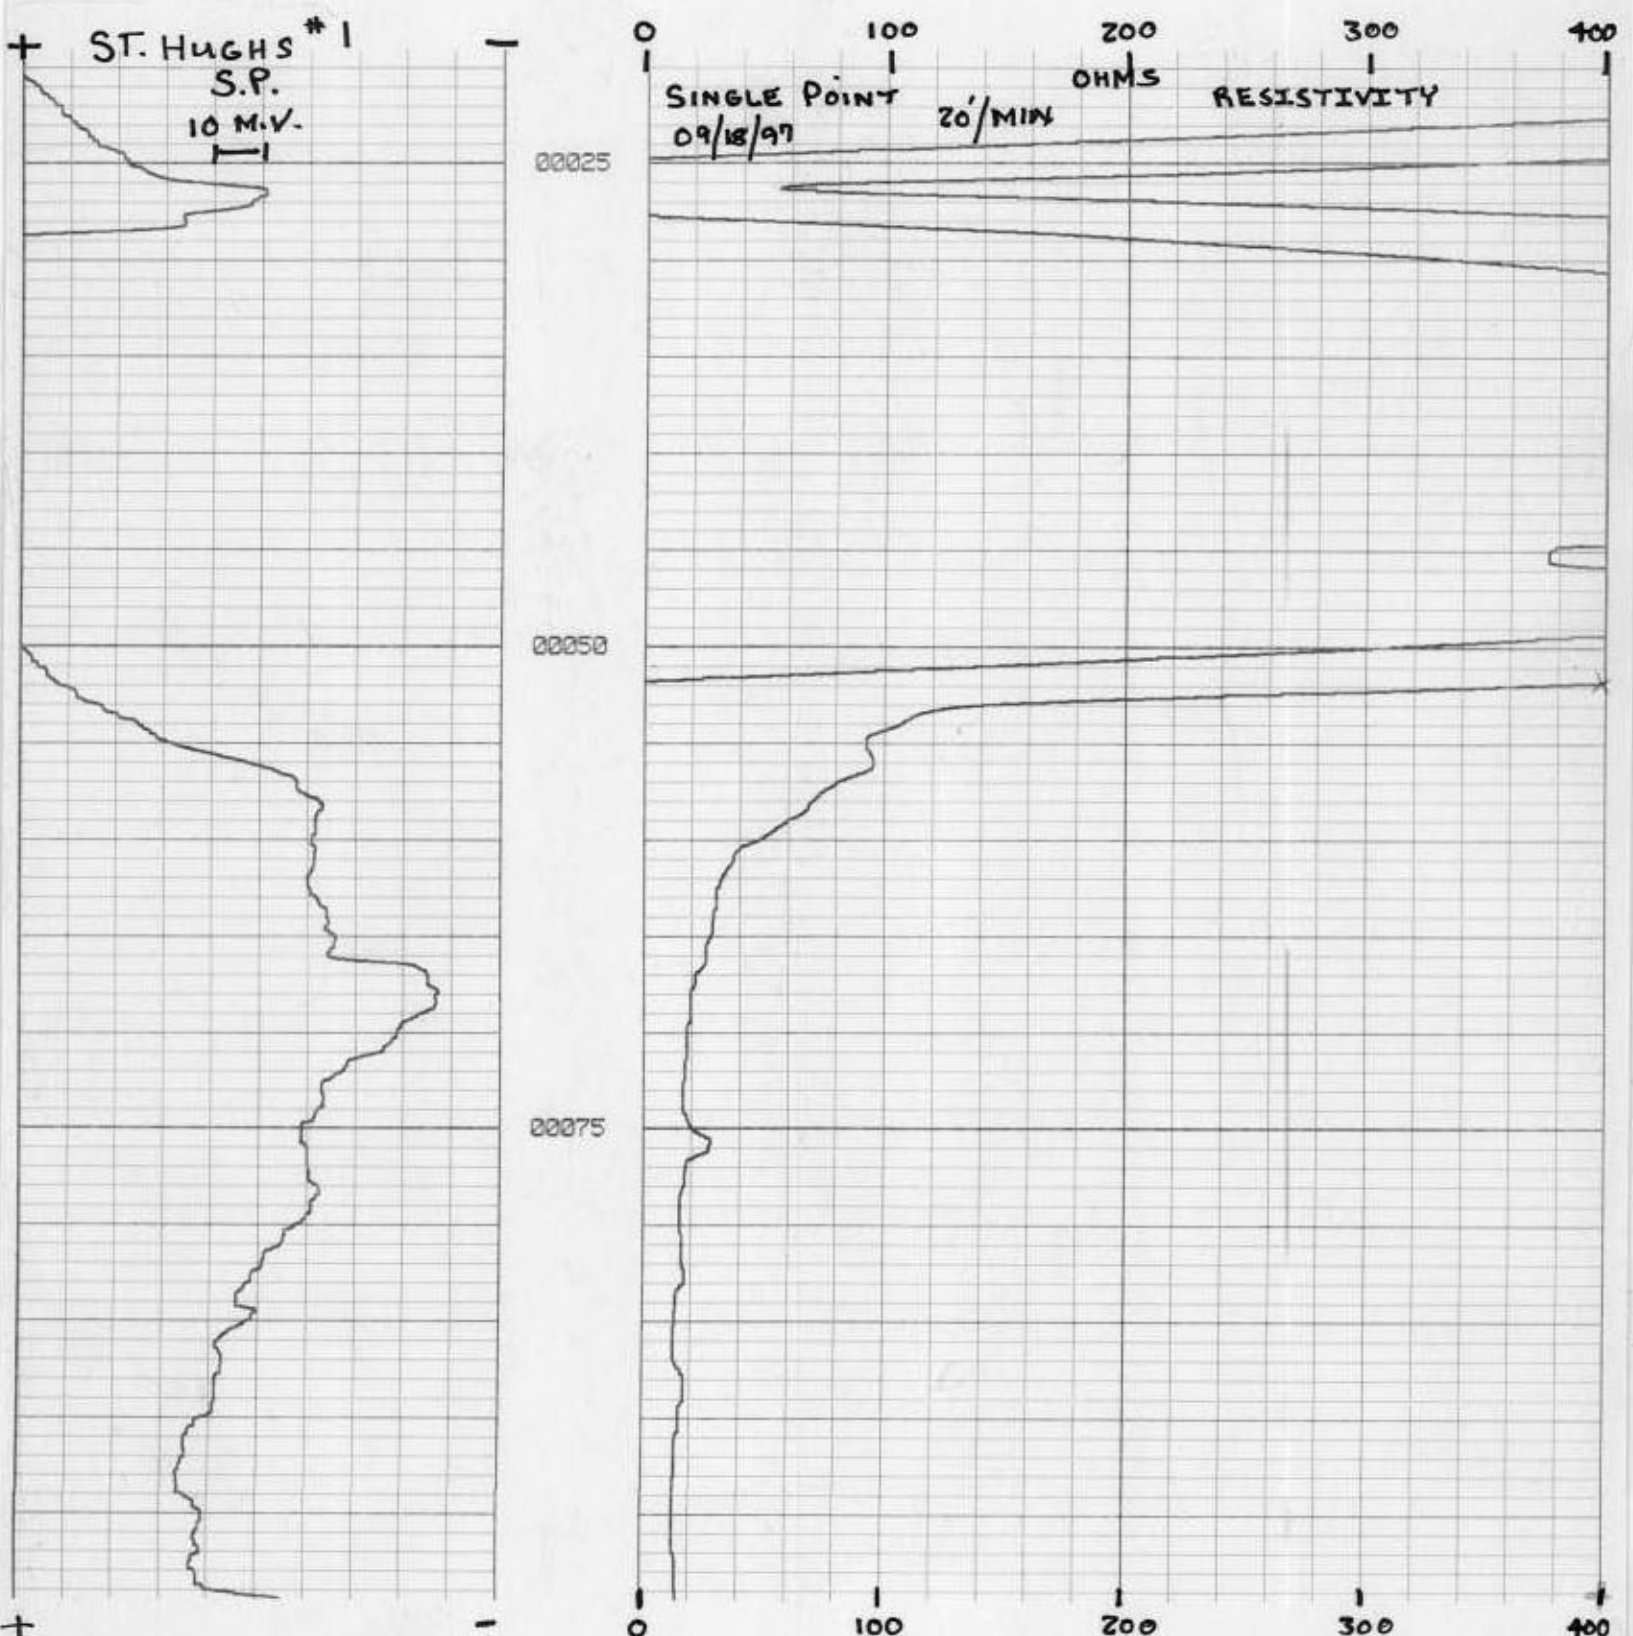



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County DADE
Station I.D. 025000027
Date 09/18/97 Well No. ST. HUGH #1
Latitude 25 43 38 Longitude 80 14 38 X=748925 Y=507241
NE 1/4 NW 1/4 NW 1/4 SE 1/4 Section 21 Township 54S Range 40E
Owner U.S.G.S. Phone ?
Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
Cl NA mg/l Type of Fluid DRILLING MUD
Temp. NA o/C Field Density NA o/C
T.D.S. NA mg/l Spec. Cond. NA umhos/cm
Logged By: E.P. DAUENHAUER Witnessed By: L. HUNTER

Scale NA

Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
T. Depth-Driller 99' T. Depth-Logger 99'
Casing Depth Driller 40' Casing Depth Logger 40'
Bit Size 4" Casing Dia. I.D. 4"
Hole Dia. 3 3/4" from 0' To 99' Dia. NA From NA To NA
Type of Casing P.V.C. Casing Thickness NA
Type of Screen OPEN HOLE Screen Int. From NA To NA
Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 5'	()	Density	()
Caliper	<input checked="" type="checkbox"/>	ccl	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(X)	Temperature	()
Neutron	(X)	Delta Temp.	()
Natural Gamma	(X)	SP	(X)
Fluid Resistivity	()	Single PL	(X)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

ST. HUGH #1

2" 4" 6" 8" 10"
CALIPER HOLE DIA
20'/MIN 09/18/97

00025

00050

00075

2" 10"



SOUTH FLORIDA WATER MANAGEMENT DISTRICT WELL LOG

WELL LOCATION

County DADE
 Station I.D. 0250000027
 Date 09/18/97 Well No. ST. HUGH #1
 Latitude 25 43 38 Longitude 80 14 38 X=748925 Y=507241
NE 1/4 NW 1/4 NW 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: L. HUNTER
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 I. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 40' Casing Depth Logger 40'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 3 3/4" from 0' To 99' Dia. NA From NA To NA
 Type of Casing P.V.C. Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Caliper	(X)	cal	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(●)	Temperature	()
Neutron	(X)	Delta Temp.	()
Natural Gamma	(X)	SP	(●)
Fluid Resistivity	()	Single Pt.	(X)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

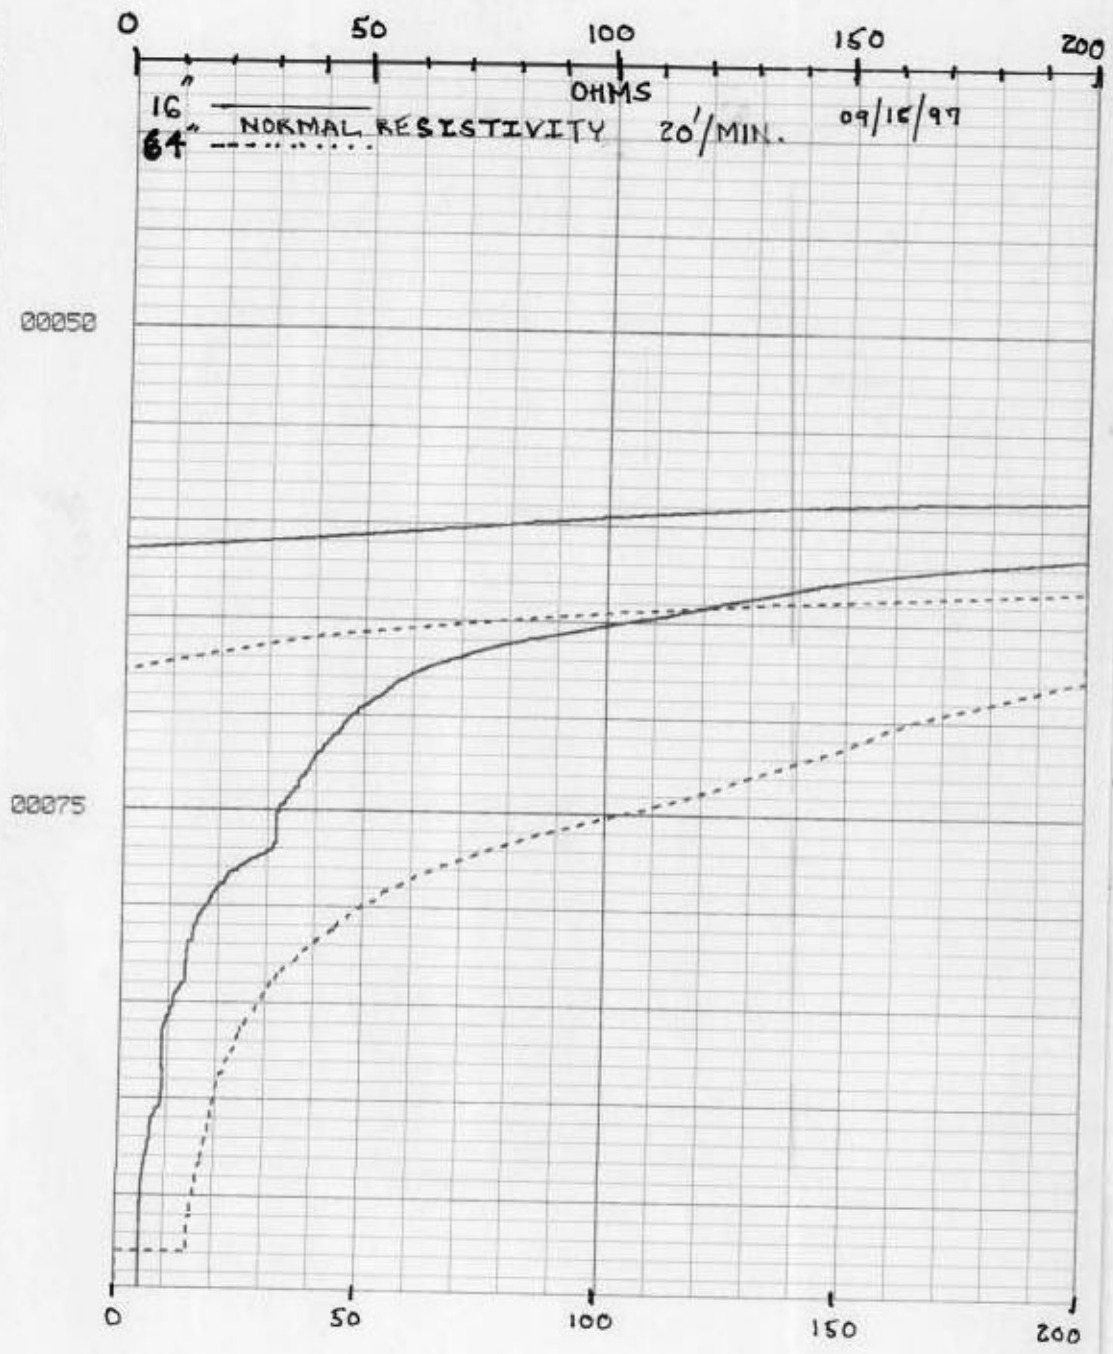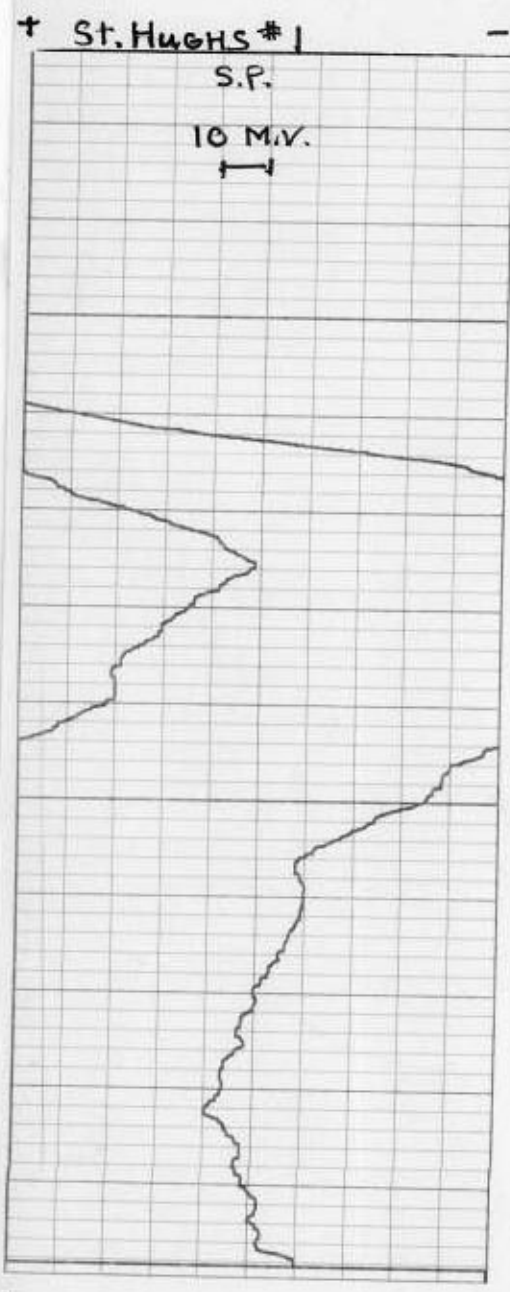



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000027
 Date 09/18/97 Well No. ST. HUGH #1
 Latitude 25 43 38 Longitude 80 14 38 X=748925 Y=507241
NE 1/4 NW 1/4 NW 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: L. HUNTER
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 40' Casing Depth Logger 40'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 3 3/4" from 0' To 99' Dia. NA From NA To NA
 Type of Casing P.V.C. Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR


TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Caliper	(X)	ccl	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(X)	Temperature	()
Neutron	()	Delta Temp.	()
Natural Gamma	()	SP	(X)
Fluid Resistivity	()	Single Pt.	(X)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

ST. HUGH #1

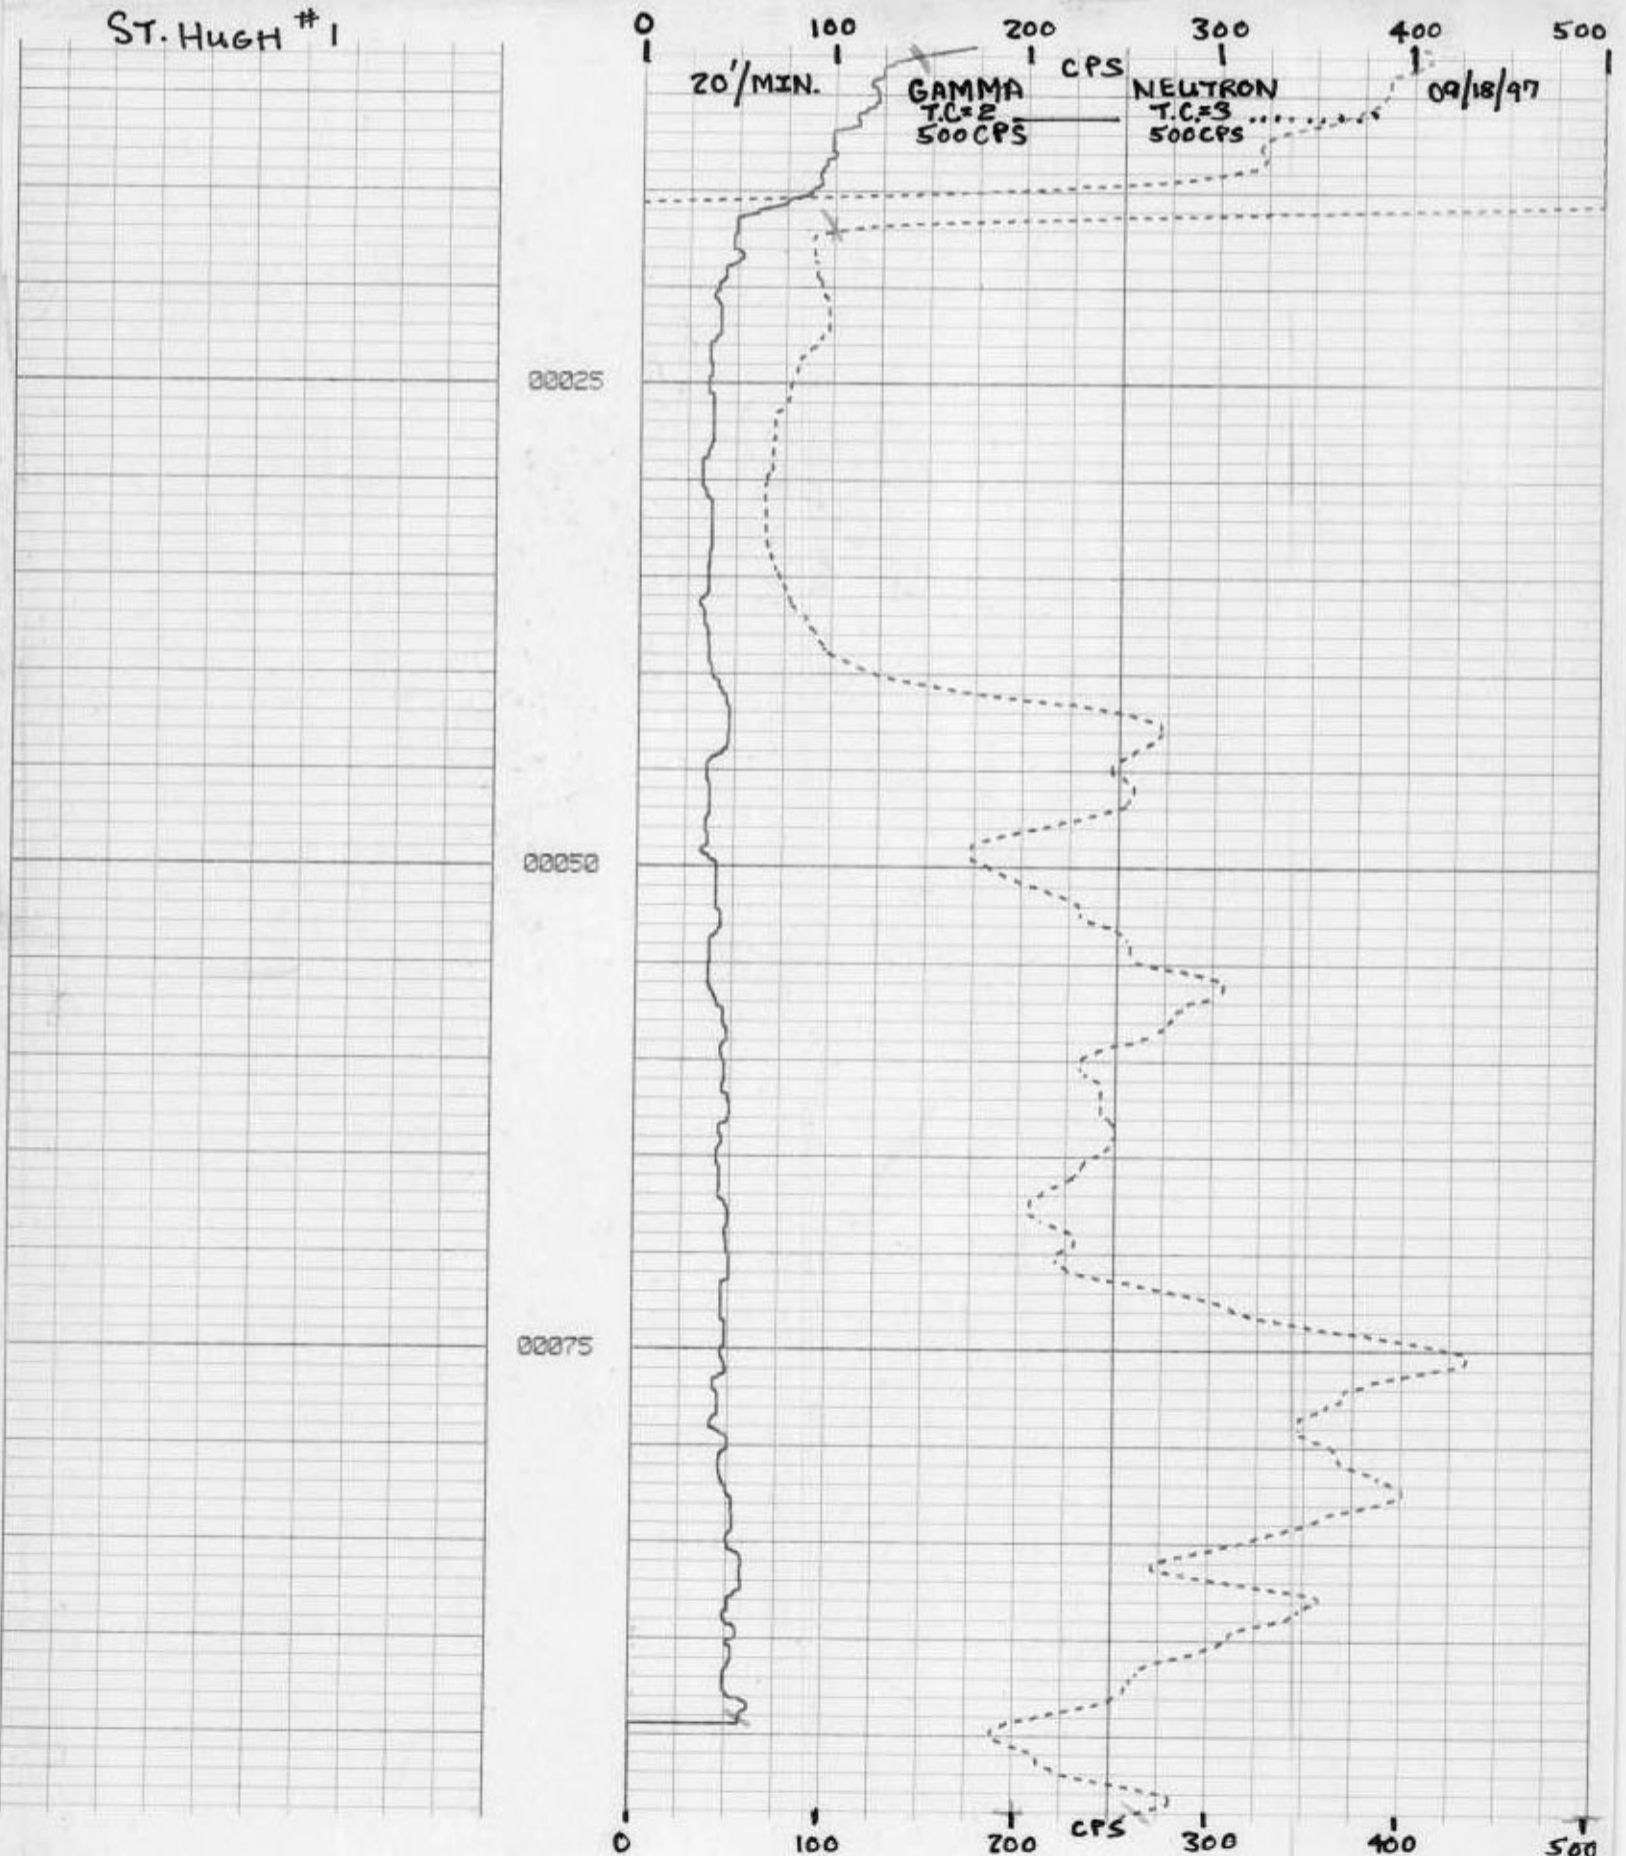



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000027
 Date 09/18/97 Well No. ST. HUGH #1
 Latitude 25 43 38 Longitude 80 14 38 X=748925 Y=507241
NE 1/4 NW 1/4 NW 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: L. HUNTER
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 40' Casing Depth Logger 40'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 3 3/4" from 0' To 99' Dia. NA From NA To NA
 Type of Casing P.V.C. Casing Thickness NA
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

