



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION
 County DADE
 Station I.D. 0250000028
 Date 09/19/97 Well No. PEACOCK PARK #1
 Latitude 25 43 34 Longitude 80 14 27
SW1/4 NW1/4 NE1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM
 L.S. +15.00' T.O.C. +1.30'



FLUID QUALITY
 Date NA Time NA Source of Sample NA
 Cl- NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: B. McANDREWS
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION
 Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 50' Casing Depth Logger 50'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 4" From 0' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Coliper	(X)	ccl	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(X)	Temperature	()
Neutron	()	Delta Temp.	()
Natural Gamma	(X)	SP	(X)
Fluid Resistivity	()	Single Pt.	(X)

COMMENTS
 LOGS WERE RUN THROUGH TEMPORARY CASING.
 POOR ELECTRIC LOGS DUE TO INFLUENCE BY SALINE WATER FROM THE BAY.

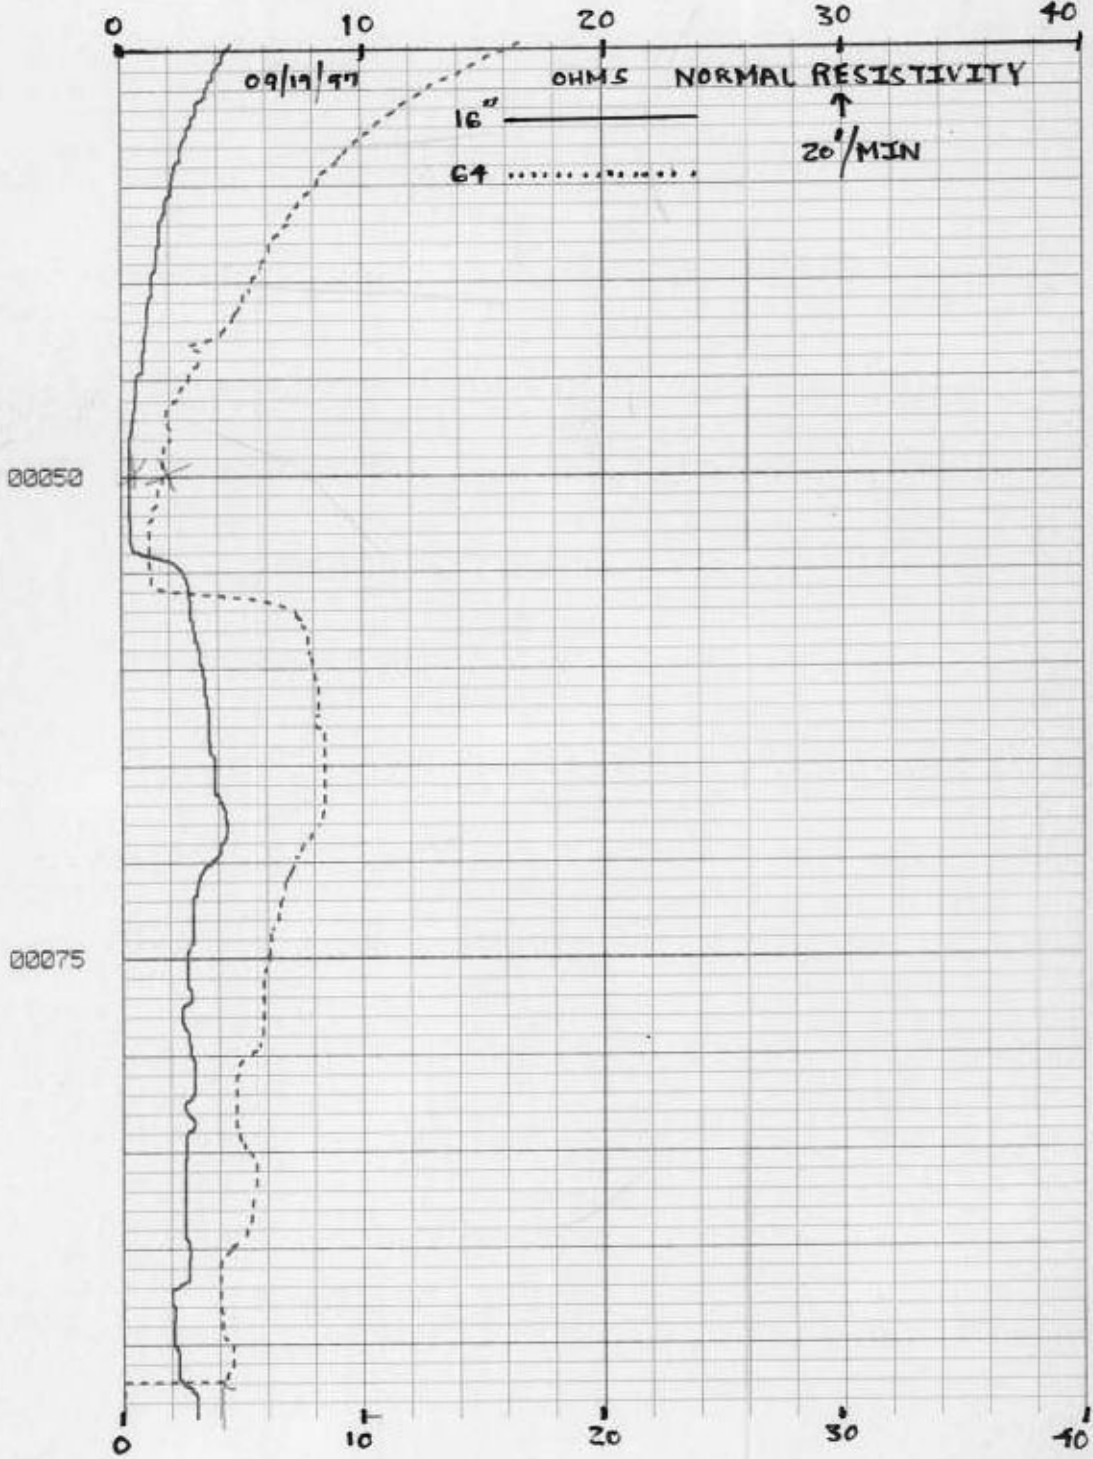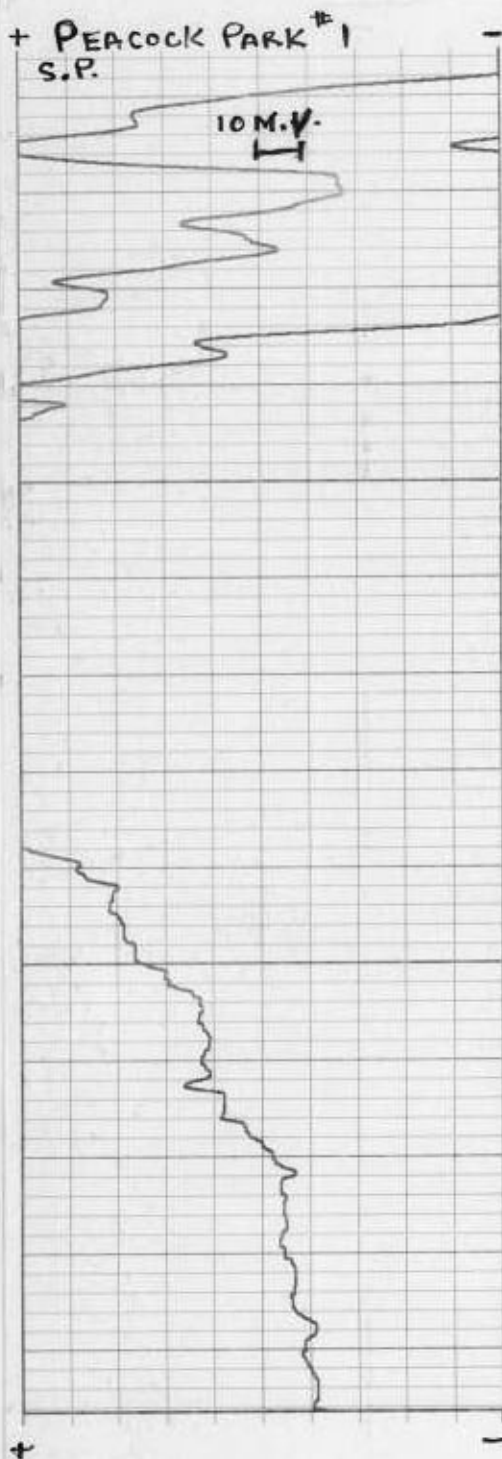



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County DADE
 Station I.D. 0250000028
 Date 09/19/97 Well No. PEACOCK PARK #1
 Latitude 25 43 34 Longitude 80 14 27
 SW1/4 NW1/4 NE 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINOLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: B. McANDREWS
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 50' Casing Depth Logger 50'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 4" From 0' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR



TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

POOR ELECTRIC LOGS DUE TO INFLUENCE BY SALINE WATER FROM THE BAY.

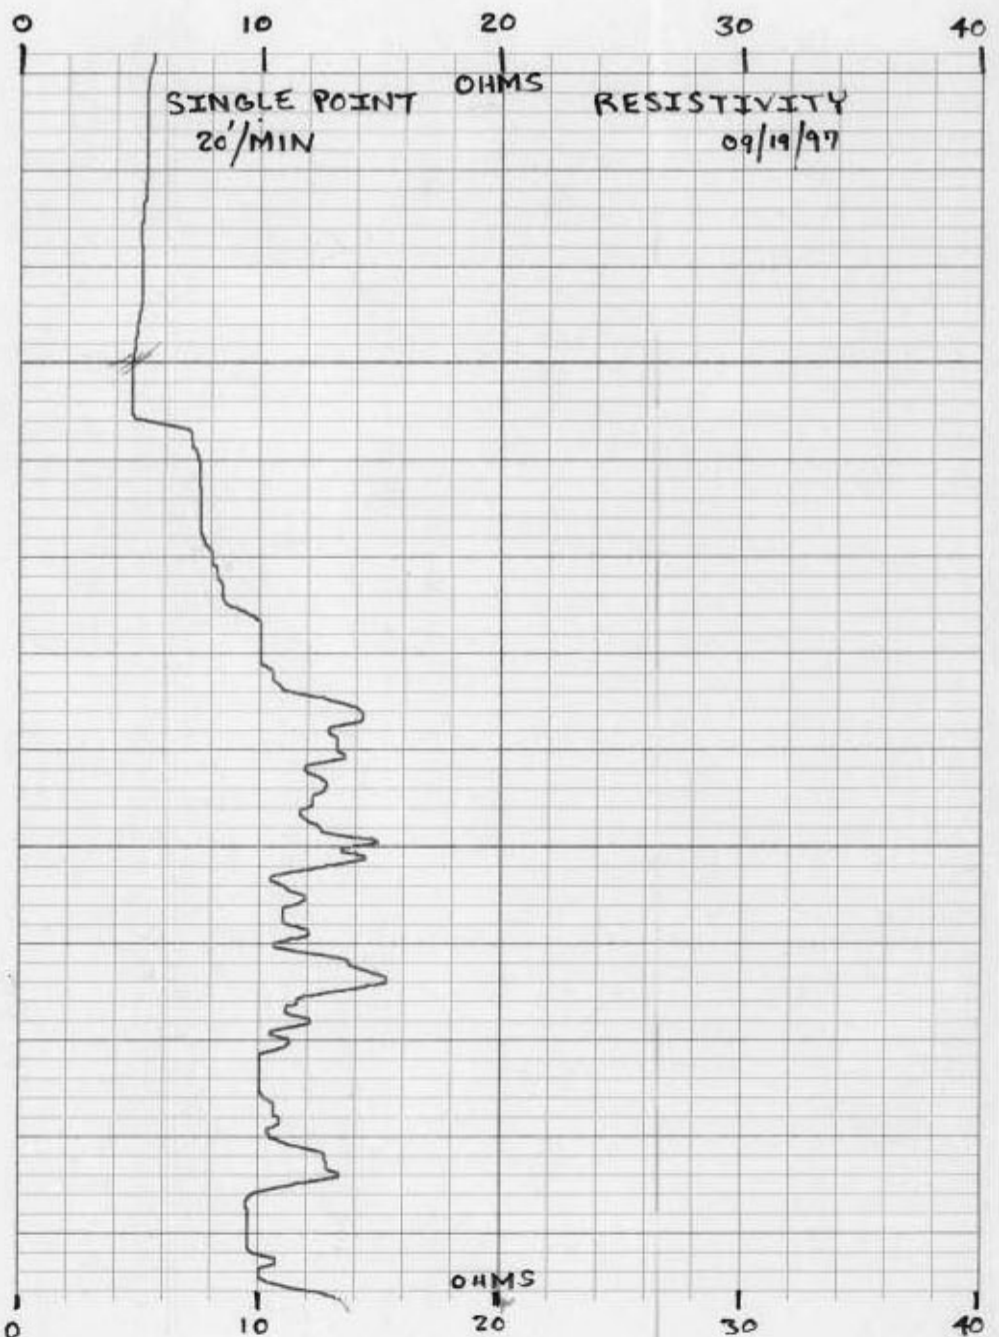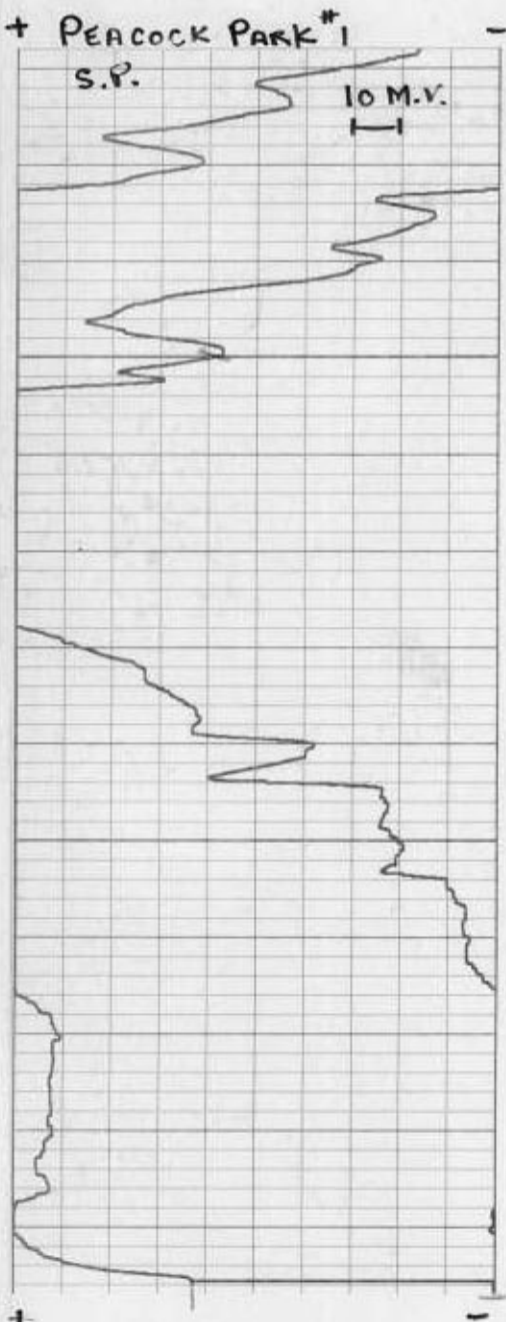



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 025000028
 Date 09/19/97 Well No. PEACOCK PARK #1
 Latitude 25 43 34 Longitude 80 14 27
 SW1/4 NW1/4 NE1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 CINA mg/l Type of Fluid DRILLING MUD
 Temp. NA °C Field Density NA °C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: B. McANDREWS
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 50' Casing Depth Logger 50'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 4" From 0' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR


TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Caliper	(x)	cd	()
Flow meter	()	Fluid Sampler	()
16", 84" normals	(x)	Temperature	()
Neutron	()	Delta Temp.	()
Natural Gamma	(●)	SP	(x)
Fluid Resistivity	()	Single Pt.	(x)

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

POOR ELECTRIC LOGS DUE TO INFLUENCE BY SALINE WATER FROM THE BAY.

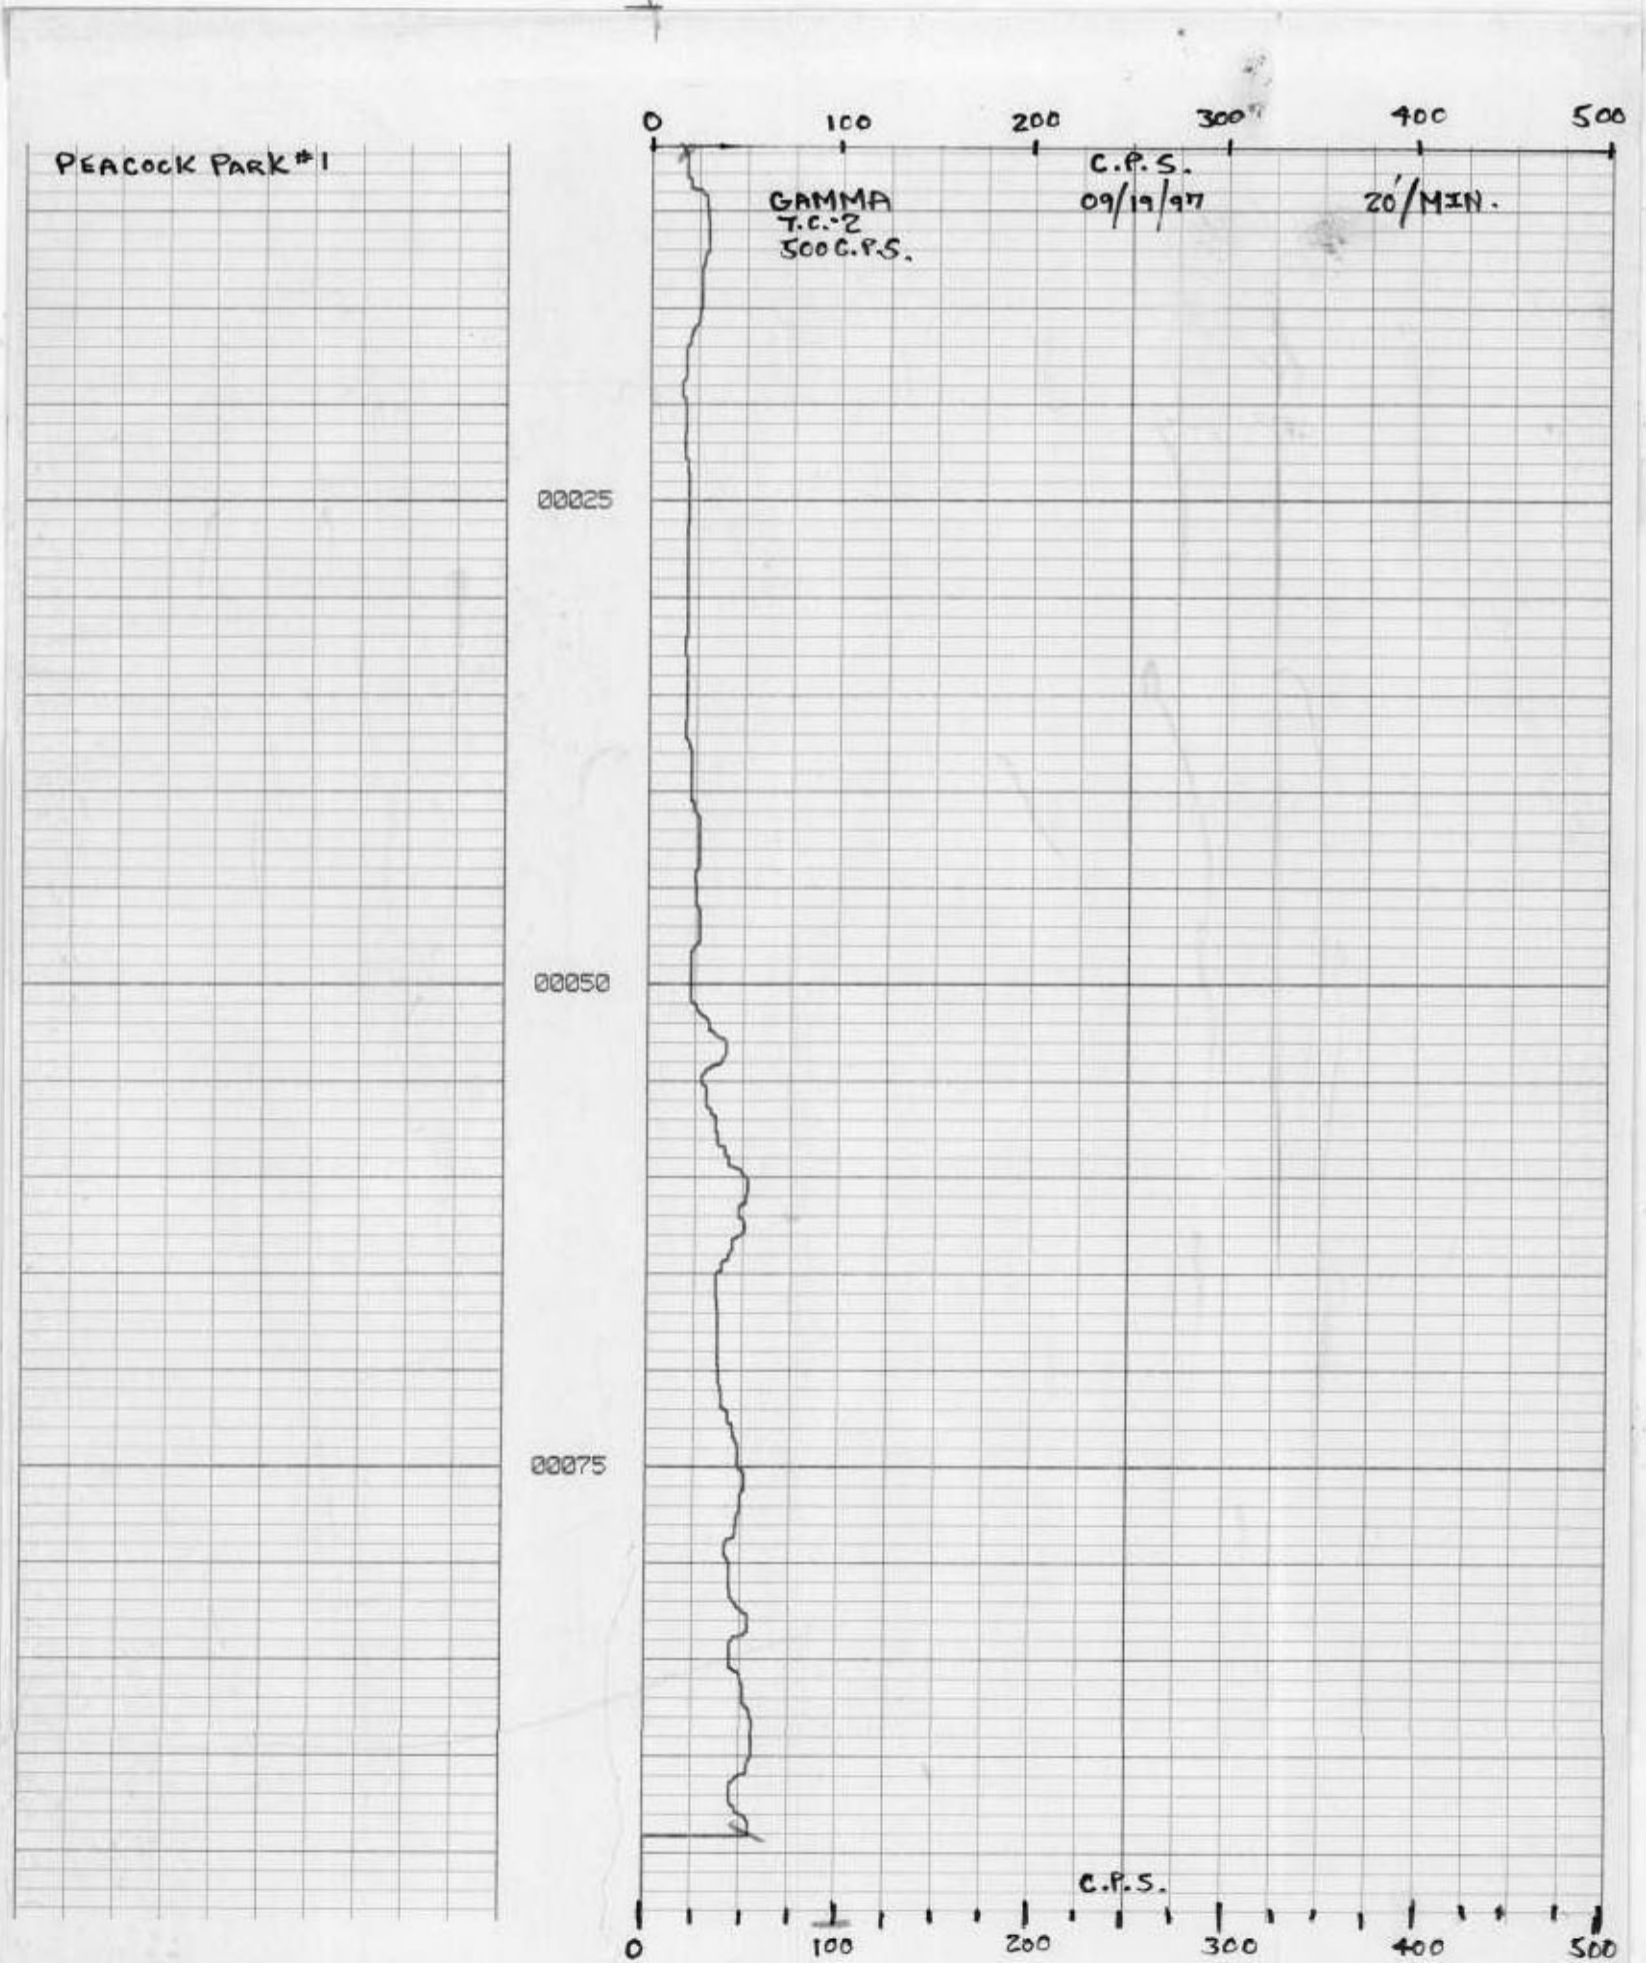



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 025000028
 Date 09/19/97 Well No. PEACOCK PARK #1
 Latitude 25 43 34 Longitude 80 14 27
 SW1/4 NW1/4 NE 1/4 SE 1/4 Section 21 Township 54S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +15.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 CINA mg/l Type of Fluid DRILLING MUD
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: B. McANDREWS
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 99' T. Depth-Logger 99'
 Casing Depth Driller 50' Casing Depth Logger 50'
 Bit Size 4" Casing Dia. I.D. 4"
 Hole Dia. 4" From 0' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOGS WERE RUN THROUGH TEMPORARY CASING.

POOR ELECTRIC LOGS DUE TO INFLUENCE BY SALINE WATER FROM THE BAY.

PEACOCK PARK #1

2" 4" 6" 8" 10" 12"
 CALIPER HOLE DIA. 09/19/97 20'/MIN

