



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station ID 0250000030
 Date 11/06/97 Well No. MOWRY CANAL #1
 Latitude 25 28 12 Longitude 80 20 49 X=715456 Y=413576
 SW1/4 SW1/4 SW1/4 NW1/4 Section 16 Township 57S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled 11/06/97

DATUM

L.S. +3.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA @ o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION


Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 100' T. Depth-Logger 99'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 3 7/8" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATORY/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

LOW RESISTIVITY CURVES DUE TO HIGH CHLORIDE BOREHOLE FLUID.

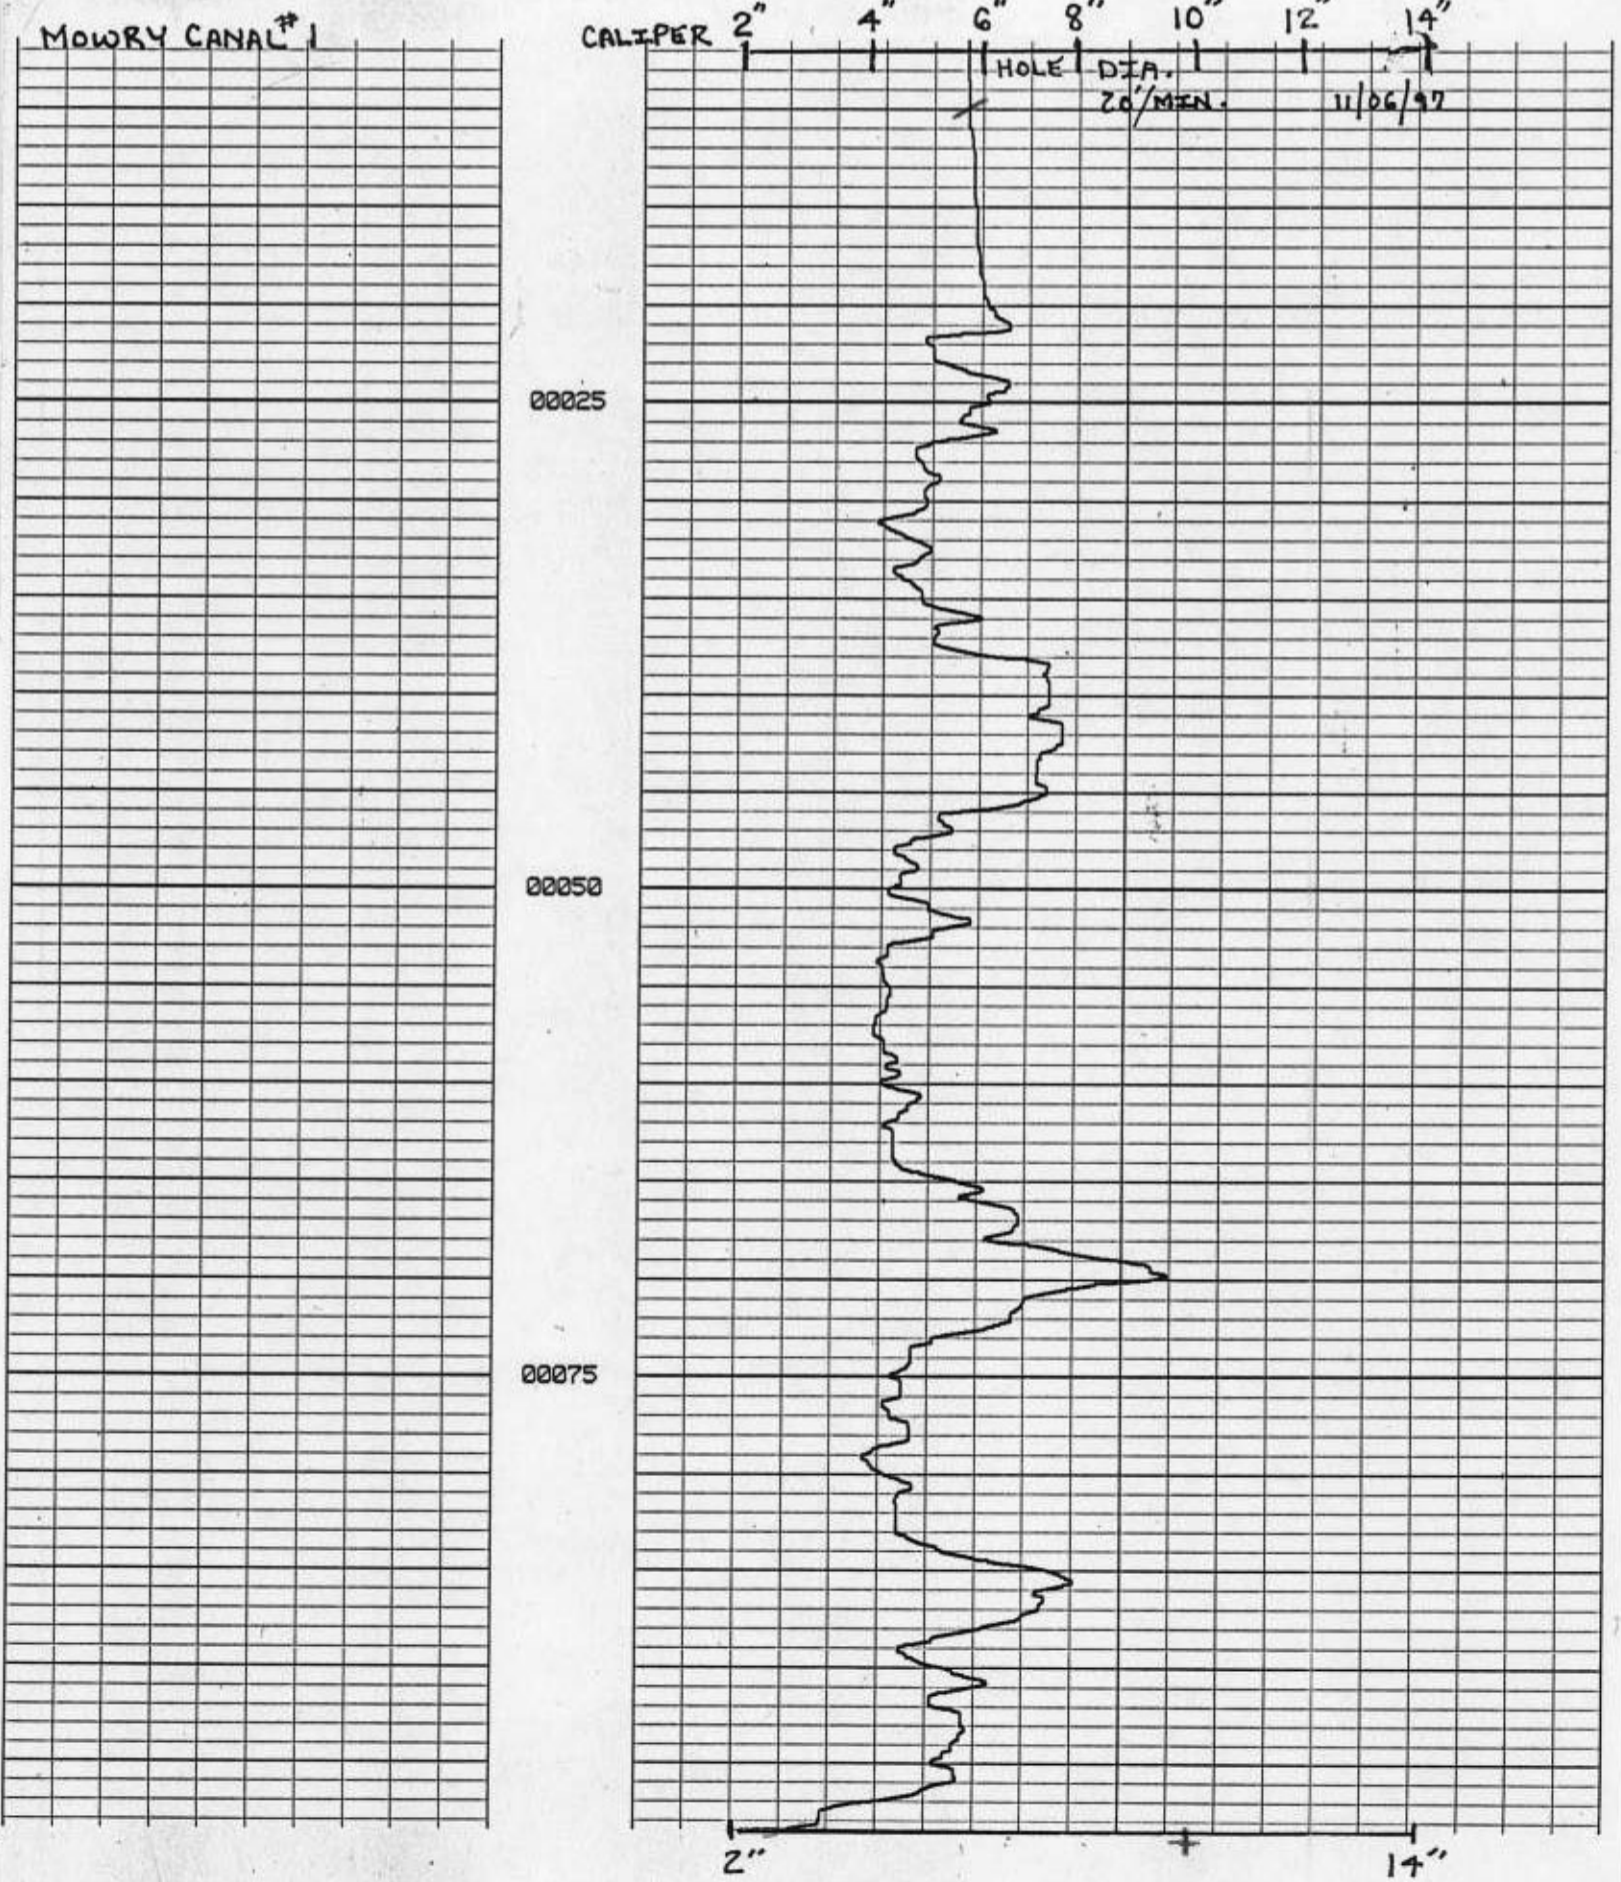



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station ID 025000030
 Date 11/06/97 Well No. MOWRY CANAL #1
 Latitude 25 28 12 Longitude 80 20 49 X=715456 Y=413578
SW1/4 SW1/4 SW1/4 NW1/4 Section 16 Township 57S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled 11/06/97

DATUM

L.S. +3.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA o/c
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CI Auger Other WIRE LINE CORE
 T. Depth-Driller 100' T. Depth-Logger 99'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 3 7/8" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATORY/MONITOR

TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Caliper	(X)	cci	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(X)	Temperature	()
Neutron	(●)	Delta Temp.	()
Natural Gamma	(●)	SP	(X)
Fluid Resistivity	()	Single PL	(X)

COMMENTS

LOW RESISTIVITY CURVES DUE TO HIGH CHLORIDE BOREHOLE FLUID.

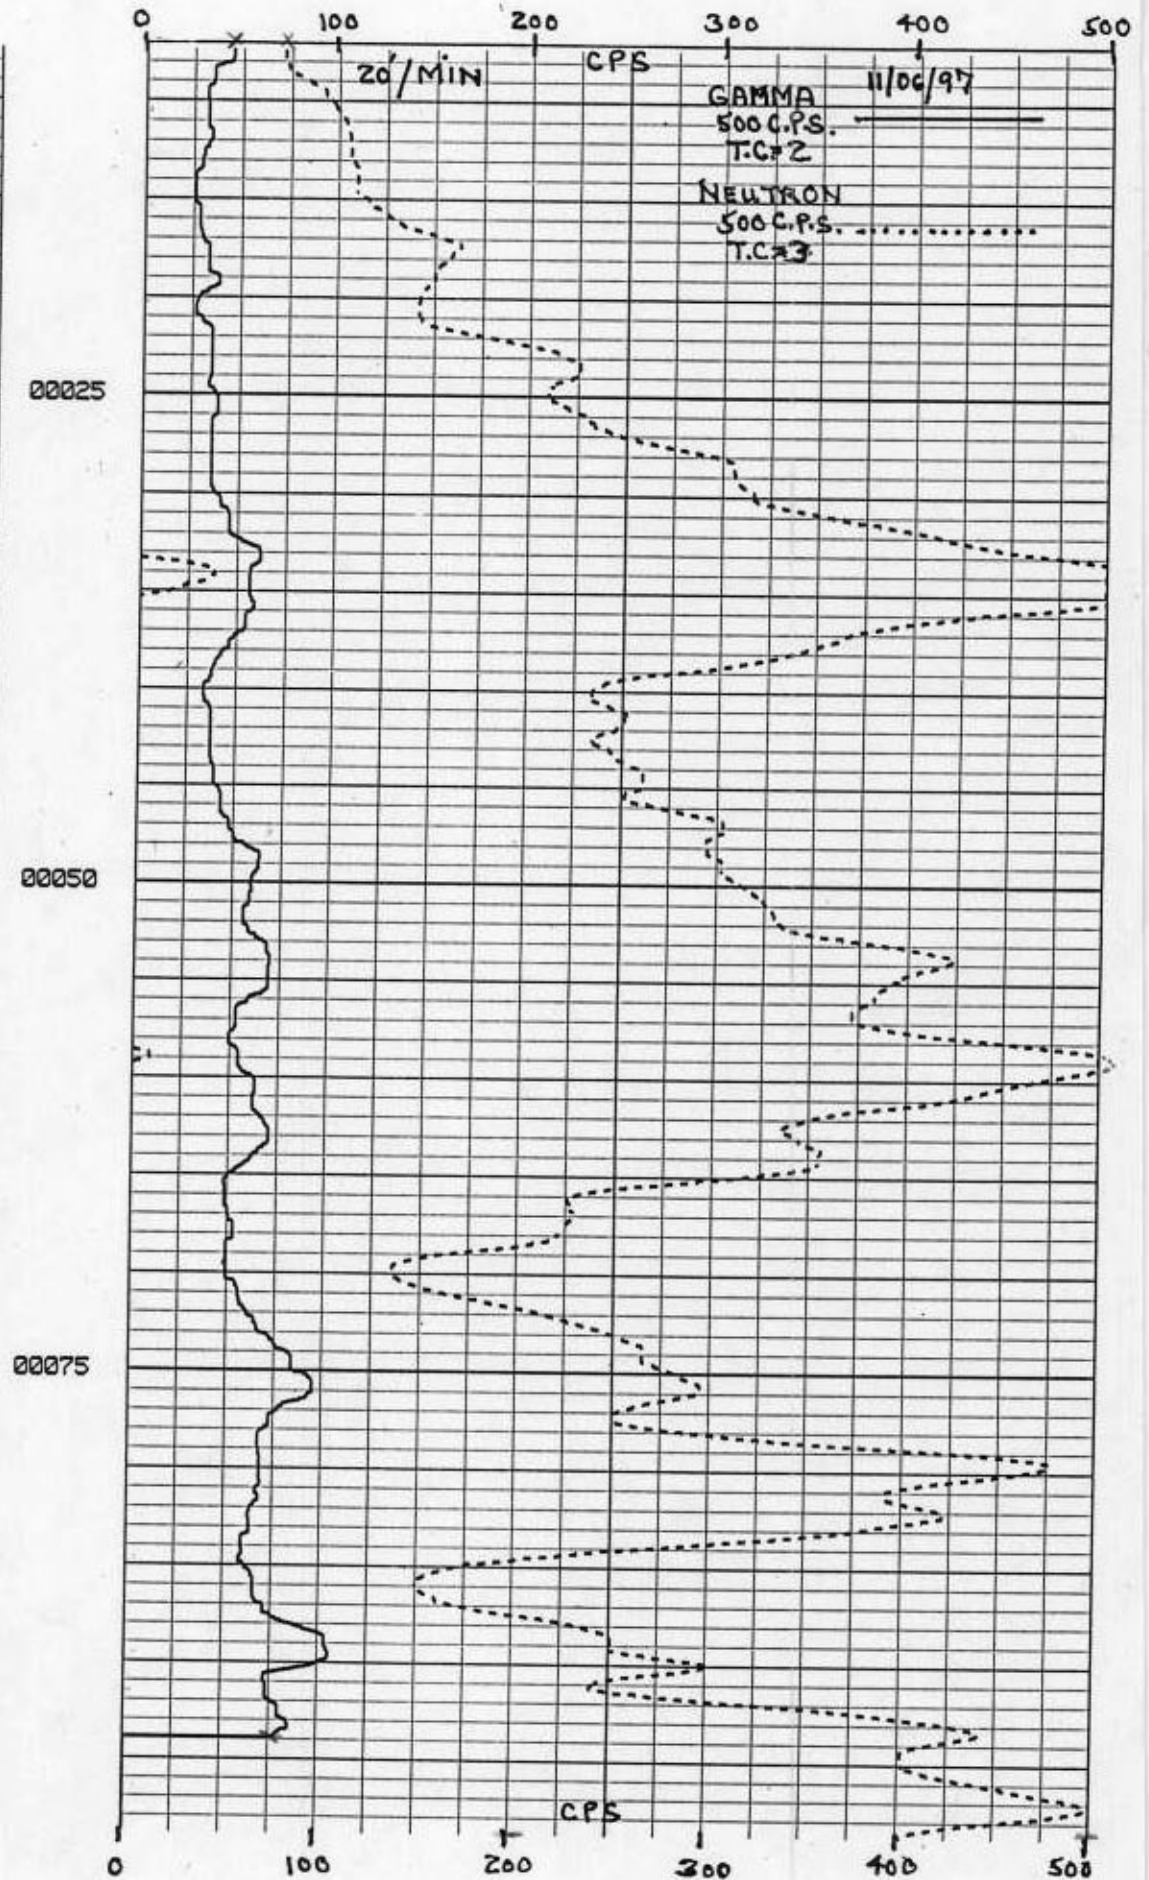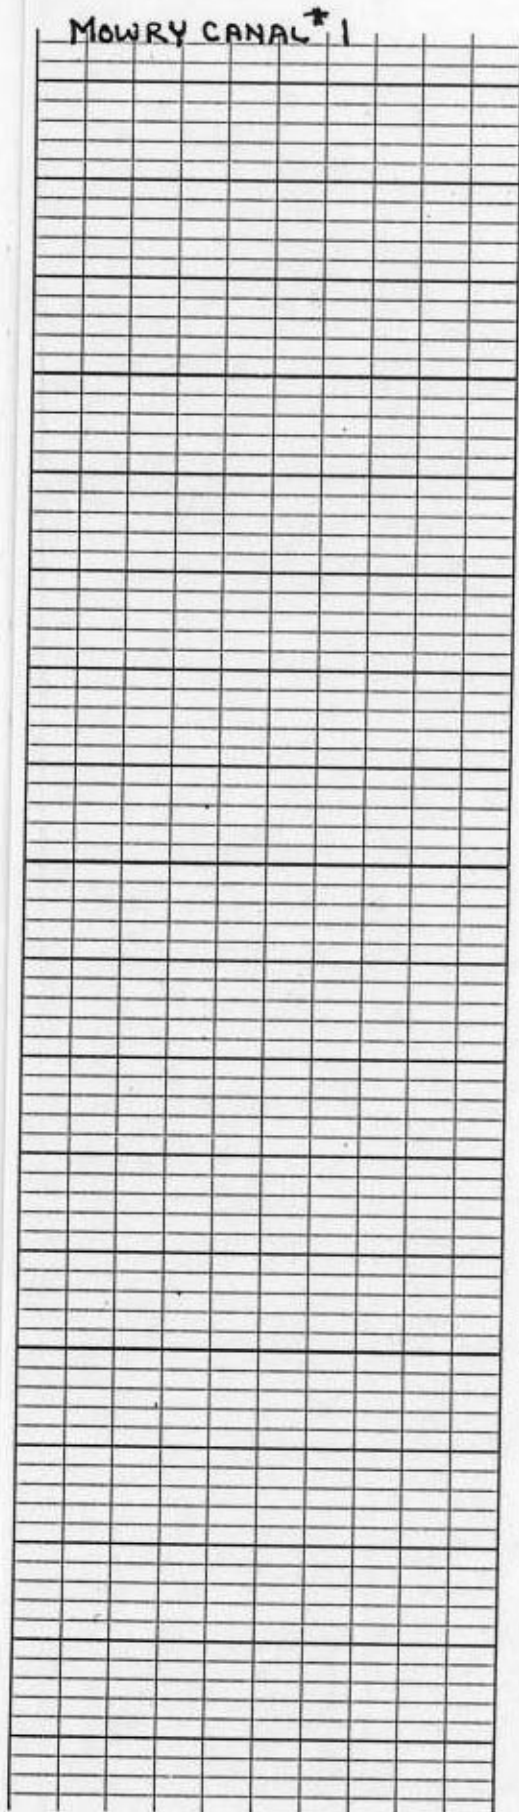



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000030
 Date 11/06/97 Well No. MOWRY CANAL #1
 Latitude 25 28 12 Longitude 80 20 49 X=715456 Y=413576
SW1/4 SW1/4 SW1/4 NW1/4 Section 16 Township 57S Range 40E
 Owner U.S.G.S. Phone 7
 Driller J. TRINDLE Date Drilled 11/06/97

DATUM

L.S. +3.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 100' T. Depth-Logger 99'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 3 7/8" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATORY/MONITOR

TYPE OF SURVEYS RUN

Lateral 6" () Density ()
 Caliper () ccl ()
 Flow meter () Fluid Sampler ()
 16", 64" normals () Temperature ()
 Neutron () Delta Temp. ()
 Natural Gamma () SP ()
 Fluid Resistivity () Single PL ()

COMMENTS

LOW RESISTIVITY CURVES DUE TO HIGH CHLORIDE BOREHOLE FLUID.

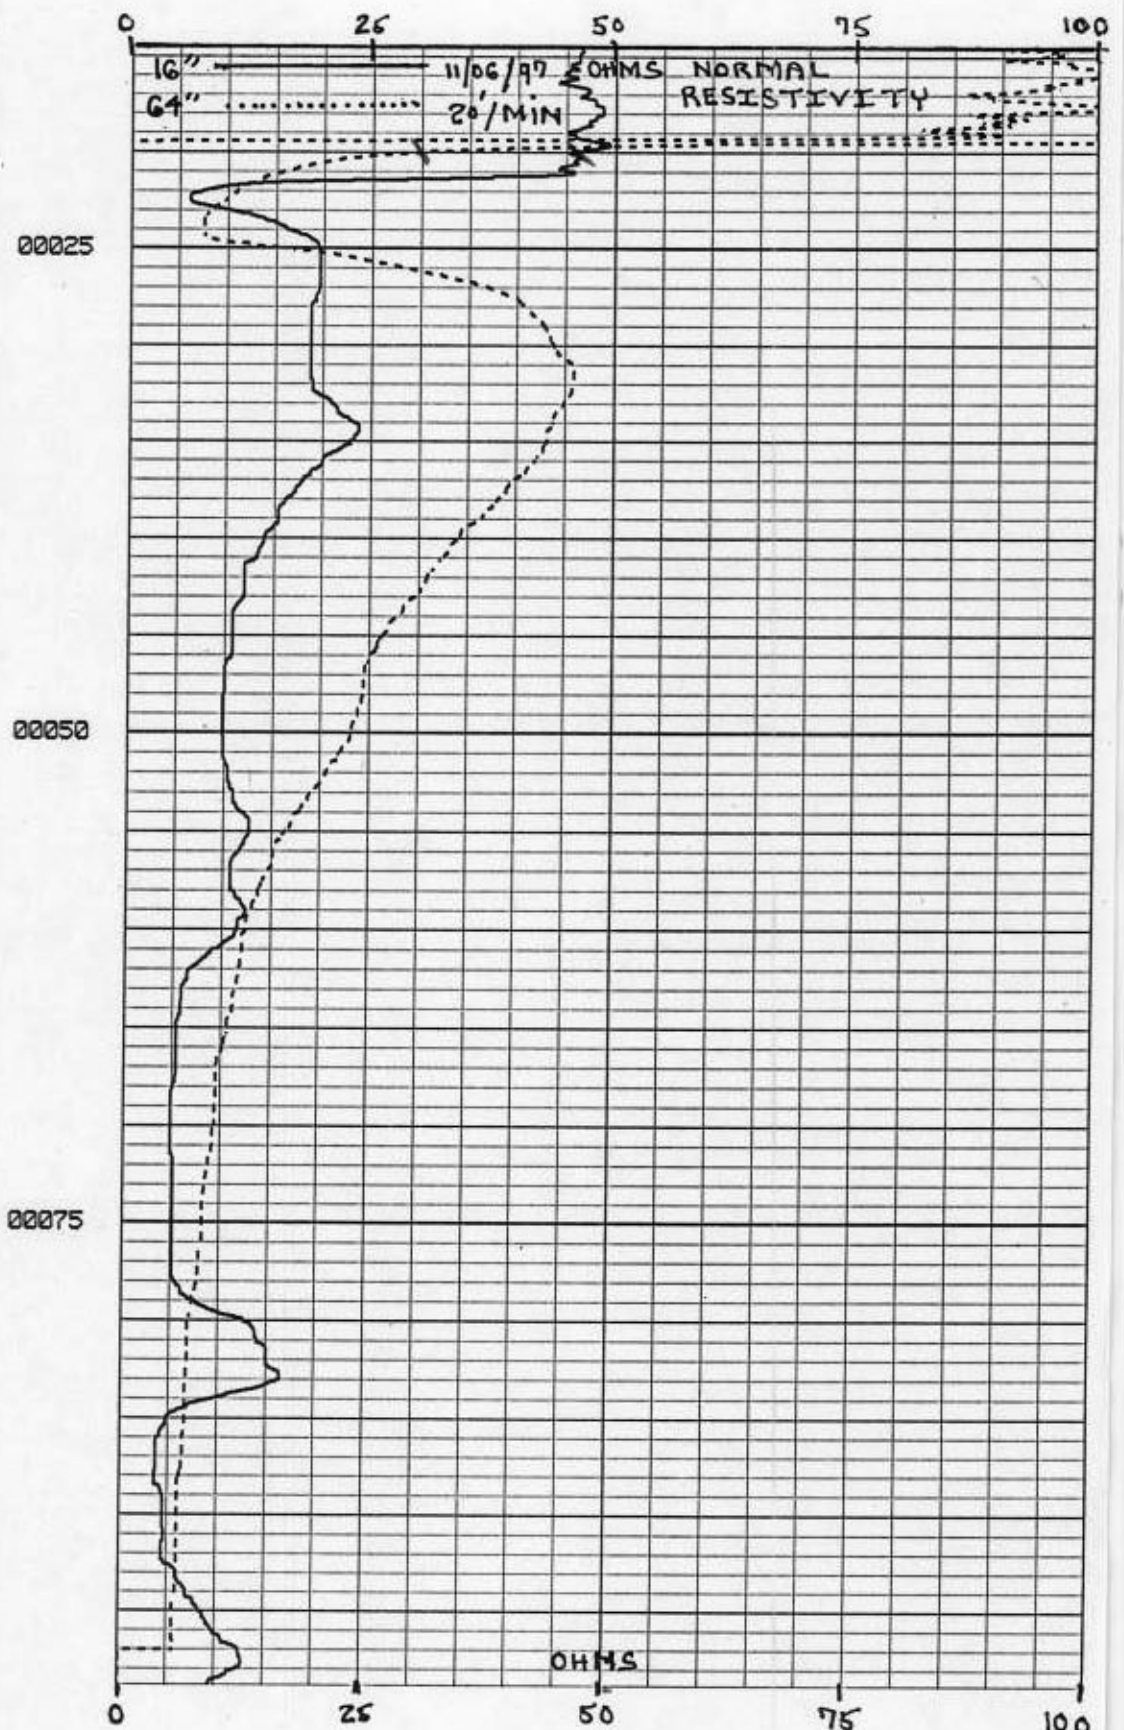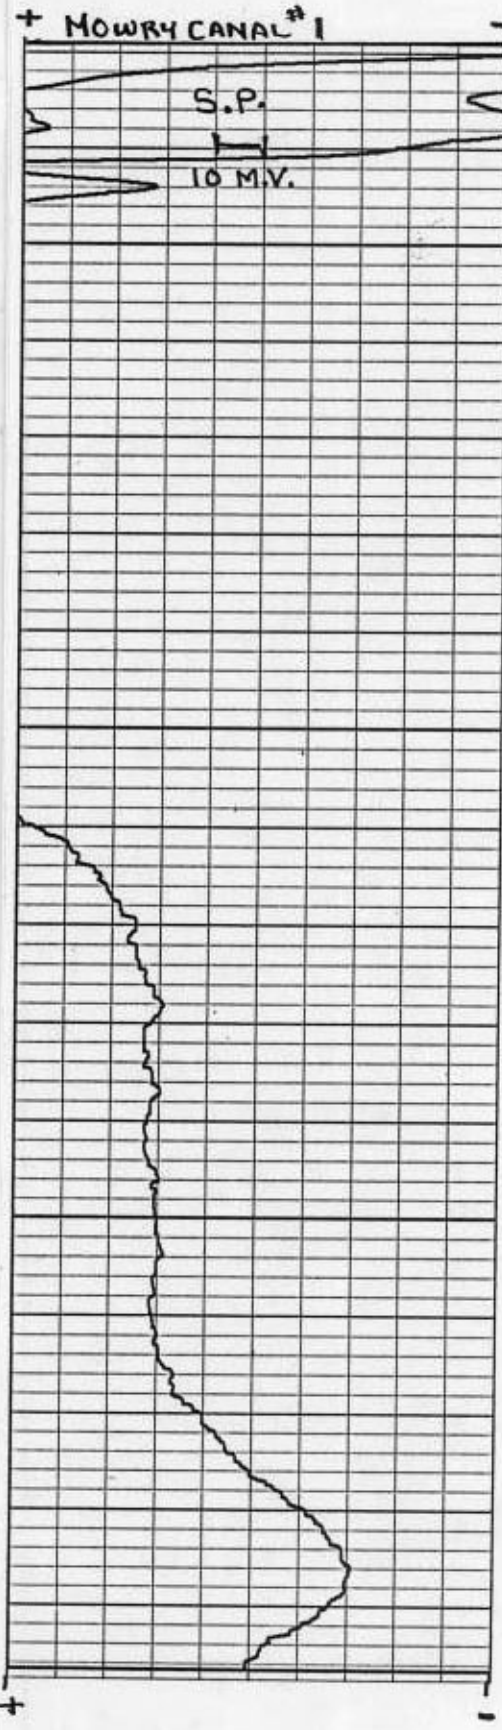



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County DADE
 Station I.D. 0250000030
 Date 11/06/97 Well No. MOWRY CANAL #1
 Latitude 25 28 12 Longitude 80 20 49 X=715458 Y=413576
SW1/4 SW1/4 SW1/4 NW1/4 Section 16 Township 57S Range 40E
 Owner U.S.G.S. Phone T
 Driller J. TRINDLE Date Drilled 11/06/97

DATUM

L.S. +3.00' T.O.C. +1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. NA °C Field Density NA @ °C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: RoL Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 100' T. Depth-Logger 99'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 3 7/8" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 99' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATORY/MONITOR

TYPE OF SURVEYS RUN

Lateral 6'	()	Density	()
Caliper	(X)	cd	()
Flow meter	()	Fluid Sampler	()
16", 64" normals	(X)	Temperature	()
Neutron	(X)	Delta Temp.	()
Natural Gamma	(X)	SP	●
Fluid Resistivity	()	Single Pt.	●

COMMENTS

LOW RESISTIVITY CURVES DUE TO HIGH CHLORIDE BOREHOLE FLUID.

