



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000029
 Date 10/16/97 Well No. HIGH HOPE NURSERY #1
 Latitude 25 28 25 Longitude 80 22 12 X=707843 Y=414852
 NW1/4 NE1/4 SW1/4 NE 1/4 Section 18 Township 57S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled 10/16/97

DATUM

L.S. +4.00' T.O.C. L.S.

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid WATER
 Temp. NA o/C Field Density NA @ o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 102' T. Depth-Logger 64'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 4" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 64' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' () Density ()
 Caliper ccl ()
 Flow meter () Fluid Sampler ()
 16", 64" normals Temperature ()
 Neutron Delta Temp. ()
 Natural Gamma SP
 Fluid Resistivity () Single Pt.

COMMENTS

PARTIAL LOGS DUE TO CAVING BOREHOLE.

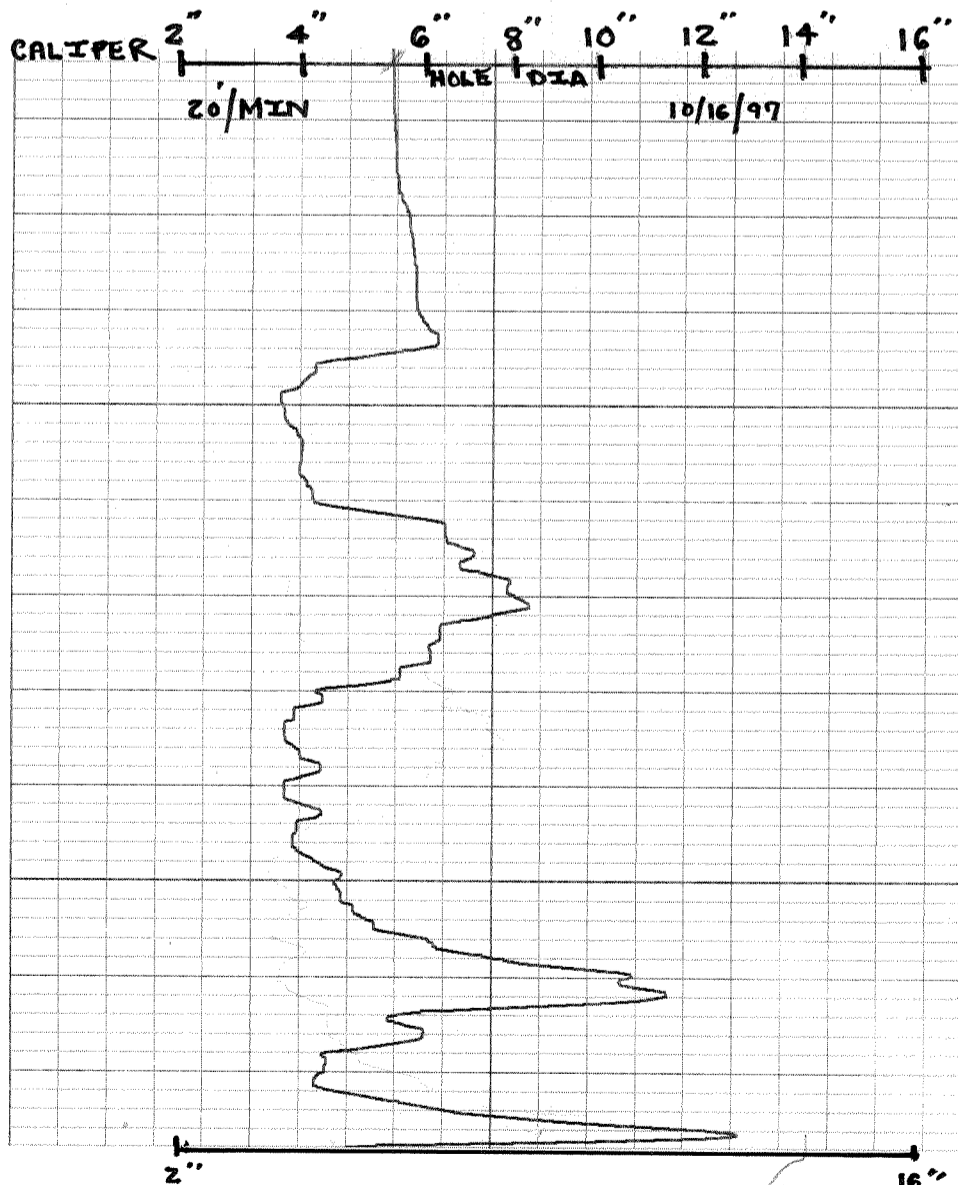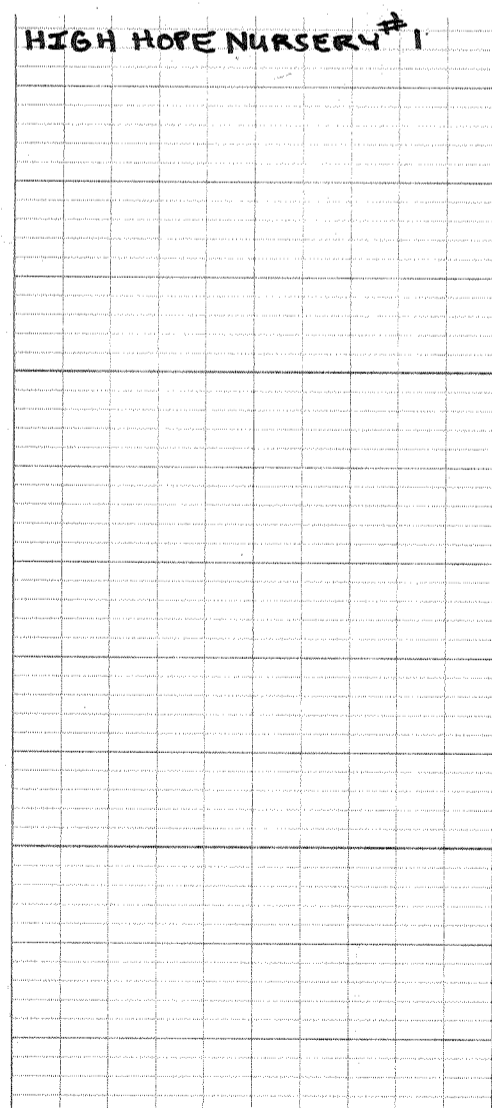



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000029
 Date 10/16/97 Well No. HIGH HOPE NURSERY #1
 Latitude 25 28 25 Longitude 80 22 12 X=707843 Y=414852
 NW1/4 NE1/4 SW1/4 NE 1/4 Section 18 Township 57S Range 40E
 Owner U.S.C.S. Phone ?
 Driller J. TRINDLE Date Drilled 10/16/97

DATUM

LS. +4.00' T.O.C. LS.

FLUID QUALITY

Date NA Time NA Source of Sample NA
 CI NA mg/l Type of Fluid WATER
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 102' T. Depth-Logger 64'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 4" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 64' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

PARTIAL LOGS DUE TO CAVING BOREHOLE.

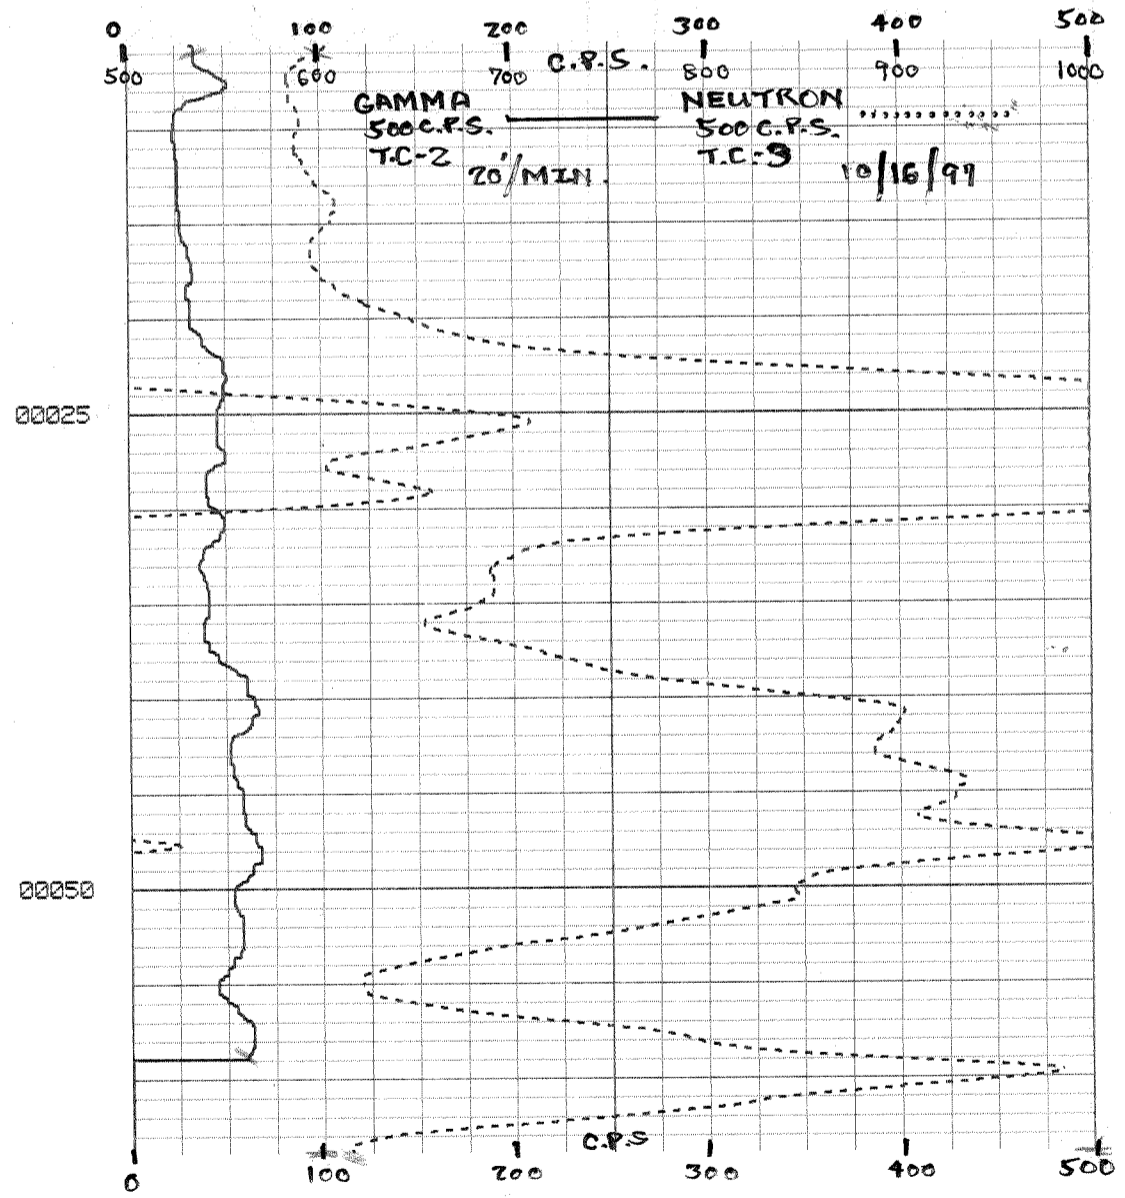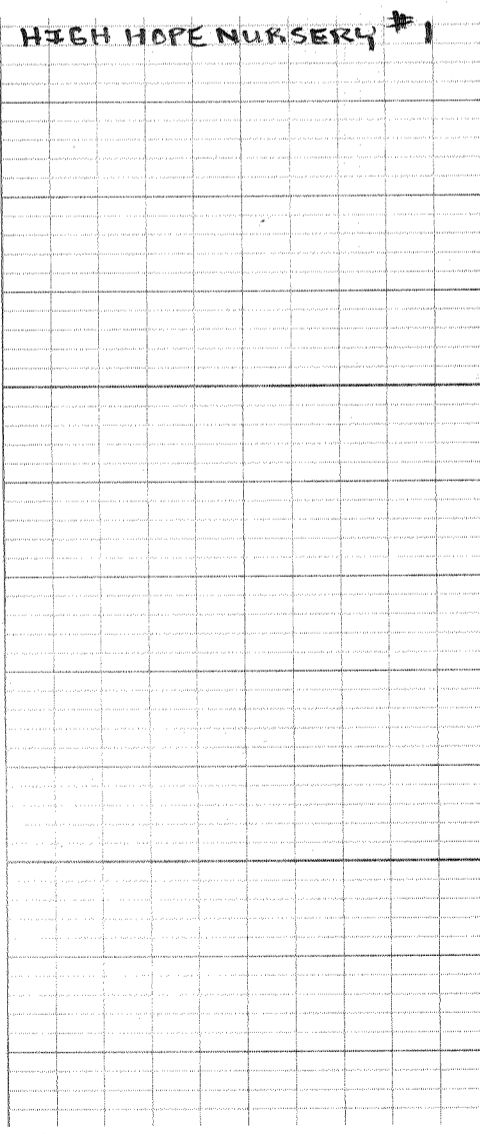



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County DADE
 Station I.D. 0250000029
 Date 10/16/97 Well No. HIGH HOPE NURSERY #1
 Latitude 25 28 25 Longitude 80 22 12 X=707843 Y=414852
NW1/4 NE1/4 SW1/4 NE 1/4 Section 18 Township 57S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled 10/16/97

DATUM

L.S. +4.00' T.O.C. L.S.

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid WATER
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 102' T. Depth-Logger 64'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 4" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 64' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

PARTIAL LOGS DUE TO CAVING BOREHOLE.

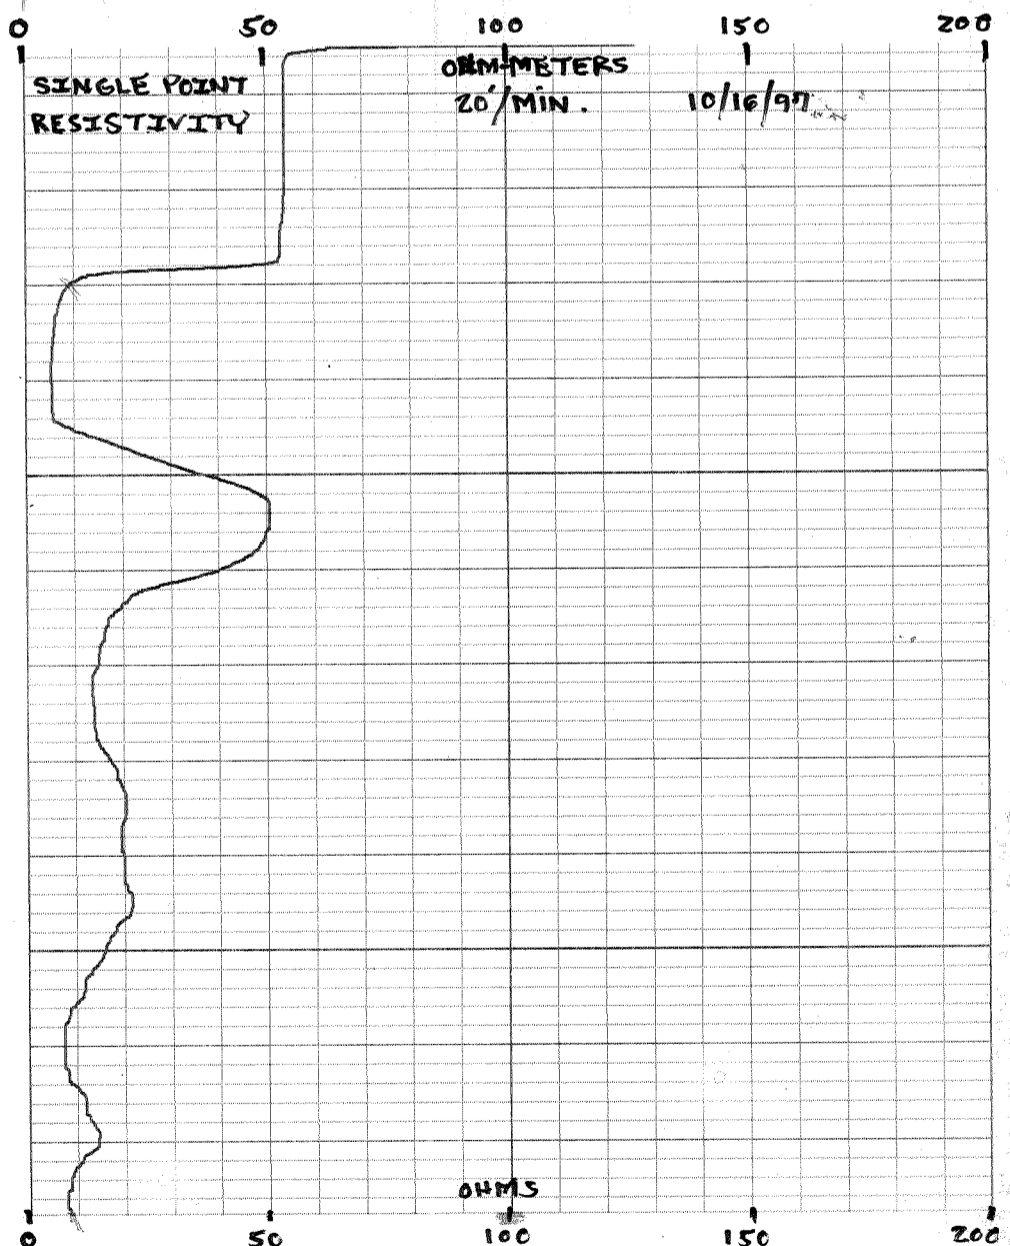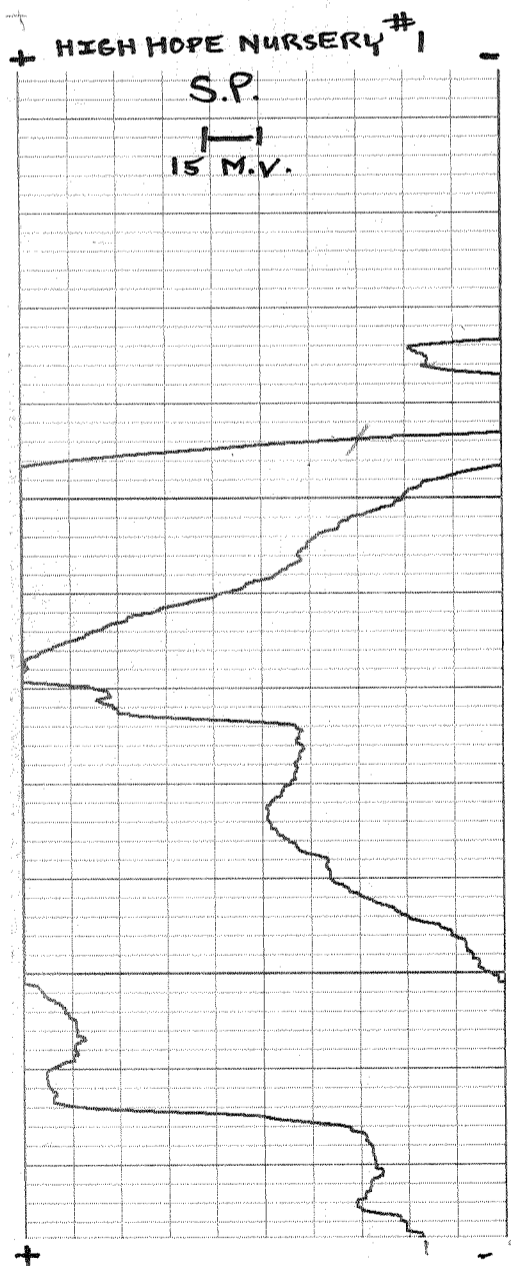



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County DADE
 Station I.D. 025000029
 Date 10/16/97 Well No. HIGH HOPE NURSERY #1
 Latitude 25 28 25 Longitude 80 22 12 X=707843 Y=414852
NW1/4 NE1/4 SW1/4 NE1/4 Section 18 Township 57S Range 40E
 Owner U.S.G.S. Phone ?
 Driller J. TRINDLE Date Drilled 10/16/97

DATUM

L.S. +4.00' T.O.C. L.S.

FLUID QUALITY

Date NA Time NA Source of Sample NA
 CI NA mg/l Type of Fluid WATER
 Temp. NA o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: E.P. DAUENHAUER Witnessed By: J. TRINDLE
 Scale NA
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. Air CT Auger Other WIRE LINE CORE
 T. Depth-Driller 102' T. Depth-Logger 64'
 Casing Depth Driller 20' Casing Depth Logger 20'
 Bit Size 4" Casing Dia. I.D. 6"
 Hole Dia. 4" From 20' To 64' Dia. NA From NA To NA
 Type of Casing STEEL Casing Thickness .375
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' Density
 Caliper ccl
 Flow meter Fluid Sampler
 16", 64" normals Temperature
 Neutron Delta Temp.
 Natural Gamma SP
 Fluid Resistivity Single Pt.

COMMENTS

PARTIAL LOGS DUE TO CAVING BOREHOLE.

