



ATI DRILLING

Las Palmas G-4

WELL CLUSTER
CP02-85SMA-CB-0091


Lithology

Land surface - 56'
56' to 100'

Limestone
Grey Silty Fine Sand

Construction

Drilling method: Rotary
Borehole diameter: 8"

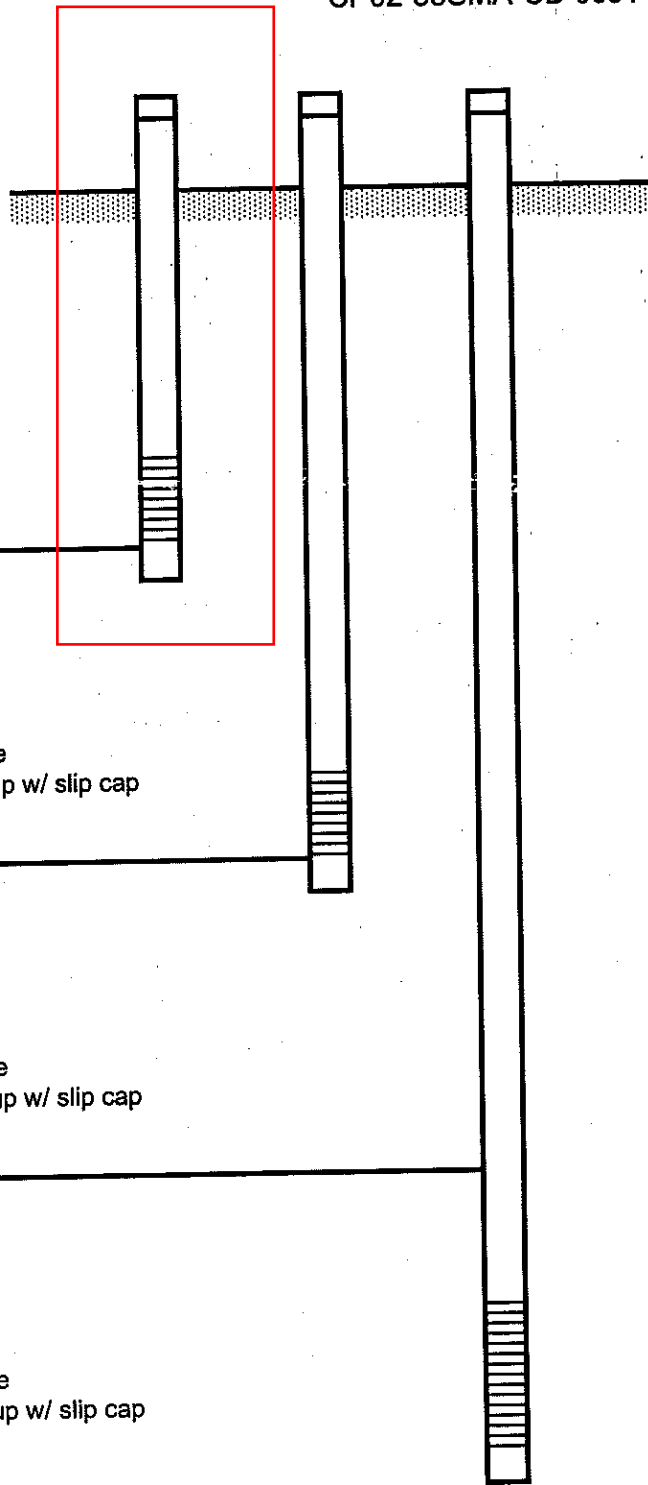

CP02-85SMA-MW-0017

drilled 10/19/02
depth 20'
5' of 0.010 slotted screen w/ 6" sump
4" pvc schedule 40
20/30 filter pack: 20' - 13' bls
bentonite chip: 13' - 12' bls
Portland cement: 12' bls to land surface
wellhead completion: 2' unprotected stick-up w/ slip cap

CP02-85SMA-MW-0018

drilled 10/19/02
depth 44'
5' of 0.010 slotted screen w/ 6" sump
4" pvc schedule 40
20/30 filter pack: 44' - 37' bls
bentonite chip: 37' - 36' bls
Portland cement: 36' bls to land surface
wellhead completion: 2' unprotected stick-up w/ slip cap

CP02-85SMA-MW-0016

drilled 10/19/02
depth 101'
10' of 0.010 slotted screen w/ 6" sump
4" pvc schedule 40
20/30 filter pack: 101' - 88' bls
bentonite chip: 88' - 87' bls
Portland cement: 87' bls to land surface
wellhead completion: 2' unprotected stick-up w/ slip cap