



# ATI DRILLING

Las Palmas G-5

**WELL CLUSTER**  
CP02-85SMA-CB-0089


### Lithology

Land surface - 52'  
52' to 100'

Limestone  
Grey Silty Fine Sand

### Construction

Drilling method: Rotary  
Borehole diameter: 8"

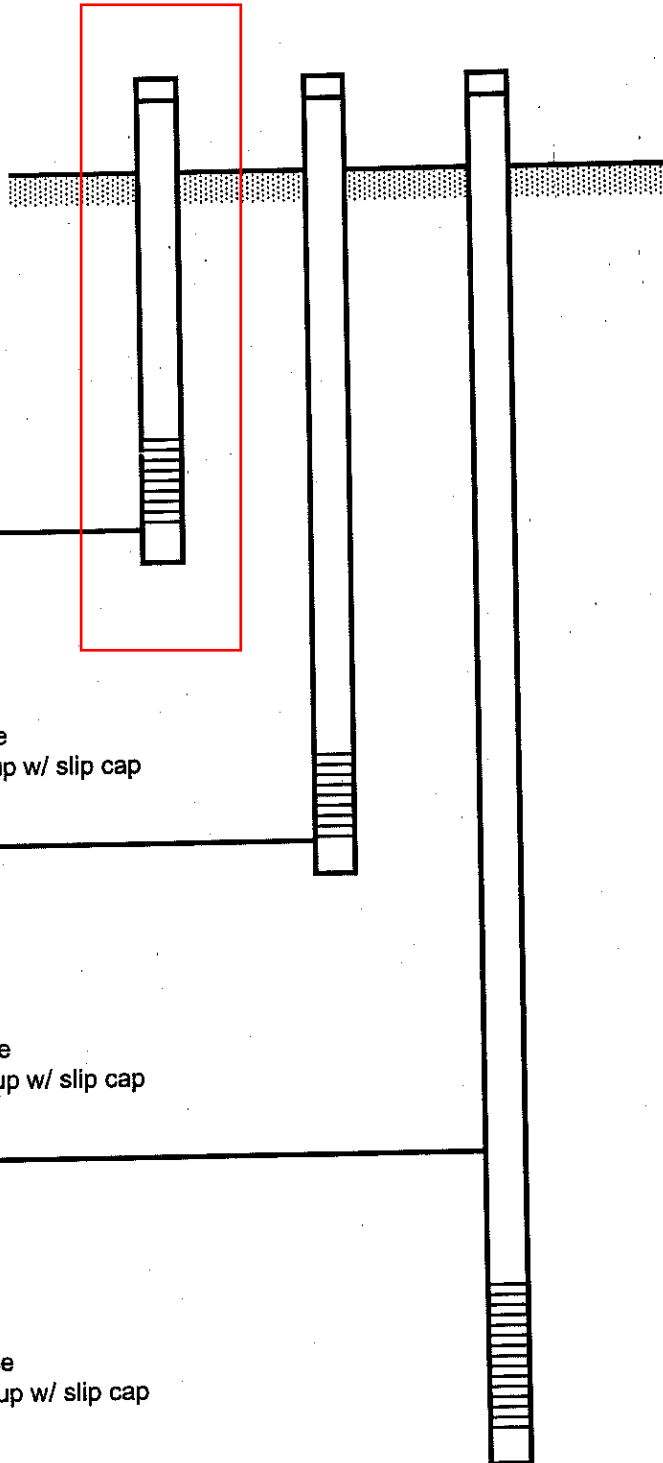

#### CP02-85SMA-MW-0010

drilled 10/12/02  
depth 20'  
5' of 0.010 slotted screen w/ 6" sump  
4" pvc schedule 40  
20/30 filter pack: 20' - 13' bls  
bentonite chip: 13' - 12' bls  
Portland cement: 12' bls to land surface  
wellhead completion: 2' unprotected stick-up w/ slip cap

#### CP02-85SMA-MW-0012

drilled 10/12/02  
depth 46'  
5' of 0.010 slotted screen w/ 6" sump  
4" pvc schedule 40  
20/30 filter pack: 46' - 38' bls  
bentonite chip: 38' - 37' bls  
Portland cement: 37' bls to land surface  
wellhead completion: 2' unprotected stick-up w/ slip cap

#### CP02-85SMA-MW-0011

drilled 10/12/02  
depth 100'  
10' of 0.010 slotted screen w/ 6" sump  
4" pvc schedule 40  
20/30 filter pack: 100' - 88' bls  
bentonite chip: 88' - 87' bls  
Portland cement: 87' bls to land surface  
wellhead completion: 2' unprotected stick-up w/ slip cap