



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION
 County: PALM BEACH
 Station I.D. 099000050
 Date 08/13/96 Well No. PBF-6
 Latitude 26 40 32.72 Longitude 80 06 11.14
 SE 1/4 NW 1/4 NW 1/4 Section 06 Township 44S Range 43E
 Owner S.F.W.M.D. Phone (561)686-8800
 Driller R.T.S. Date Drilled NONE

DATUM
 L.S. +17.00' T.O.C. NA




FLUID QUALITY
 Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. 72.2 F a/C Field Density NA @ a/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: DAUENHAUER/DEMOKS Witnessed By: DEMONSTRANT/DAUENHAUER
 Scale * F.R. = 10 OHMS / 71 to 73 F / 10 M / T Units
 Digitized By: NA

WELL CONSTRUCTION
 Drilling Method: Rot.(X) Air(X) CI() Auger() Other
 T. Depth-Driller 1520' T. Depth-Logger 1520'
 Casing Depth Driller 1385' Casing Depth Logger 1385'
 Bit Size NA Casing Dia. I.D. 11.97"
 Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
 Type of Casing STEEL Casing Thickness 0.03"
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow 600 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6'	(X)(2)	Density	()
Caliper	(X)(2)	cat	()
Flow meter	(X)	Fluid Sampler	()
16".64" normals	(X)(2)	Temperature	(X) 2
Neutron	(X)	Delta Temp.	(X) 2
Natural Gamma	(X)	SP	(X)
Fluid Resistivity	(X) 2	Single PL	(X)

COMMENTS
 NO COMMENTS

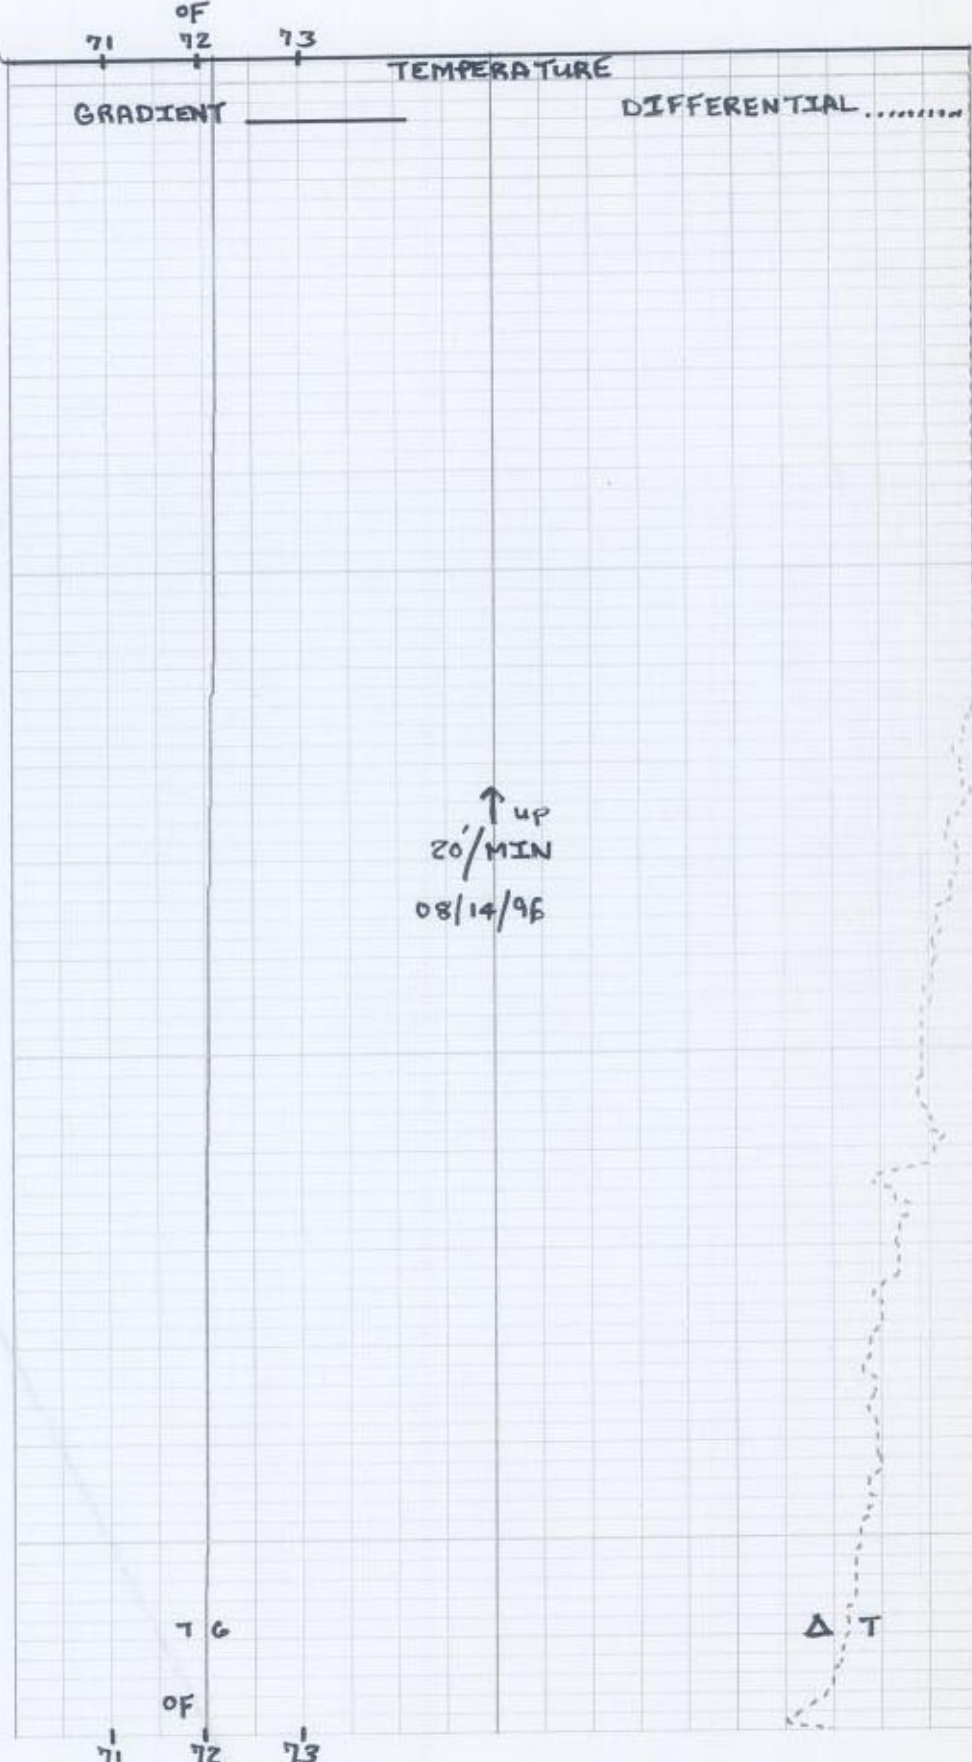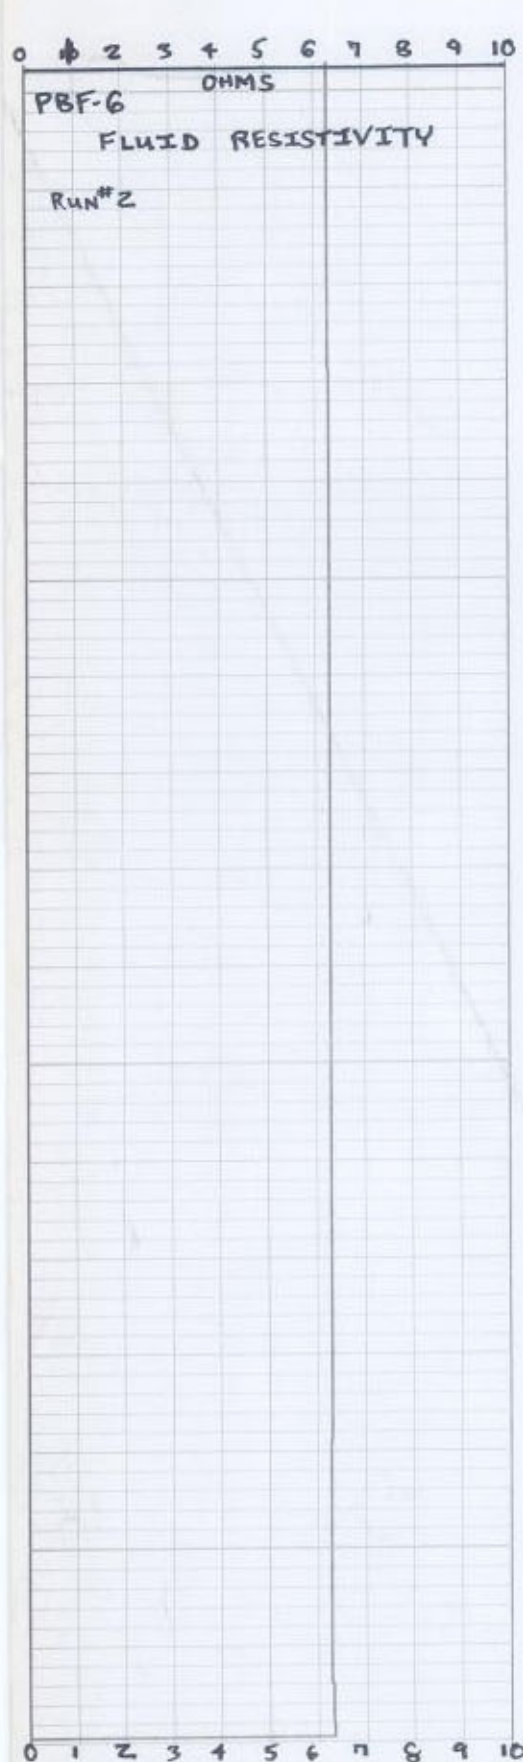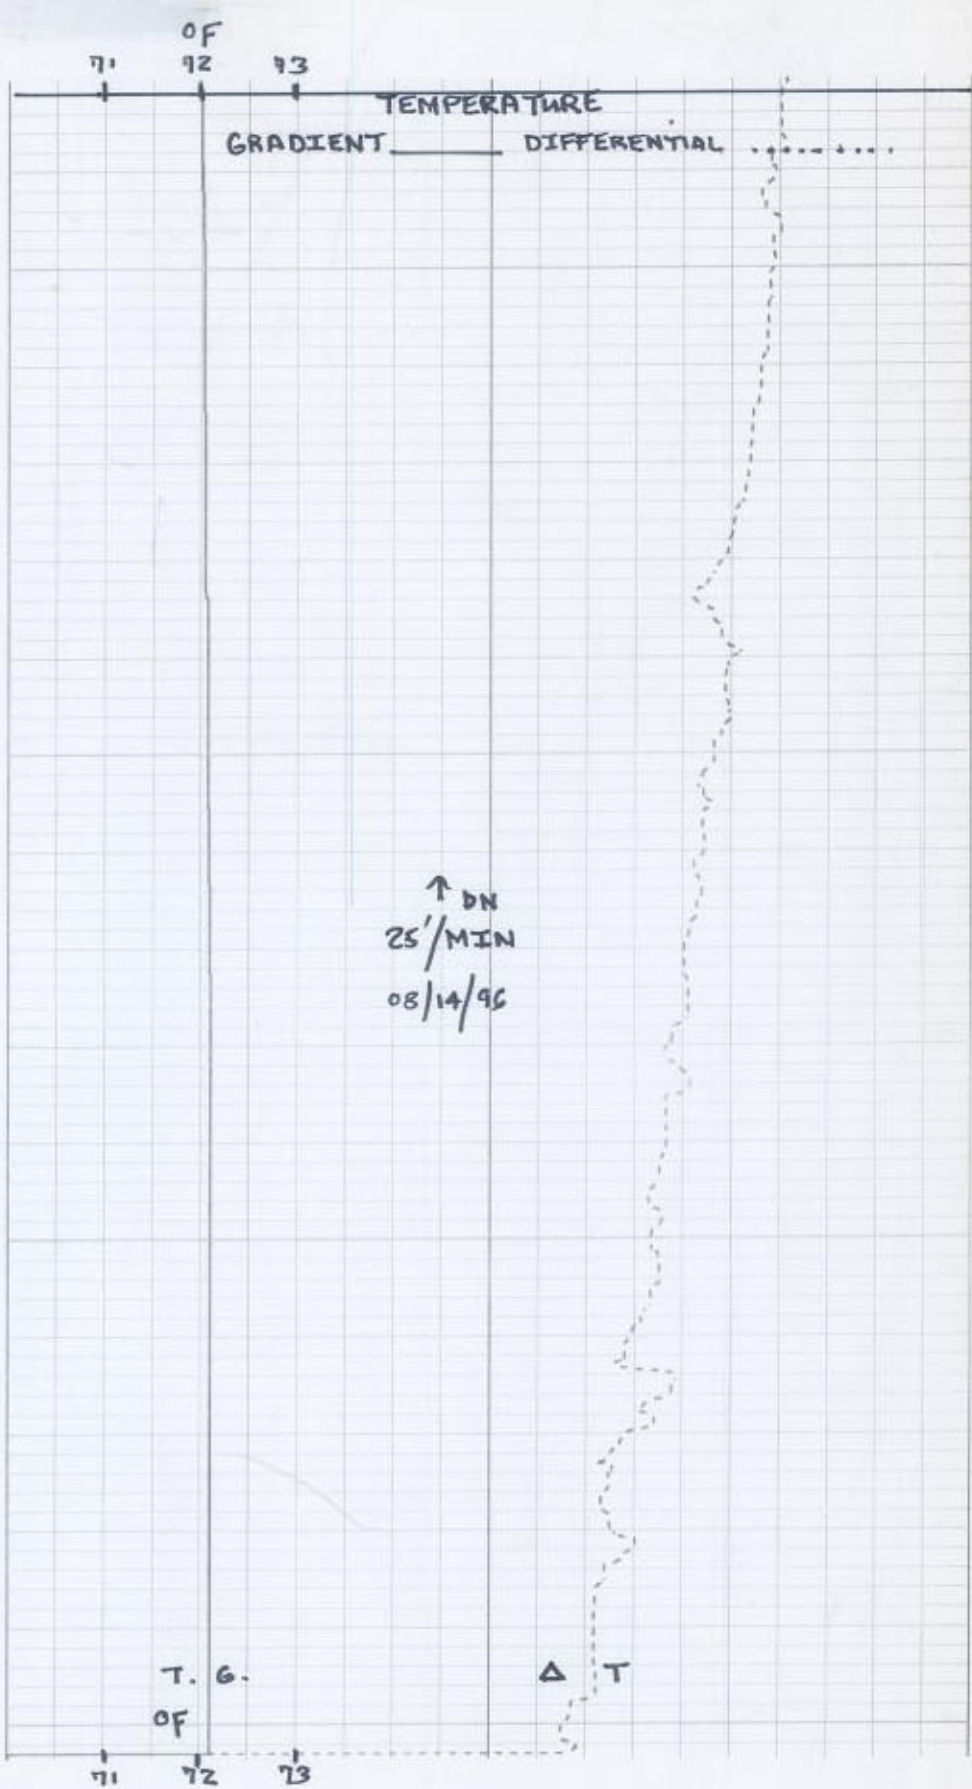



SOUTH FLORIDA WATER MANAGEMENT DISTRICT

WELL LOG

WELL LOCATION

County: PALM BEACH
 Station ID: 999000000
 Date: 06/13/96 Well No: PBF-6
 Latitude: 26 50 32.72 Longitude: 80 06 11.14
 SE 1/4 NW 1/4 NW 1/4 NW 1/4 Section 06 Township 44S Range 43C
 Owner: S.F.W.M.D. Phone: (561)586-8800
 Driller: R.T.S. Date Drilled: NONE

DATUM

L.S. +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 QUA mg/l Type of Fluid NA
 Temp. 72.2 F a/c Field Density NA g/c
 T.D.S. NA mg/l Spec. Cond. NA umho/cm

Logged By: DAUENHAUER/DEMONT/DAUENHAUER
 Scale: 100 C.P.S. T.C. = 2 / Stop Flow Checks 50 C.P.S.
 Digitized By: NA

WELL CONSTRUCTION







Drilling Method: Rot (X) Air (X) C () Auger () Other
 T. Depth-Driller 1520' T. Depth-Logger 1520'
 Casing Depth-Driller 1385' Casing Depth-Logger 1385'
 BH Size NA Casing Dia. I.D. 11.97"
 Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
 Type of Casing STEEL Casing Thickness 0.03"
 Type of Screen STEEL Screen Int. From NA To NA
 Yield Flow 600 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6' () (2) Density ()
 Caliper () (2) cat ()
 Flow meter () (2) Fluid Sampler ()
 16" 64" normal () (2) Temperature ()
 Neutron () Data Temp. ()
 Nuclear Gamma () SP ()
 Fluid Resistivity () Single PL ()

COMMENTS

NO COMMENTS

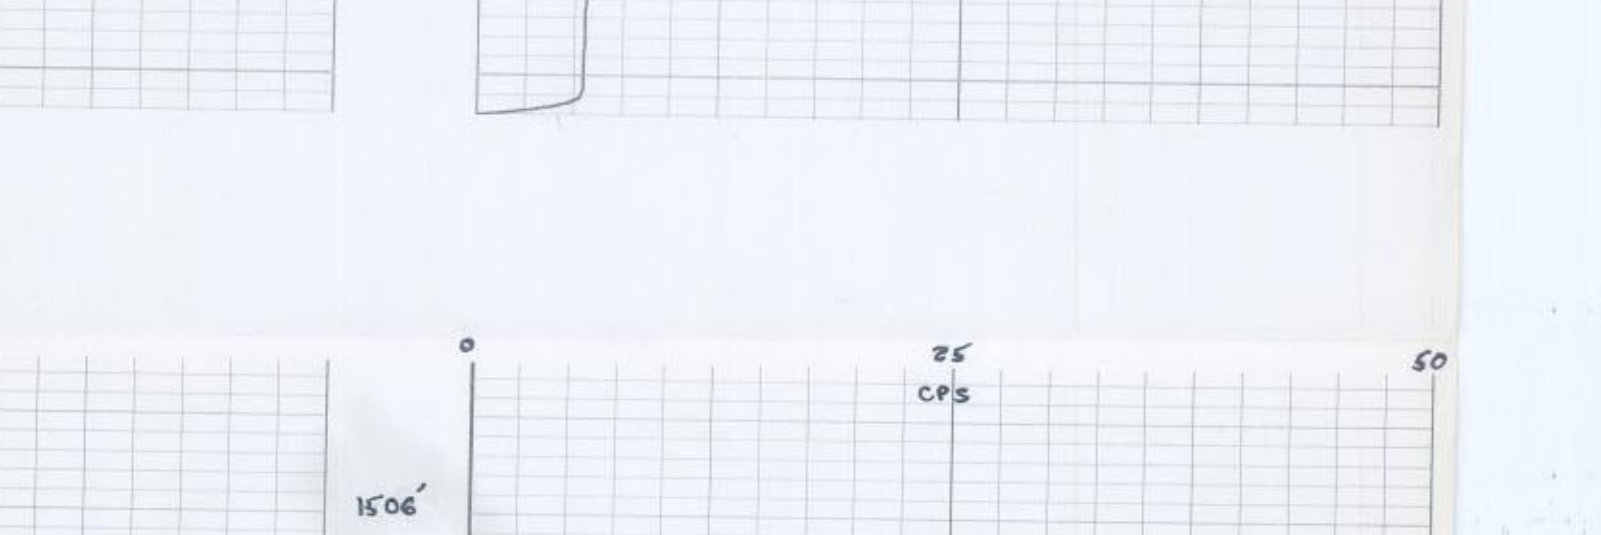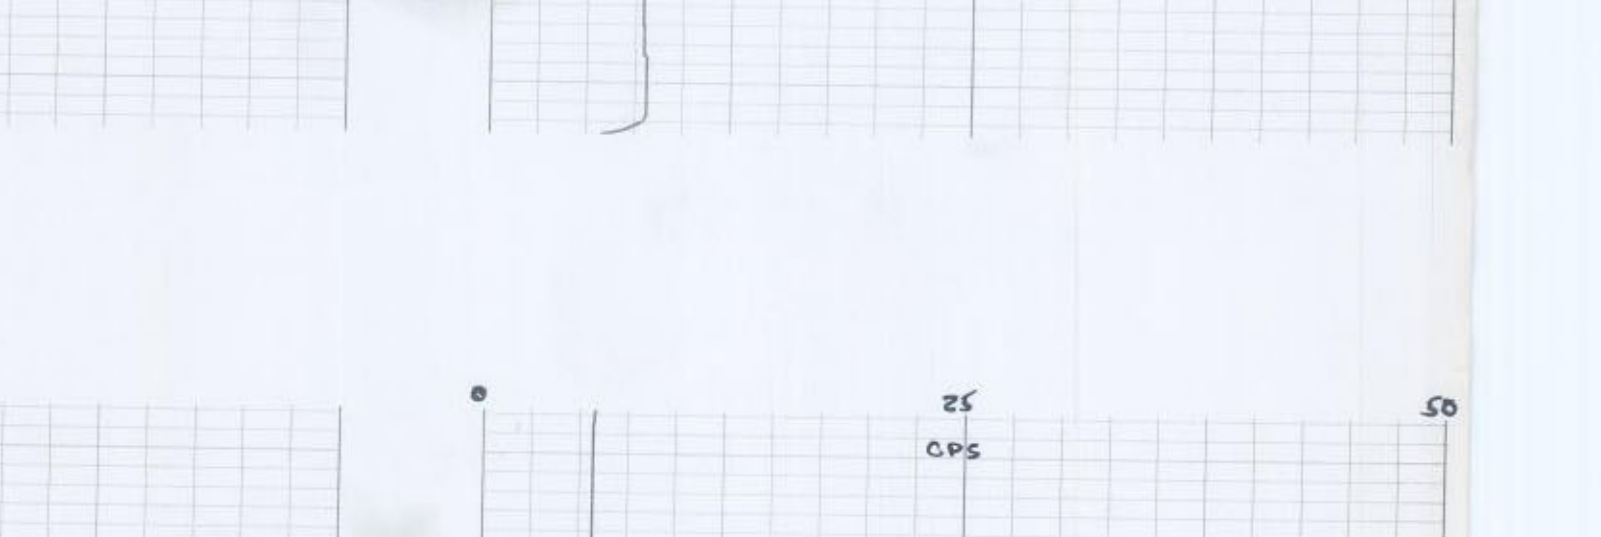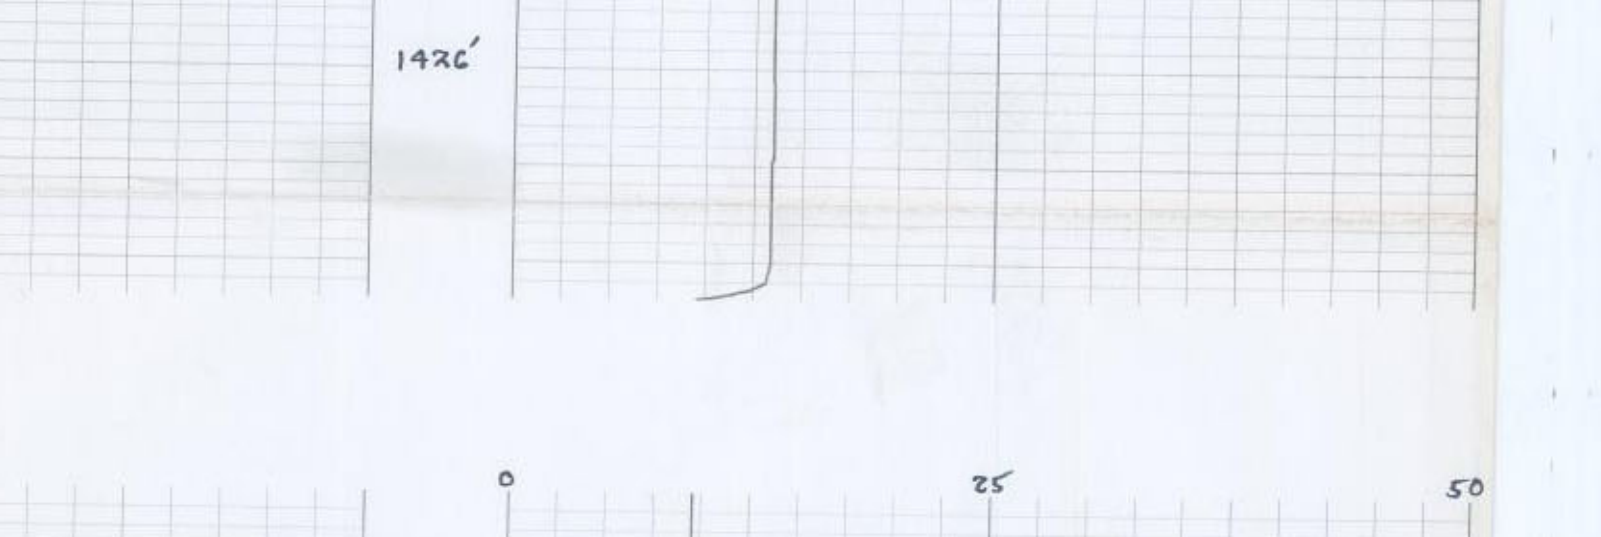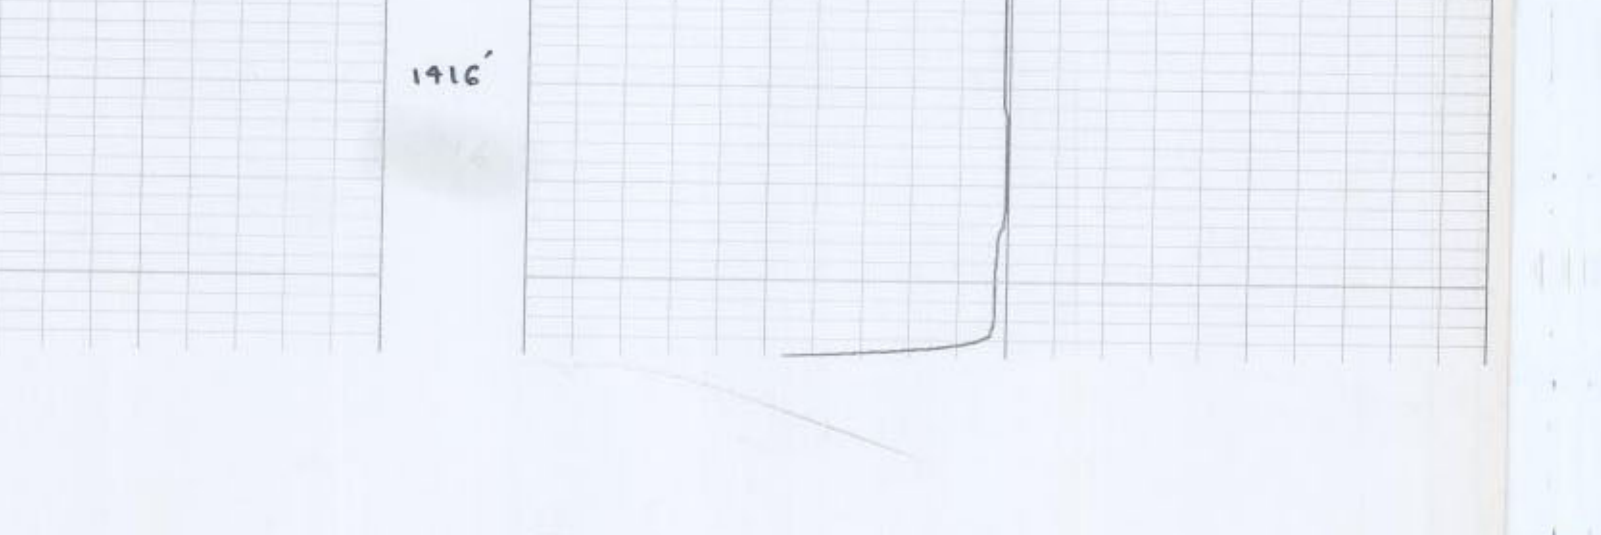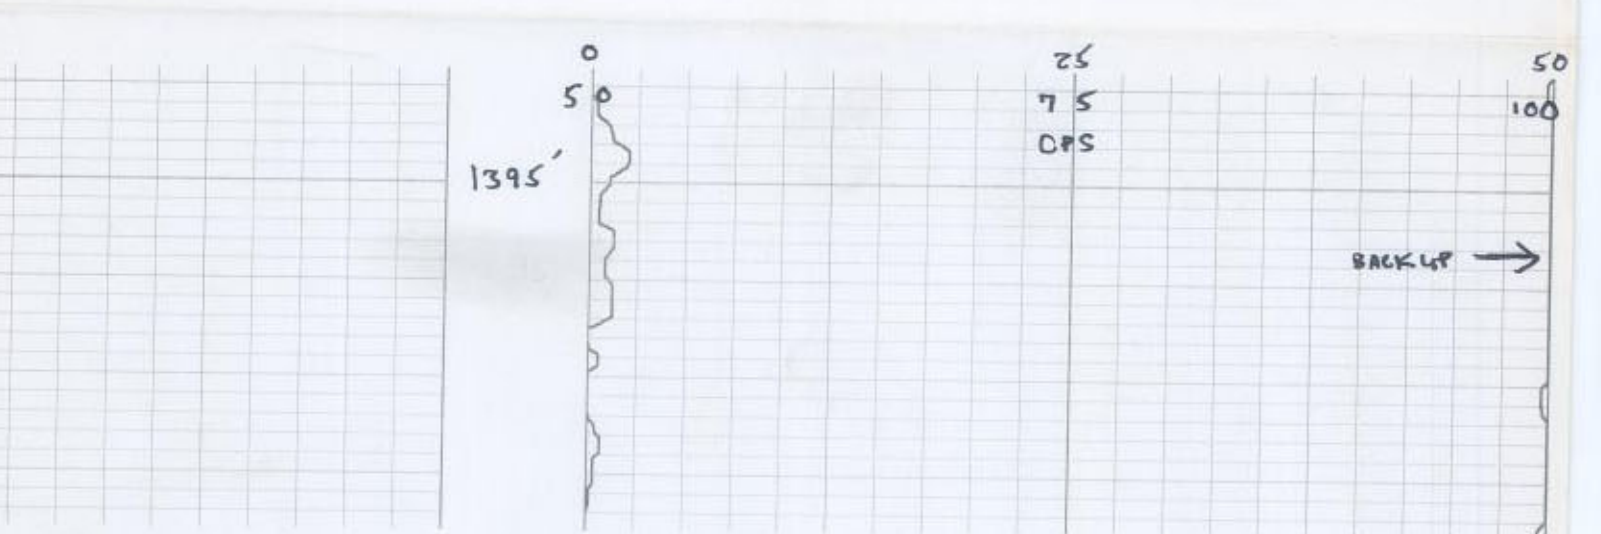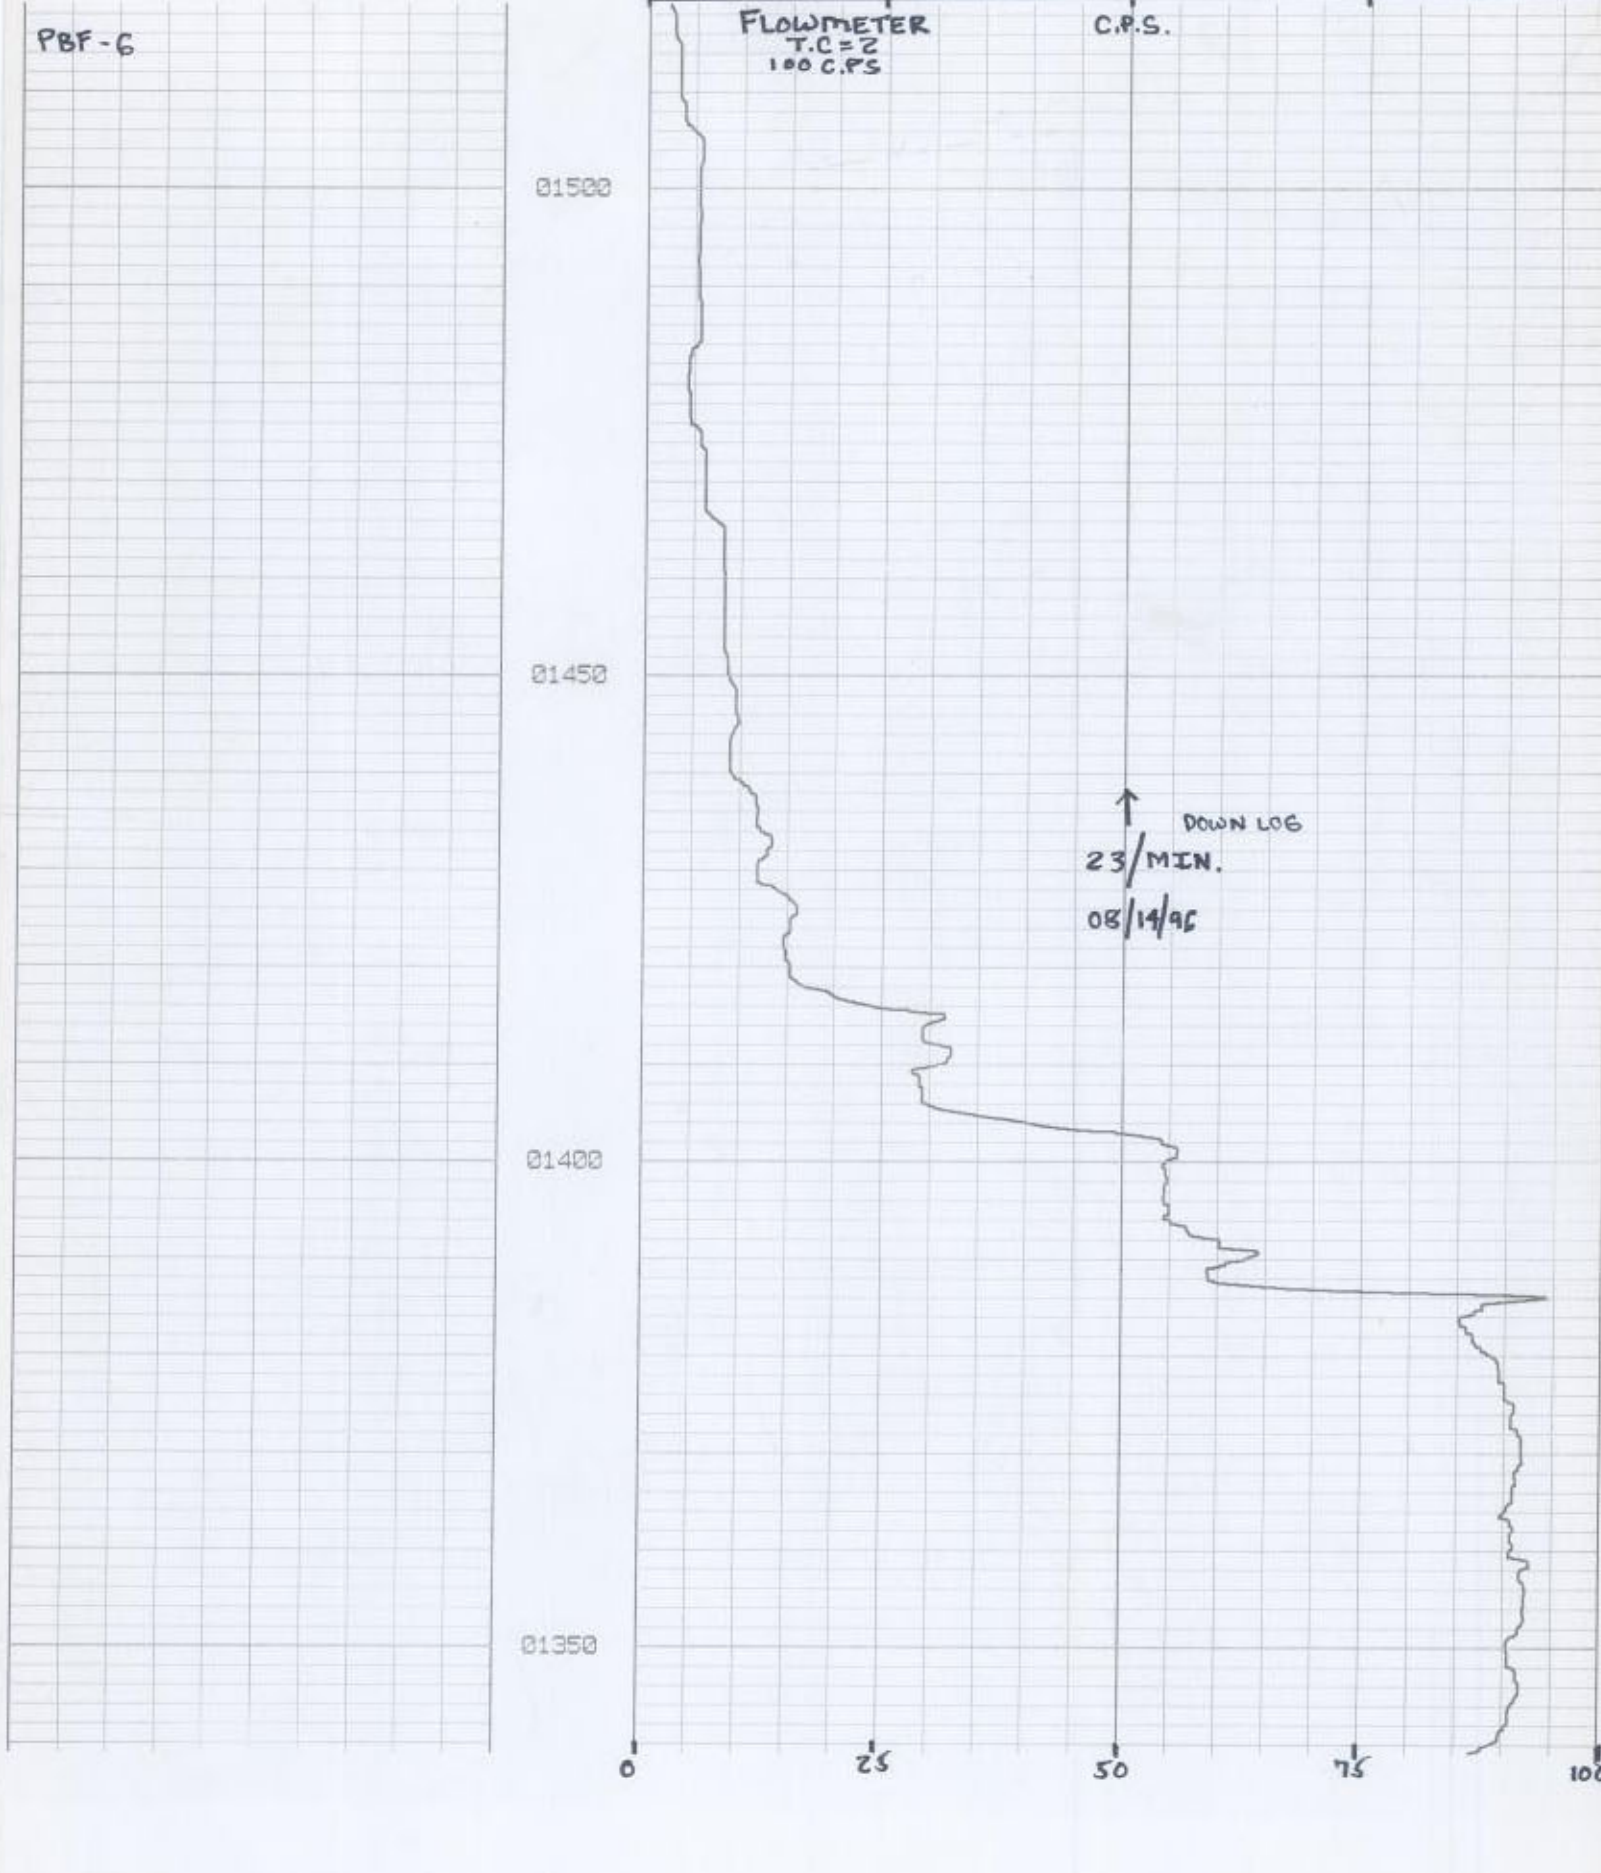



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station ID: 099000000
 Date 09/13/96 Well No. PBF-6
 Latitude 26 30 32.72 Longitude 80 06 11.14
 SEC 14 NW/4 NW/4 NW/4 Section 06 Township 44S Range 43E
 Owner S.F.W.M.D. Phone (561)988-8800
 Driller R.T.S. Date Drilled NONE

DATUM

LS +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 D.N.A. mg/l Type of Fluid NA
 Temp. 72.2 F 1/2 C Field Density NA g/cm³
 T.D.S.N.A. mg/l Spec. Cond. NA umho/cm
 Logged By: DAUENHAUER/SCHEFFNER/DAUENHAUER
 Soils: ~~ARMA T.C.2~~ / NEUTRON T.C.3 (500 C.P.S.)
 Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. () Auger () Other
 T. Depth-Driller 1520' T. Depth-Logger 1520'
 Casing Depth Driller 1385' Casing Depth Logger 1385'
 BH Size NA Casing Dia. I.D. 11.93"
 Hole Dia. 17" From 0' to 300' Dia. 8" From 300' to 1520'
 Type of Casing STEEL Casing Thickness 0.01"
 Type of Screen OPEN HOLE Screen M.L. From NA To NA
 Yield Flow 600 GPM Well Use A.P.T.


TYPE OF SURVEYS RUN

Lateral # () Density ()
 Caliper () ()
 Flow meter () Fluid Sampler ()
 18" dia. normal () Temperature ()
 Neutron () Gamma ()
 Neutron Gamma () Delta Temp. ()
 Fluid Resistivity () SP ()
 Fluid Resistivity () Single PL ()

COMMENTS

NO COMMENTS

PBF-6





SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County PALM BEACH
Station I.D. 098000050
Date 08/13/96 Well No. PBF-6
Latitude 26 40 32.72 Longitude 80 06 11.14
SE 1/4 NW 1/4 NW 1/4 NW 1/4 Section 06 Township 44S Range 43E
Owner S.F.W.M.D. Phone (561)686-8800
Driller R.T.S. Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
Cl NA mg/l Type of Fluid NA
Temp. 72.2 F o/C Field Density NA o/C
T.D.S. NA mg/l Spec. Cond. NA umhos/cm

Logged By: DAUENHAUER/DEMONSTRANT/DAUENHAUER

Scale 2 to 20 INCHES

Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. (x) Air (x) CT () Auger () Other
T. Depth-Driller 1520' T. Depth-Logger 1520'
Casing Depth Driller 1385' Casing Depth Logger 1385'
Bit Size NA Casing Dia. I.D. 11.97"
Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
Type of Casing STEEL Casing Thickness 0.03"
Type of Screen OPEN HOLE Screen Int. From NA To NA
Yield Flow 600 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6'	(x)(2)	Density	()
Caliper	(x)(2)	ccf	()
Flow meter	(x)	Fluid Sampler	()
16", 64" normals	(x)(2)	Temperature	(x)
Neutron	(x)	Delta Temp.	(x)
Natural Gamma	(x)	SP	(x)
Fluid Resistivity	(x)	Single Pt.	(x)

COMMENTS

NO COMMENTS

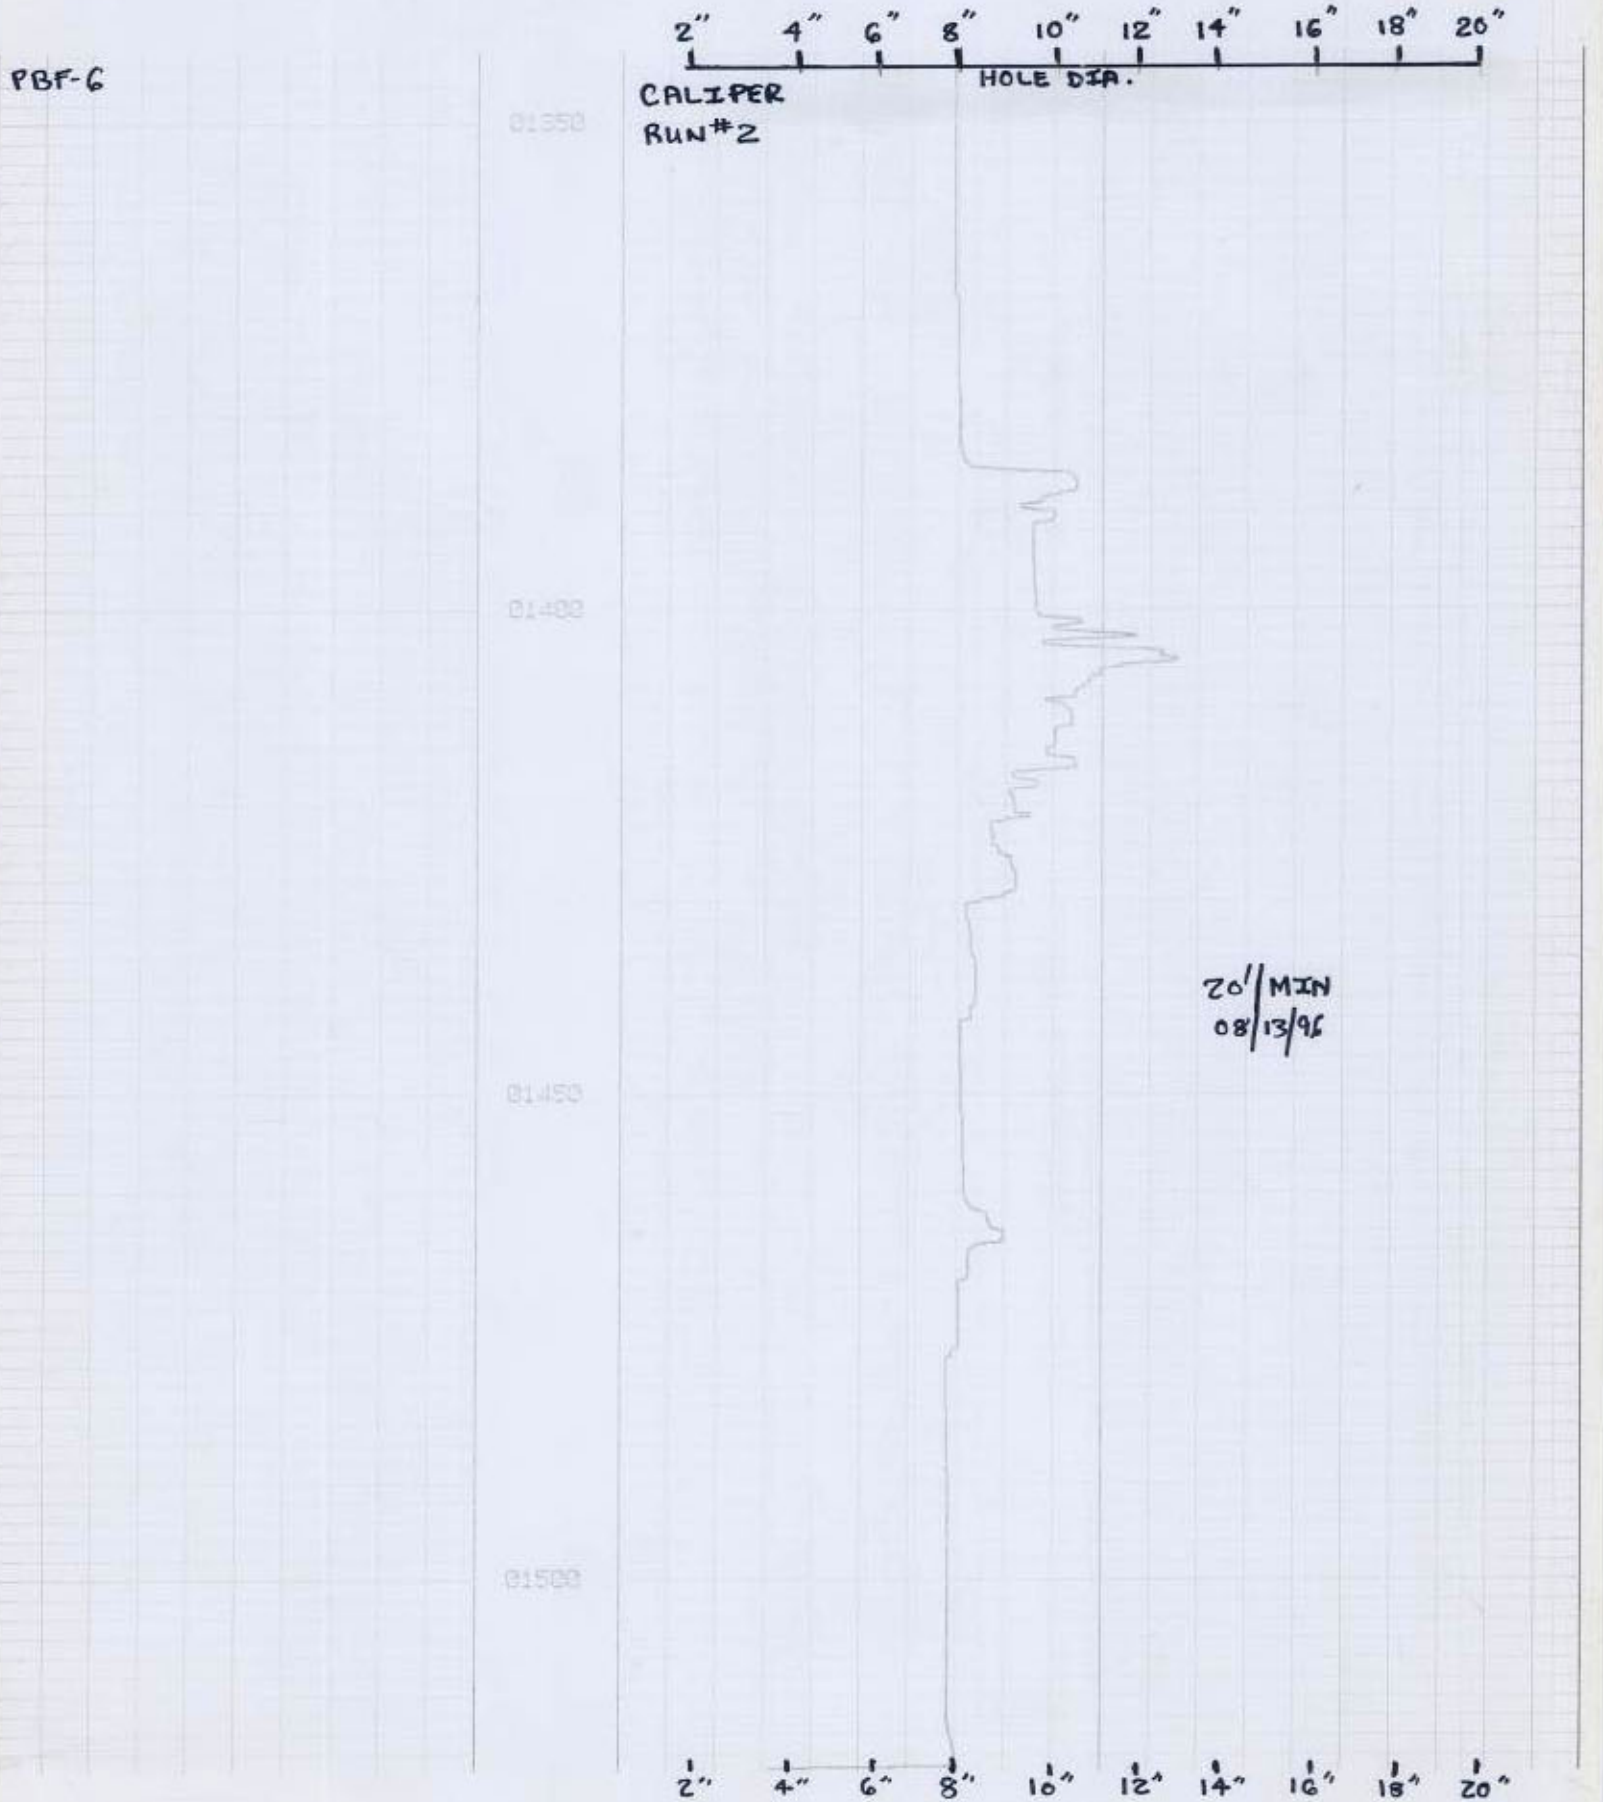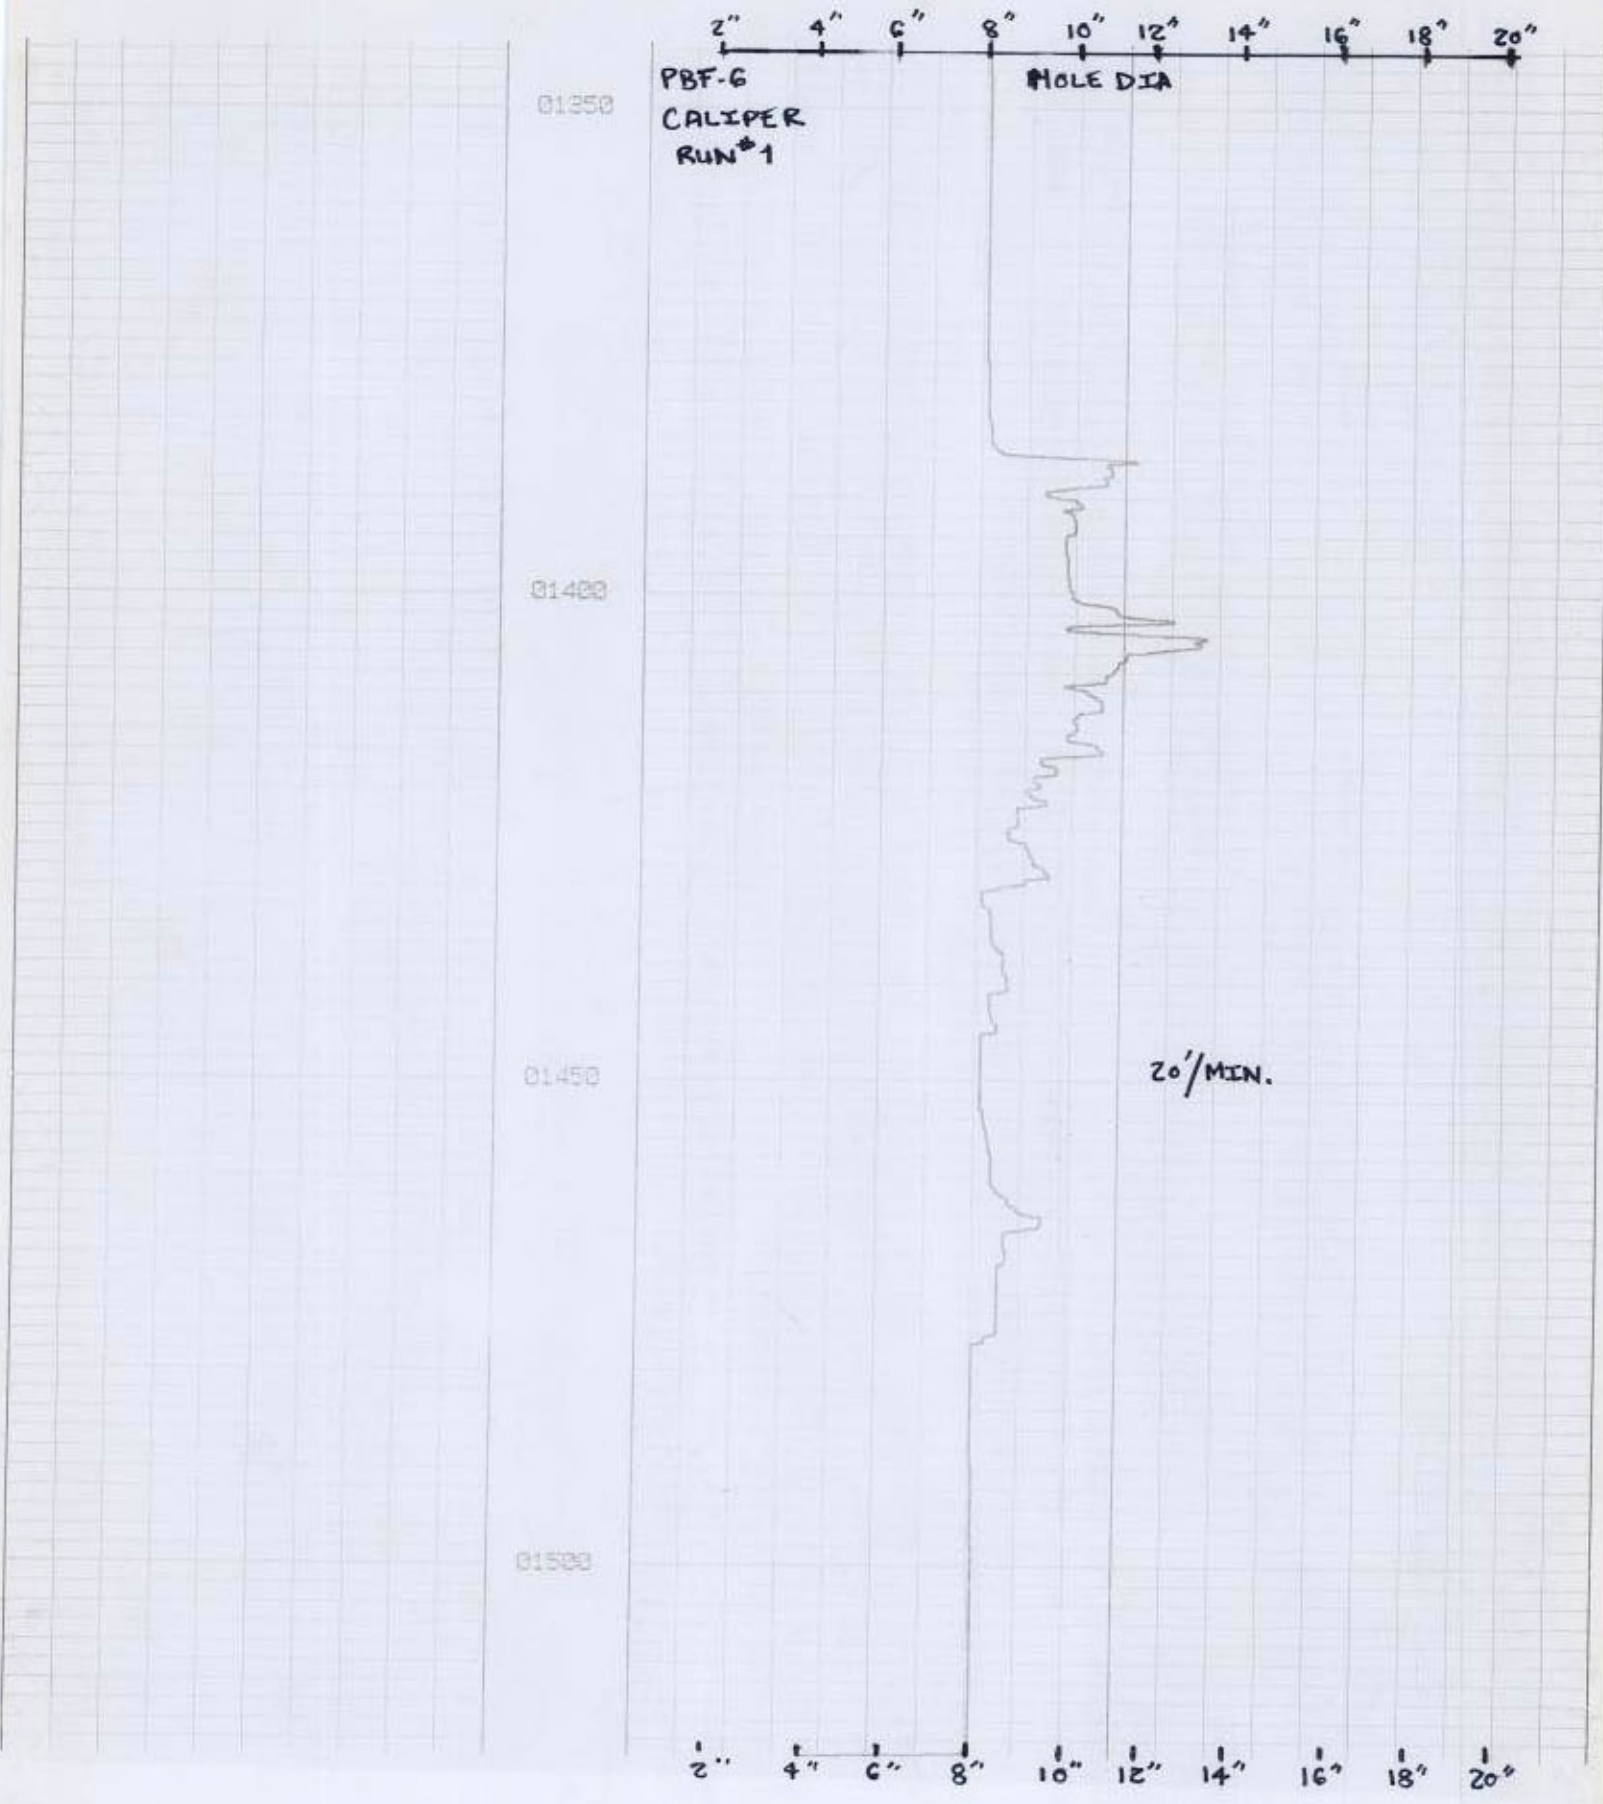



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station ID 092000050
 Date 08/13/96 Well No. PBF-6
 Latitude 26 40 32.72 Longitude 80 06 11.14
 SE 1/4 NW1/4 NW1/4 Section 06 Township 44S Range 43E
 Owner S.F.W.M.D. Phone (561)686-8800
 Driller R.T.S. Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. 72.2 F o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm
 Logged By: DAUENHAUER/DEMONTWAIN Used By: DEMONSTRANT/DAUENHAUER
 Scale 40 OHM-METERS
 Digitized By: NA





WELL CONSTRUCTION

Drilling Method: Rot. Air CI Auger Other
 T. Depth-Driller 1520' T. Depth-Logger 1520'
 Casing Depth Driller 1385' Casing Depth Logger 1385'
 Bit Size NA Casing Dia. I.D. 11.97"
 Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
 Type of Casing STEEL Casing Thickness 0.03"
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow 600 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6' (X) (2) Density ()
 Colper (X) (2) ccl ()
 Flow meter (X) Fluid Sampler ()
 16", 64" normals (X) (2) Temperature (X)
 Neutron (X) Delta Temp. (X)
 Natural Gamma (X) SP
 Fluid Resistivity (X) Single Pt. (X)

COMMENTS NO COMMENTS

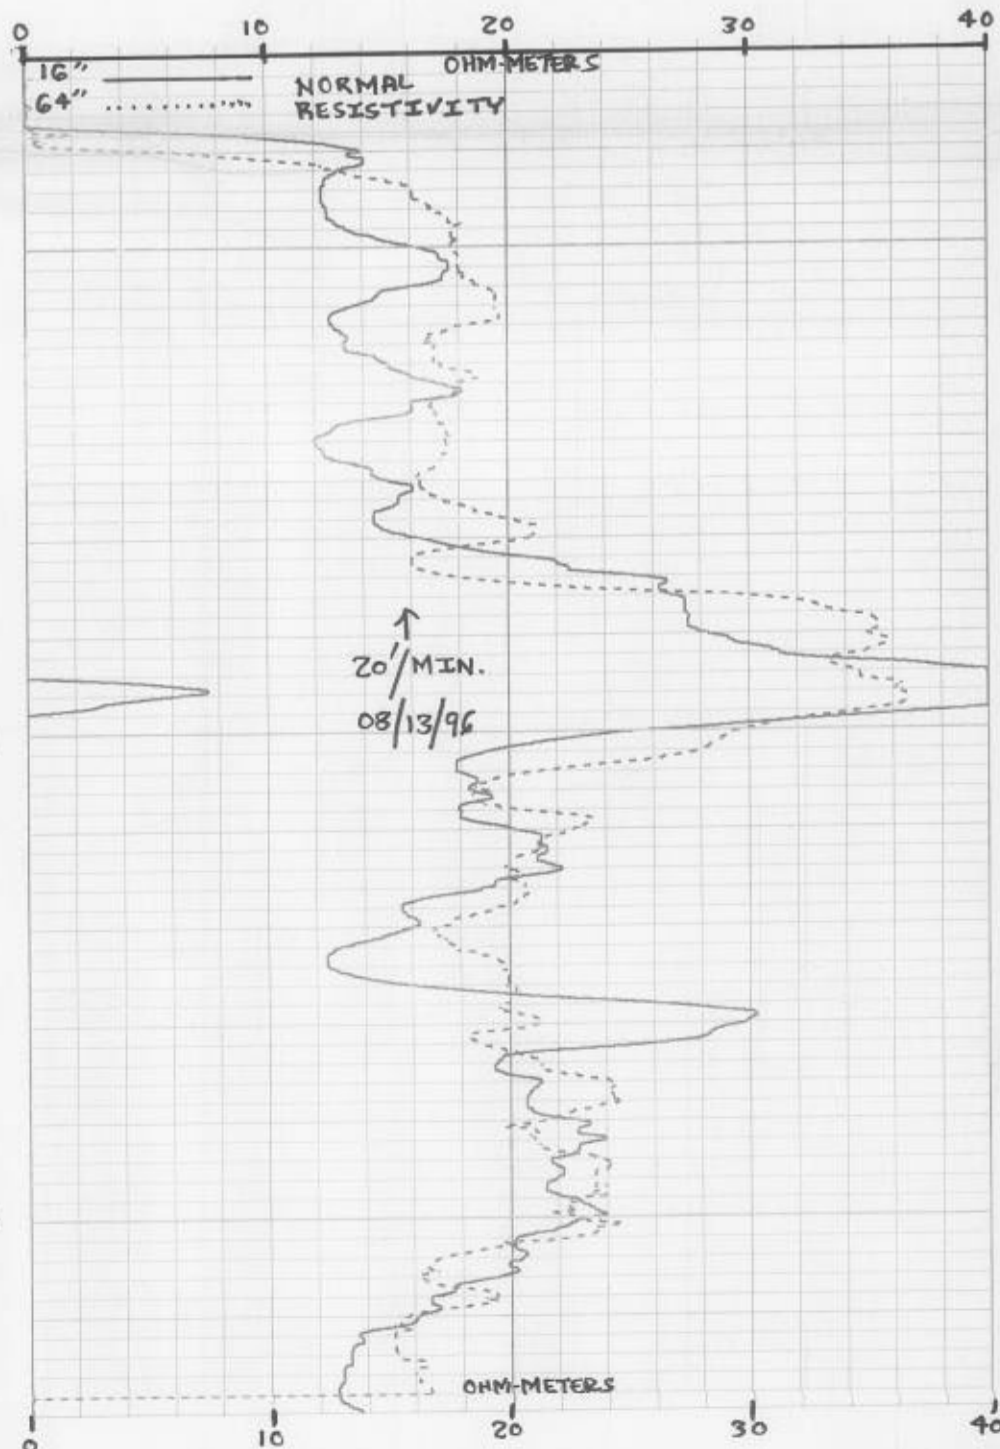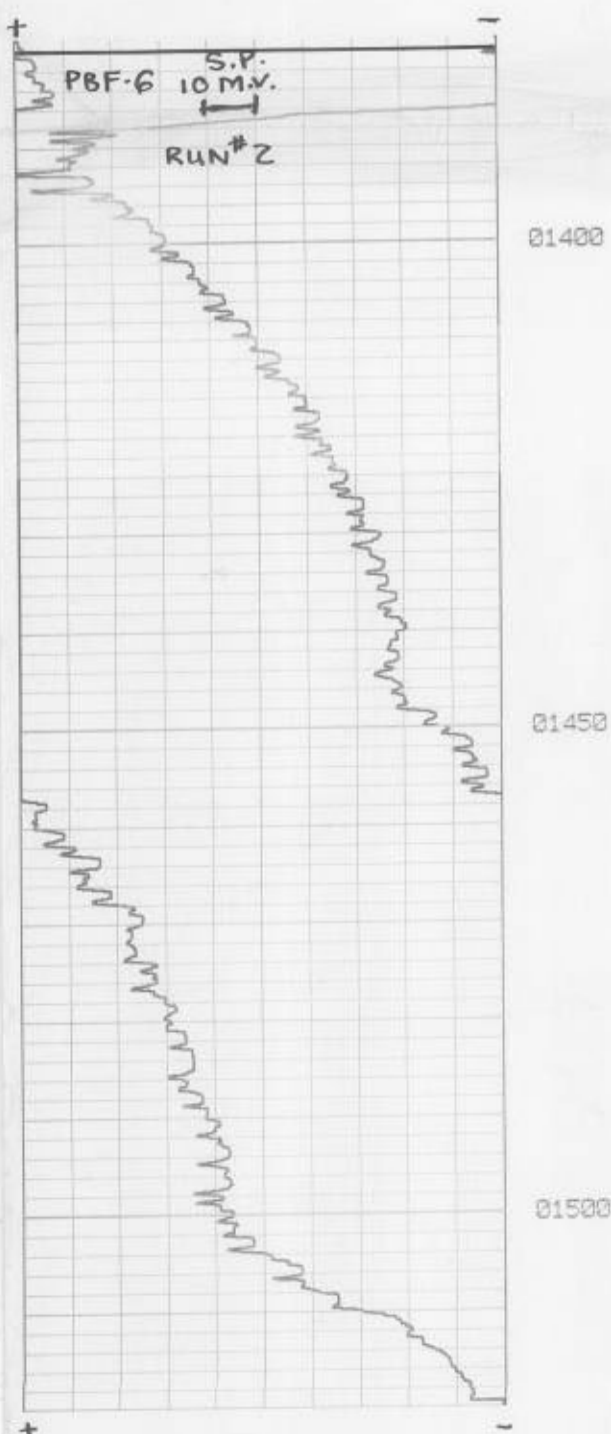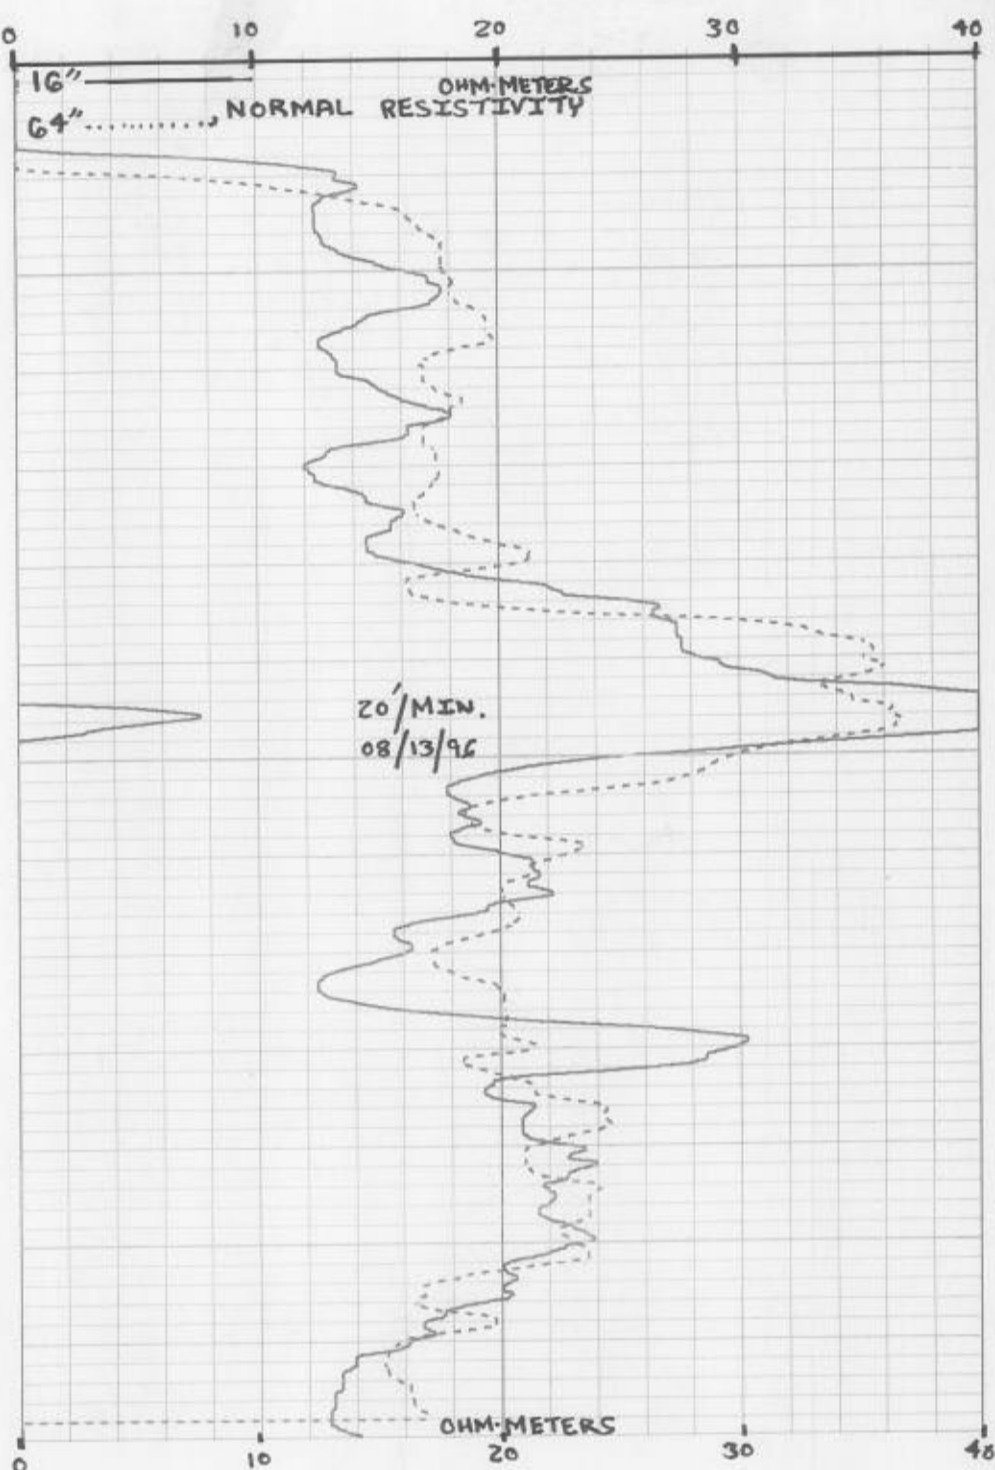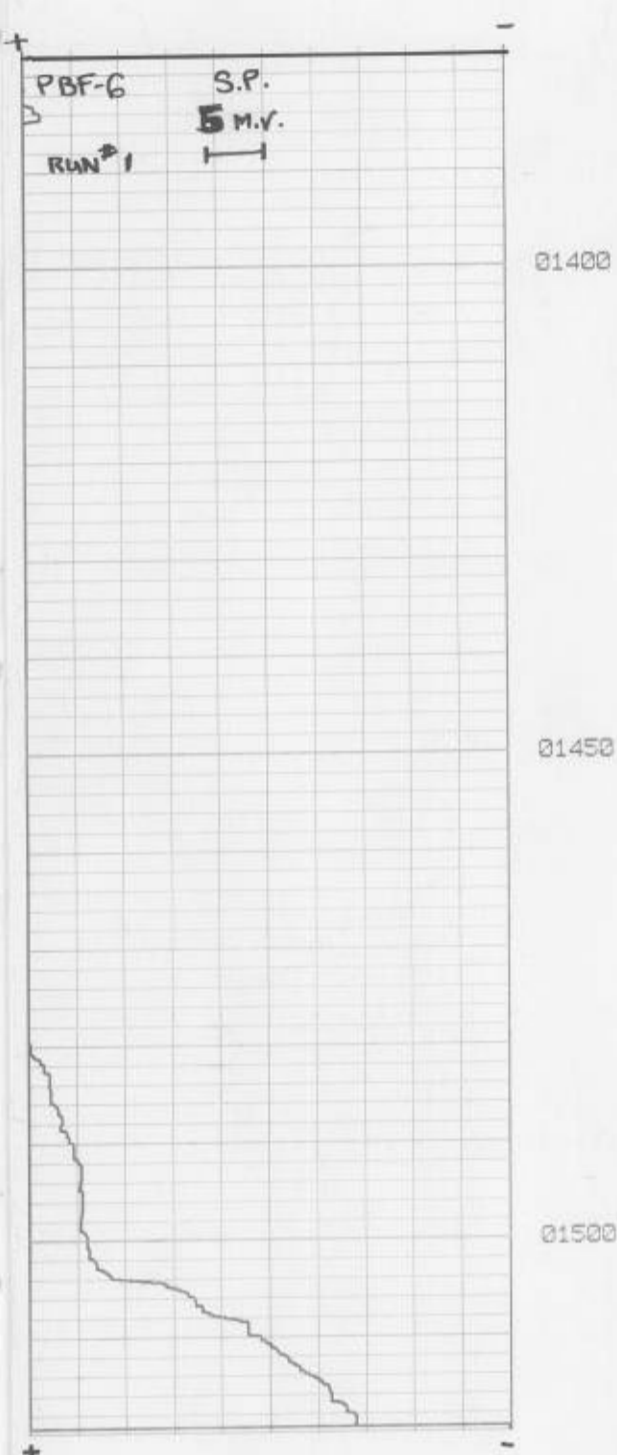



**SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG**

WELL LOCATION

County PALM BEACH
 Station I.D. 0890000050
 Date 08/13/96 Well No. PBF-6
 Latitude 26 40 32.72 Longitude 80 06 11.14
SE 1/4 NW 1/4 NW 1/4 NW 1/4 Section 06 Township 44S Range 43E
 Owner S.F.W.M.D. Phone (561)688-8800
 Driller R.T.S. Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
 Cl NA mg/l Type of Fluid NA
 Temp. 72.2 F o/C Field Density NA o/C
 T.D.S. NA mg/l Spec. Cond. NA umhos/cm

Logged By: DAUENHAUER/DEMONSTRANT/DAUENHAUER

Scale * RUN #1 = 90 OHMS / RUN #2 = 100 OHMS

Digitized By: NA

WELL CONSTRUCTION



Drilling Method: Rot. (X) Air (X) CT () Auger () Other
 T. Depth-Driller 1520' T. Depth-Logger 1520'
 Casing Depth Driller 1385' Casing Depth Logger 1385'
 Bit Size NA Casing Dia. LD. 11.97"
 Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
 Type of Casing STEEL Casing Thickness 0.03"
 Type of Screen OPEN HOLE Screen Int. From NA To NA
 Yield Flow 600 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6'	<input checked="" type="checkbox"/> (2)	Density	()
Casiper	<input checked="" type="checkbox"/> (2)	cd	()
Flow meter	<input checked="" type="checkbox"/> (x)	Fluid Sampler	()
16", 64" normals	<input checked="" type="checkbox"/> (2)	Temperature	<input checked="" type="checkbox"/> (x)
Neutron	<input checked="" type="checkbox"/> (x)	Delta Temp.	<input checked="" type="checkbox"/> (x)
Natural Gamma	<input checked="" type="checkbox"/> (x)	SP	<input checked="" type="checkbox"/> (x)
Fluid Resistivity	<input checked="" type="checkbox"/> (x)	Single PL	<input checked="" type="checkbox"/> (x)

COMMENTS

NO COMMENTS

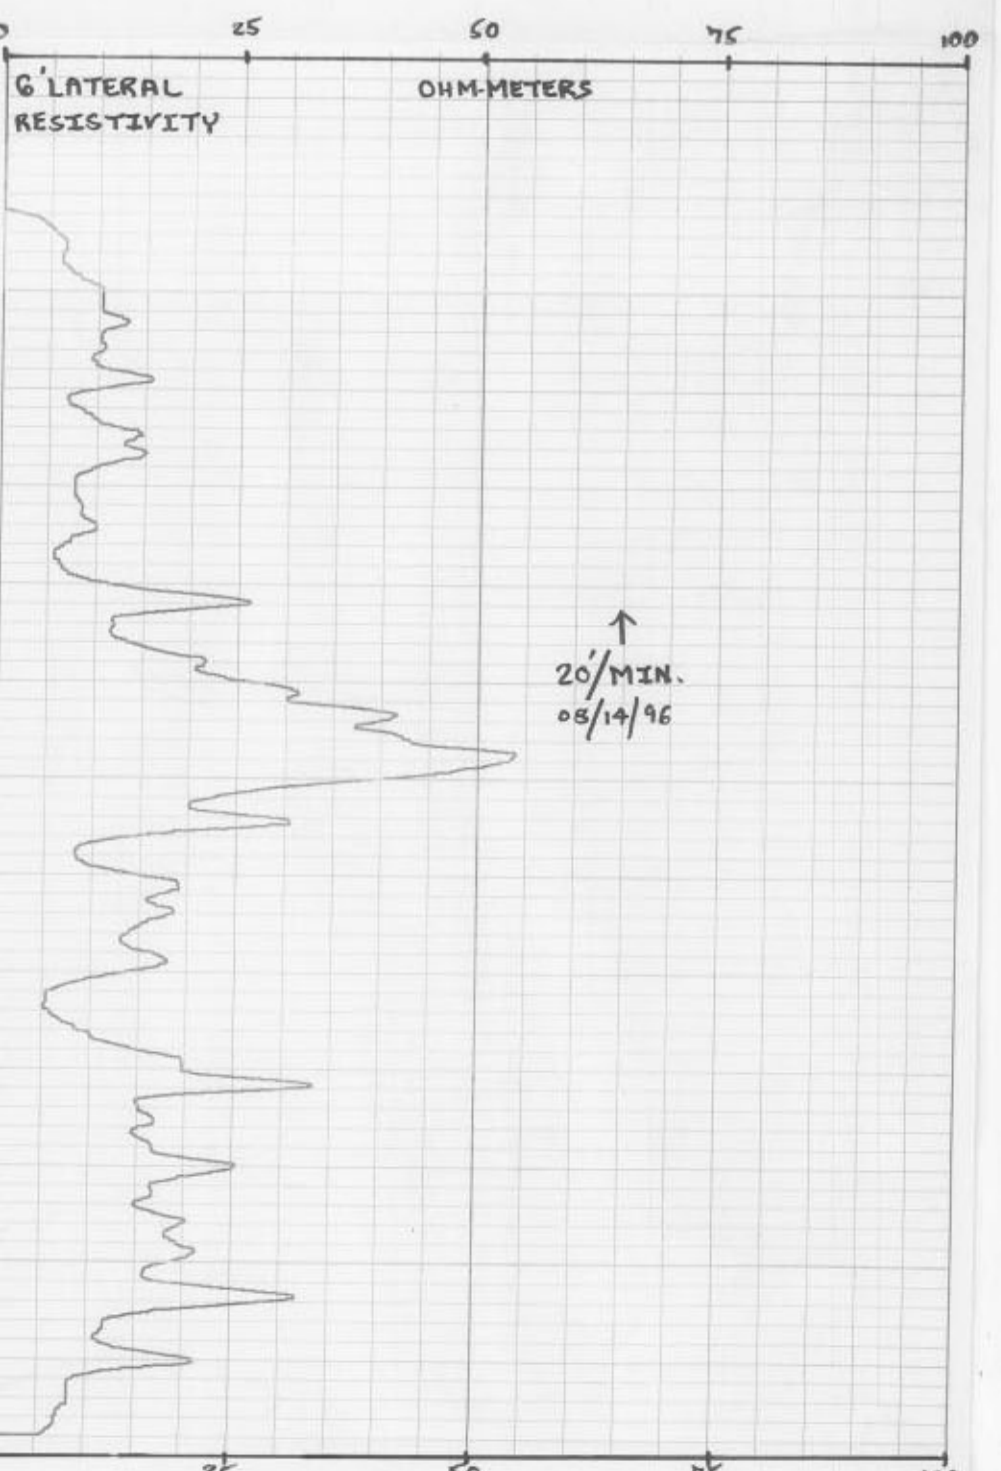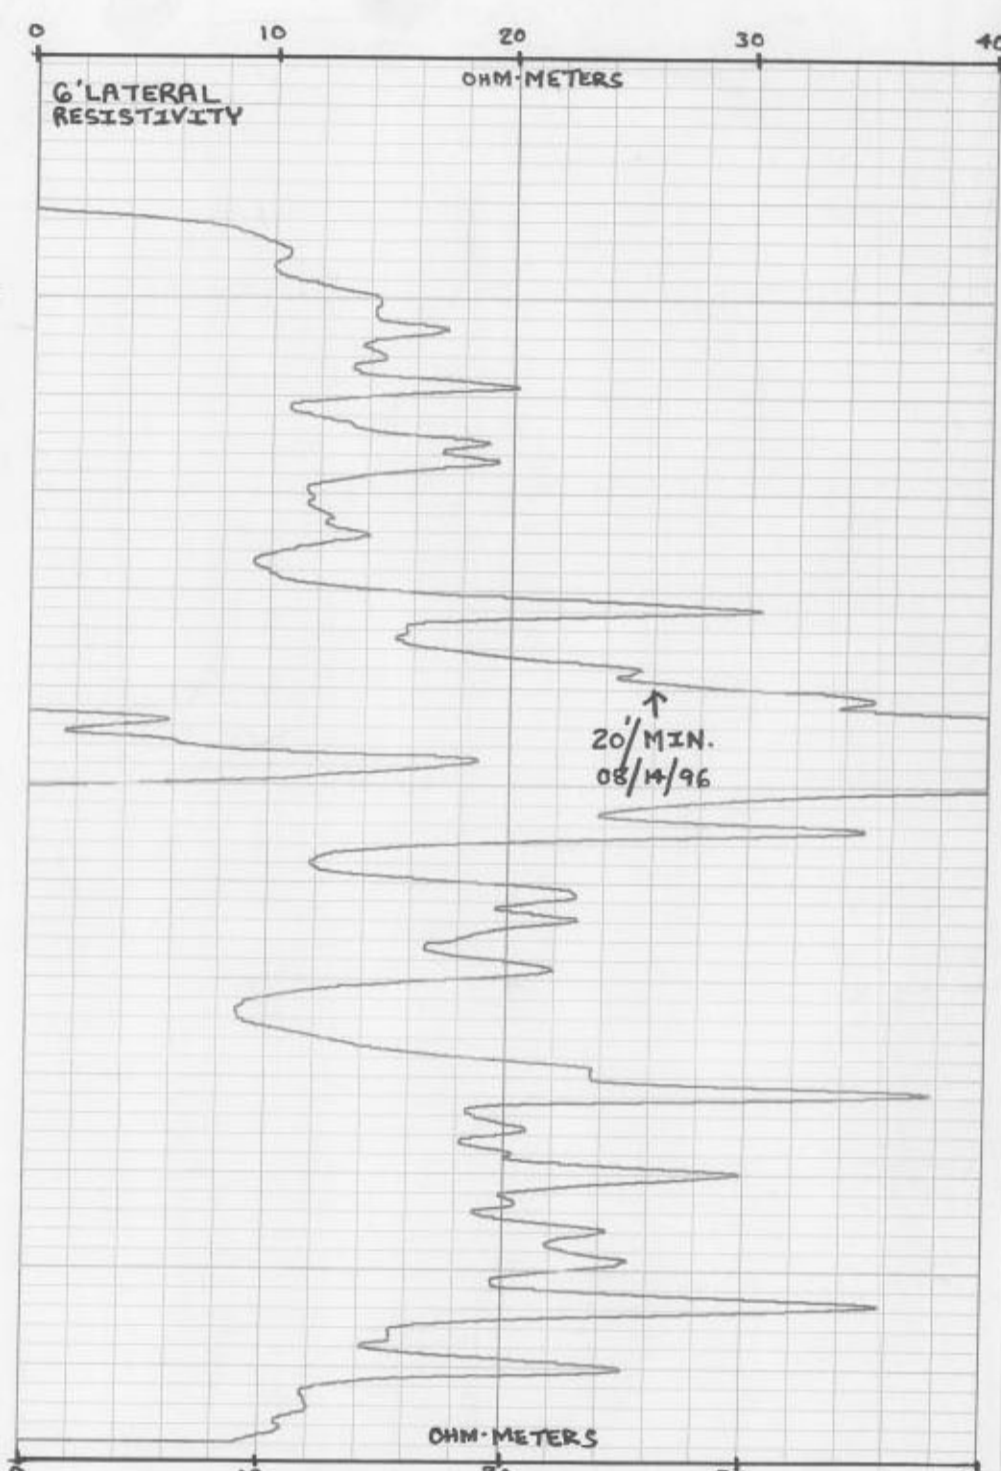



SOUTH FLORIDA WATER MANAGEMENT DISTRICT
WELL LOG

WELL LOCATION

County PALM BEACH
Station I.D. 09B0000050
Date 08/13/96 Well No. PBF-6
Latitude 26 40 32.72 Longitude 80 06 11.14
SE 1/4 NW 1/4 NW 1/4 NW 1/4 Section 06 Township 44S Range 43E
Owner S.F.W.M.D. Phone (561)686-8800
Driller R.T.S. Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. NA

FLUID QUALITY

Date NA Time NA Source of Sample NA
C NA mg/l Type of Fluid NA
Temp. 72.2 F o/C Field Density NA o/C
T.D.S. NA mg/l Spec. Cond. NA umhos/cm

Logged By: DAUENHAUER/DEMONTI
Checked By: DEMONSTRANTI/DAUENHAUER

Scale * 40 OHMS

Digitized By: NA

WELL CONSTRUCTION

Drilling Method: RoL(x) Air(x) CT() Auger() Other
T. Depth-Driller 1520' T. Depth-Logger 1520'
Casing Depth Driller 1385' Casing Depth Logger 1385'
Bit Size NA Casing Dia. I.D. 11.97"
Hole Dia. 12" From 0' To 590' Dia. 8" From 590' To 1520'
Type of Casing STEEL Casing Thickness 0.03"
Type of Screen OPEN HOLE Screen InL. From NA To NA
Yield Flow 800 GPM Well Use A.P.T.

TYPE OF SURVEYS RUN

Lateral 6"	(x)(2)	Density	()
Caliper	(x)(2)	cd	()
Flow meter	(x)	Fluid Sampler	()
16", 64" normals	(x)(2)	Temperature	(x)
Neutron	(x)	Delta Temp.	(x)
Natural Gamma	(x)	SP	●
Fluid Resistivity	(x)	Single PL	●

COMMENTS

NO COMMENTS

