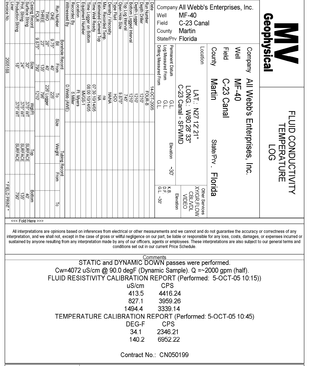

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

CALCULATIONS

STATIC and DYNAMIC DOWN passes were performed:
Cwr=4072 uS/cm @ 90.0 degF (Dynamic Sample). Q =~2000 gpm (half).
FLUID RESISTIVITY CALIBRATION REPORT (Performed: 5-OCT-05 10:15))

uS/cm	CPS
413.5	4410.24
827.1	3956.26
1494.4	3339.14
140.2	6952.22

TEMPERATURE CALIBRATION REPORT (Performed: 5-OCT-05 10:45)

DEG-F	CPS
34.1	2346.21
140.2	6952.22

Contract No.: CN050199

DYNAMIC FCT DOWN

Database File: wwe3cone.db
Dataset Pathname: run5/DFCT
Presentation Format: FCTMF40
Dataset Creation: Fri Oct 14 12:57:22 2005
Charted by: Depth in Feet scaled 1:240

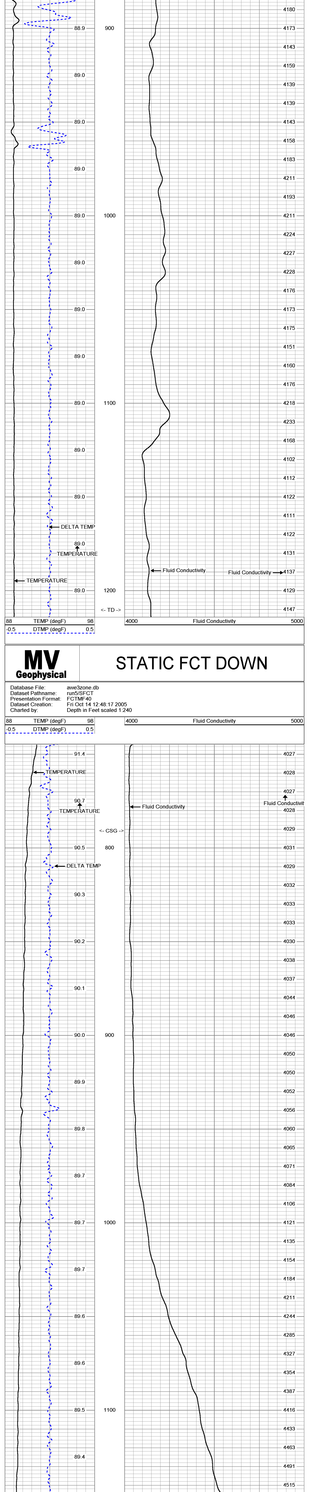

STATIC FCT DOWN
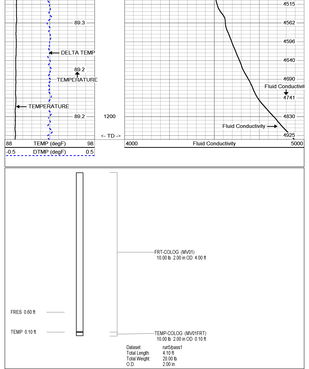
Database File: wwe3cone.db
Dataset Pathname: run5/SFCT
Presentation Format: FCTMF40
Dataset Creation: Fri Oct 14 12:48:17 2005
Charted by: Depth in Feet scaled 1:240