



SOUTH FLORIDA WATER MANAGEMENT DISTRICT  
WELL LOG

WELL LOCATION

County COLLIER  
Station ID 0210000098  
Date 06/02/97 Well No. NOBLE #2 F.G.S.  
Latitude 26 14 17.2 Longitude 81 04 23.8 X=475977 Y=692215  
NW1/4 SW1/4 NW1/4 NW1/4 Section 07 Township 49S Range 33E  
Owner U.S.G.S. Phone ?  
Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. 1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA  
CINA mg/l Type of Fluid DRILLING MUD  
Temp. NA o/C Field Density NA o/C  
T.D.S. NA mg/l Spec. Cond. NA umhos/cm  
Logged By: E.P. DAUENHAUER Witnessed By: SAME  
Scale NA  
Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot.(X) Air( ) CT( ) Auger( ) Other WIRE LINE CORE  
T. Depth-Driller NA T. Depth-Logger 203'  
Casing Depth Driller 20' Casing Depth Logger 20'  
Bit Size 3 7/8" Casing Dia. I.D. 4"  
Hole Dia. 3 1/2" From 0' To 206' Dia. NA From NA To NA  
Type of Casing P.V.C. Casing Thickness .375  
Type of Screen OPEN HOLE Screen Int. From NA To NA  
Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

|                   |     |               |     |
|-------------------|-----|---------------|-----|
| Lateral 6'        | ( ) | Density       | ( ) |
| Caliper           | (X) | ccl           | ( ) |
| Flow meter        | ( ) | Fluid Sampler | ( ) |
| 16", 64" normals  | (X) | Temperature   | ( ) |
| Neutron           | (X) | Delta Temp.   | ( ) |
| Natural Gamma     | (X) | SP            | (X) |
| Fluid Resistivity | ( ) | Single Pt.    | (X) |

COMMENTS

LOGGED THROUGH TEMPORARY CASING.

F.G.S.  
NOBLE #2

2" 4" 6" 8" 10" 12"  
CALIPER HOLE DIA. 06/02/97

00025

00050

00075

00100

00125

00150

00175

00200

2" 4" 6" 8" 10" 12"



SOUTH FLORIDA WATER MANAGEMENT DISTRICT  
WELL LOG

WELL LOCATION

County COLLIER  
Station ID 0210000098  
Date 06/02/97 Well No. NOBLE #2 F.G.S.  
Latitude 26 14 17.2 Longitude 81 04 23.8 X=475977 Y=692215  
NW 1/4 SW 1/4 NW 1/4 NW 1/4 Section 07 Township 49S Range 33E  
Owner U.S.G.S. Phone ?  
Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. 1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA  
Cl NA mg/l Type of Fluid DRILLING MUD  
Temp. NA o/C Field Density NA o/C  
T.D.S. NA mg/l Spec. Cond. NA umhos/cm  
Logged By: E.P. DAUENHAUER Witnessed By: SAME  
Scale NA  
Digitized By: NA

WELL CONSTRUCTION


Drilling Method: Rot. (X) Air ( ) CT ( ) Auger ( ) Other WIRE LINE CORE  
T. Depth-Driller NA T. Depth-Logger 203'  
Casing Depth Driller 20' Casing Depth Logger 20'  
Bit Size 3 7/8" Casing Dia. I.D. 4"  
Hole Dia. 3 1/2" From 0' To 206' Dia. NA From NA To NA  
Type of Casing P.V.C. Casing Thickness .375  
Type of Screen OPEN HOLE Screen Int. From NA To NA  
Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

Lateral 6' ( ) Density ( )  
Caliper (X) ccl ( )  
Flow meter ( ) Fluid Sampler ( )  
16", 64" normal (X) Temperature ( )  
Neutron (X) Delta Temp. ( )  
Natural Gamma (X) SP (X)  
Fluid Resistivity ( ) Single PL (X)

COMMENTS

LOGGED THROUGH TEMPORARY CASING.

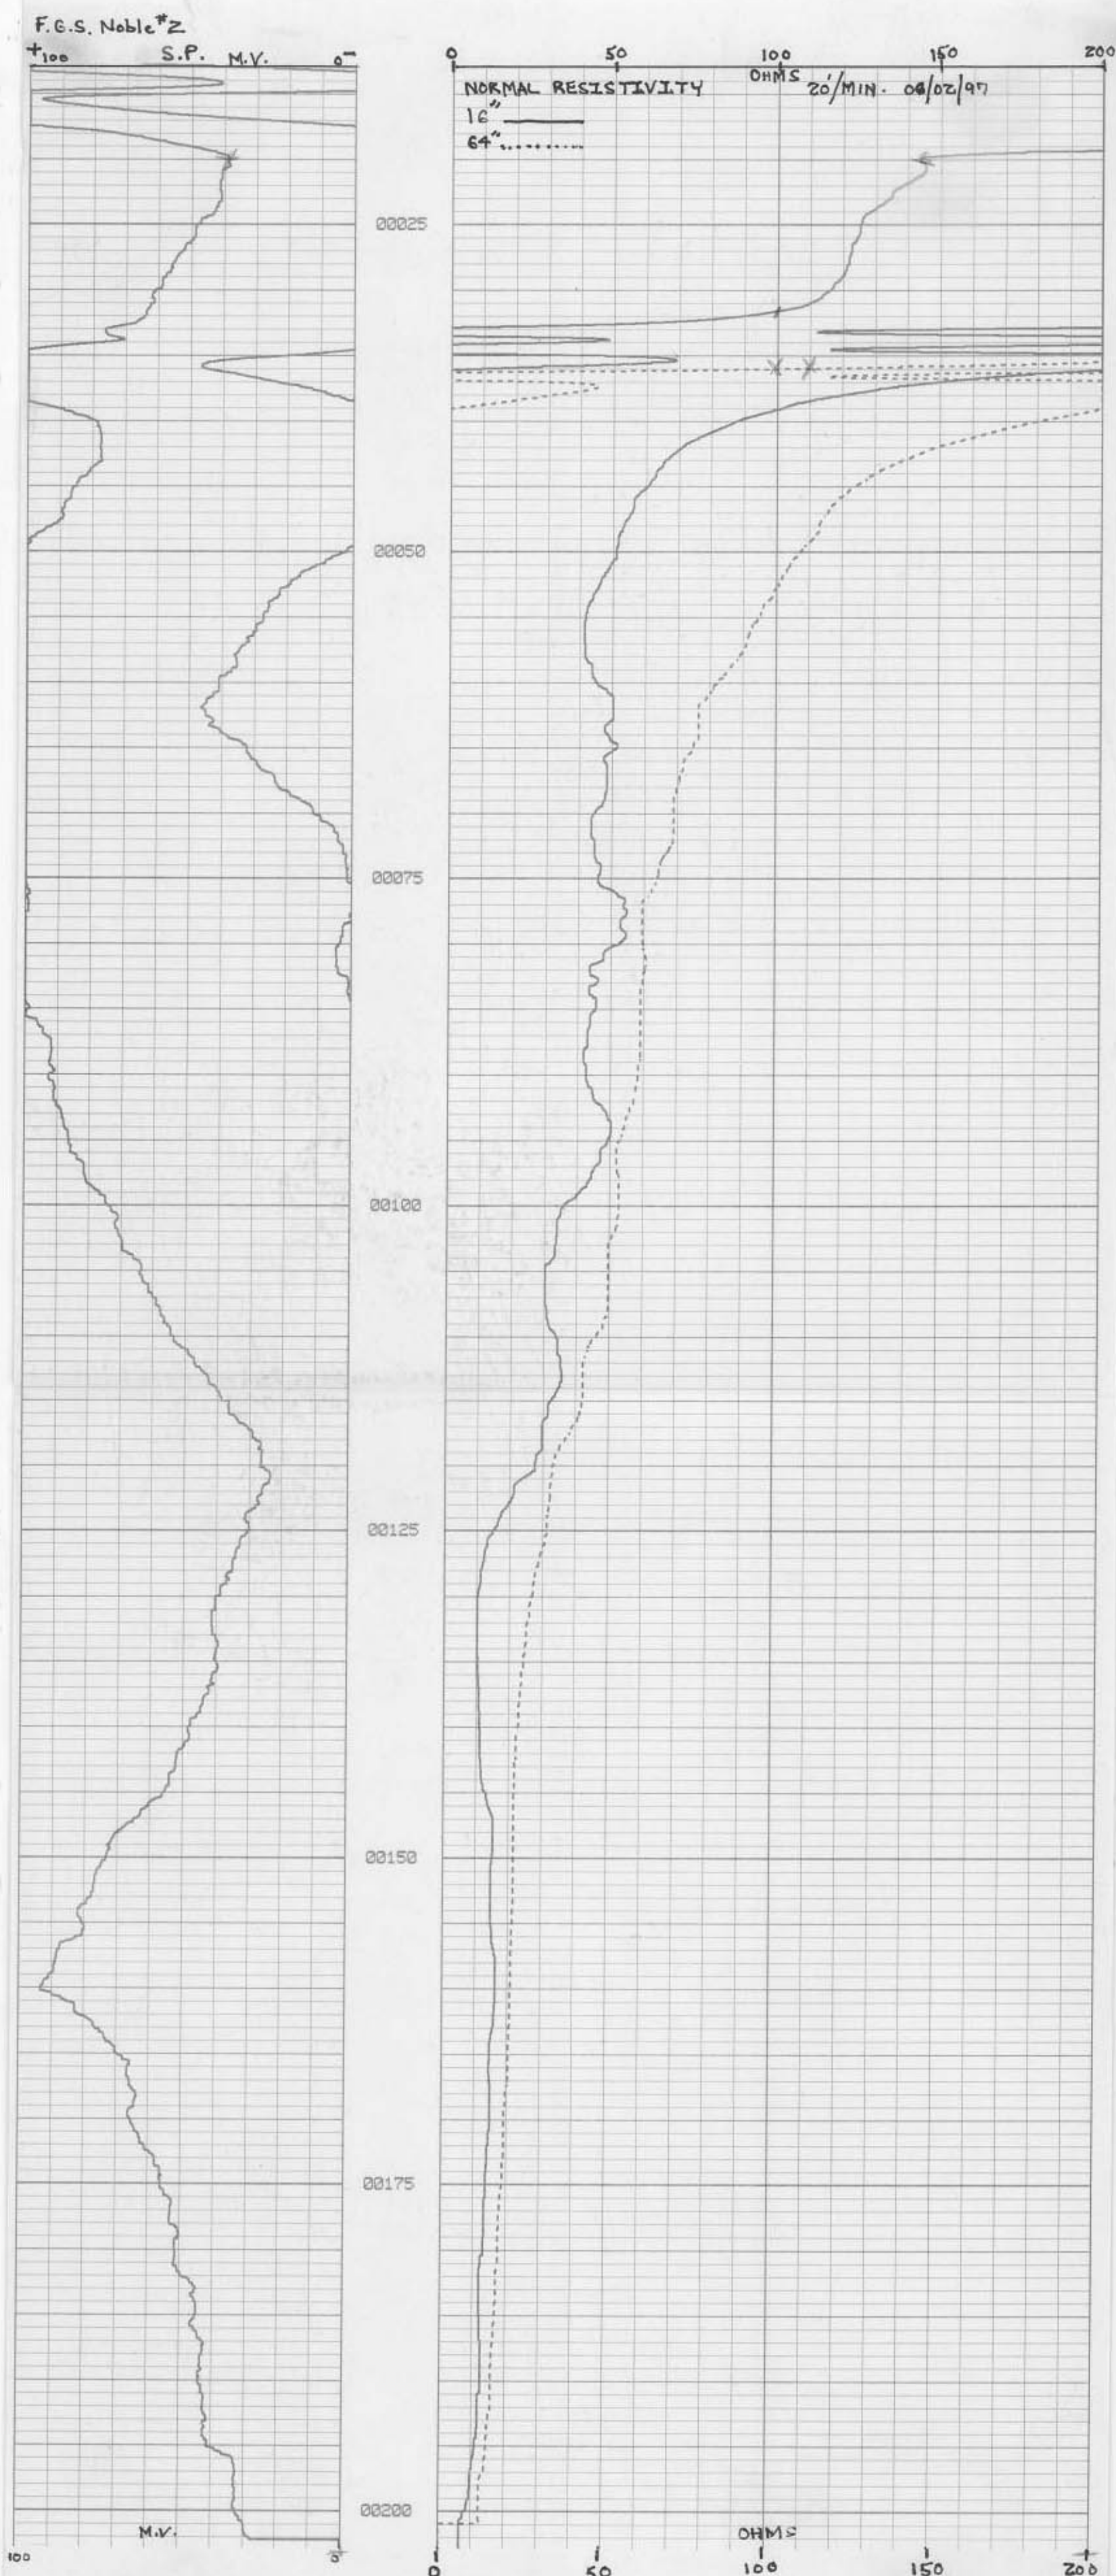



SOUTH FLORIDA WATER MANAGEMENT DISTRICT  
WELL LOG

WELL LOCATION

County COLLIER  
Station I.D. 0210000098  
Date 06/02/97 Well No. NOBLE #2 F.G.S.  
Latitude 26 14 17.2 Longitude 81 04 23.8 X=475977 Y=692215  
NW1/4 SW1/4 NW1/4 NW1/4 Section 07 Township 49S Range 33E  
Owner U.S.G.S. Phone ?  
Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. 1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA  
Cl NA mg/l Type of Fluid DRILLING MUD  
Temp. NA o/C Field Density NA o/C  
T.D.S. NA mg/l Spec. Cond. NA umhos/cm  
Logged By: E.P. DAUENHAUER Witnessed By: SAME  
Scale NA  
Digitized By: NA


WELL CONSTRUCTION

Drilling Method: Rot(X) Air( ) CT( ) Auger( ) Other WIRE LINE CORE  
T. Depth-Driller NA T. Depth-Logger 203'  
Casing Depth Driller 20' Casing Depth Logger 20'  
Bit Size 3 7/8" Casing Dia. I.D. 4"  
Hole Dia. 3 1/2" From 0' To 206' Dia. NA From NA To NA  
Type of Casing P.V.C. Casing Thickness .375  
Type of Screen OPEN HOLE Screen Int. From NA To NA  
Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

|                   |     |               |     |
|-------------------|-----|---------------|-----|
| Lateral 6'        | ( ) | Density       | ( ) |
| Caliper           | (X) | cd            | ( ) |
| Flow meter        | ( ) | Fluid Sampler | ( ) |
| 16", 64" normals  | (X) | Temperature   | ( ) |
| Neutron           | (X) | Delta Temp.   | ( ) |
| Natural Gamma     | (X) | SP            | (X) |
| Fluid Resistivity | ( ) | Single Pt.    | (X) |

COMMENTS LOGGED THROUGH TEMPORARY CASING.

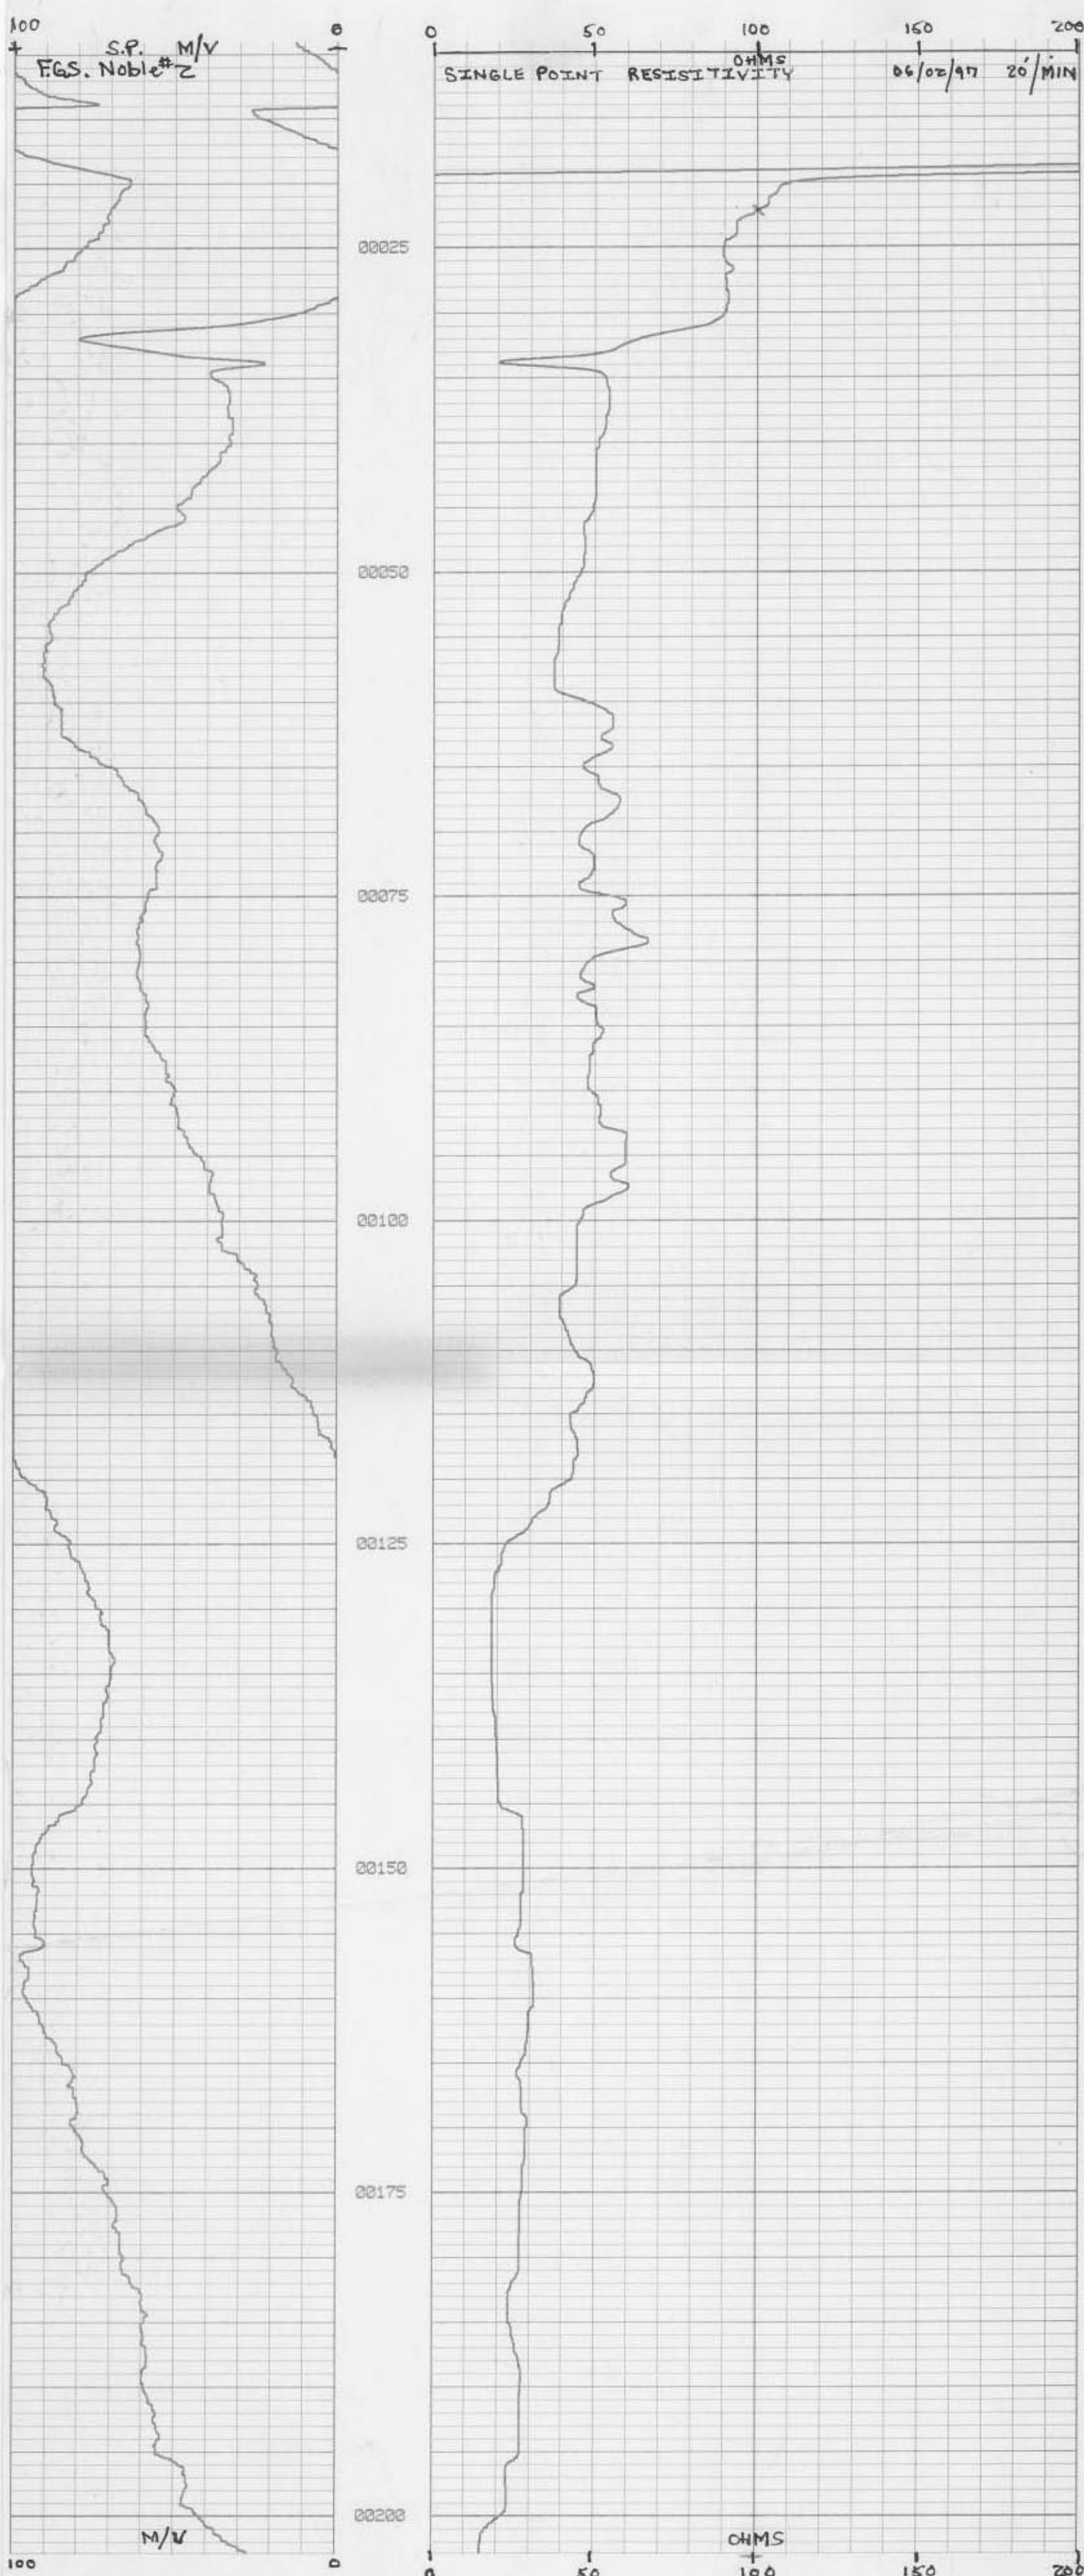



SOUTH FLORIDA WATER MANAGEMENT DISTRICT  
WELL LOG

WELL LOCATION

County COLLIER  
Station I.D. 0210000089  
Date 06/02/97 Well No. NOBLE #2 F.G.S.  
Latitude 26 14 17.2 Longitude 81 04 23.8 X=475977 Y=692215  
NW1/4 SW1/4 NW1/4 NW1/4 Section 07 Township 49S Range 33E  
Owner U.S.G.S. Phone ?  
Driller J. TRINDLE Date Drilled NONE

DATUM

L.S. +17.00' T.O.C. 1.30'

FLUID QUALITY

Date NA Time NA Source of Sample NA  
Cl NA mg/l Type of Fluid DRILLING MUD  
Temp. NA o/C Field Density NA o/C  
T.D.S. NA mg/l Spec. Cond. NA umhos/cm  
Logged By: E.P. DAUENHAUER Witnessed By: SAME  
Scale NA  
Digitized By: NA

WELL CONSTRUCTION

Drilling Method: Rot. (X) Air ( ) CT ( ) Auger ( ) Other WIRE LINE CORE  
T. Depth-Driller NA T. Depth-Logger 203'  
Casing Depth Driller 20' Casing Depth Logger 20'  
Bit Size 3 7/8" Casing Dia. I.D. 4"  
Hole Dia. 3 1/2" From 0' To 206' Dia. NA From NA To NA  
Type of Casing P.V.C. Casing Thickness .375  
Type of Screen OPEN HOLE Screen Int. From NA To NA  
Yield Flow NA Well Use EXPLORATION/MONITOR

TYPE OF SURVEYS RUN

|                   |     |               |     |
|-------------------|-----|---------------|-----|
| Lateral 6'        | ( ) | Density       | ( ) |
| Caliper           | (X) | cdl           | ( ) |
| Flow meter        | ( ) | Fluid Sampler | ( ) |
| 16", 64" normals  | (X) | Temperature   | ( ) |
| Neutron           | (X) | Delta Temp.   | ( ) |
| Natural Gamma     | (X) | SP            | (X) |
| Fluid Resistivity | ( ) | Single Pt.    | (X) |

COMMENTS

LOGGED THROUGH TEMPORARY CASING.

F.G.S. Noble #2

