X-Y CALIPER GAMMA RAY LOG

ALLWEBBS ENTERPRISES, INC.

Company	FLORIDA KEYS AQUEDUCT AUTHORITY
Well	PW #2
Field	J.ROBERT DEAN W.T.P
County	DADE
State	FLORIDA

Company FLORIDA KEYS AQUEDUCT AUTHORITY
Well PW #2
Field J.ROBERT DEAN W.T.P
County DADE State FLORIDA

Location: API # :
PROJECT # 1085 - 05
SEC TWP RGE

Other Services: SEE COMMENTS

Permanent Datum	PAD	Elevation	K.B.
Log Measured From	PAD		D.F.
Drilling Measured From	PAD		G.L.

Date	03-SEPT-2008
Run Number	ONE
Depth Driller	200'
Depth Logger	200'
Bottom Logged Interval	200'
Top Log Interval	CASING
Open Hole Size	12.25"
Type Fluid	WATER
Density / Viscosity	NA
Max. Recorded Temp.	NA
Estimated Cement Top	NA
Time Well Ready	ON ARRIVAL
Time Logger on Bottom	0000
Equipment Number	VA-203
Location	JUIPTER
Recorded By	LEE
Witnessed By	P. HILL

Borehole Record				Tubing Record		
Run Number	Bit	From	To	Size	Weight	From	To
ONE	12.25"	CASING	200'				

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	44"	.375 W.T	SURFACE	40'
Prot. String				
Production String				
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

DIL/LL3/SP

MAIN PASS

Database File: fkaapw2.db
Dataset Pathname: XYCMP
Presentation Format: xyc
Dataset Creation: Thu Sep 04 08:53:45 2008 by Log Open-Cased 070814
Charted by: Depth in Feet scaled 1:1200

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

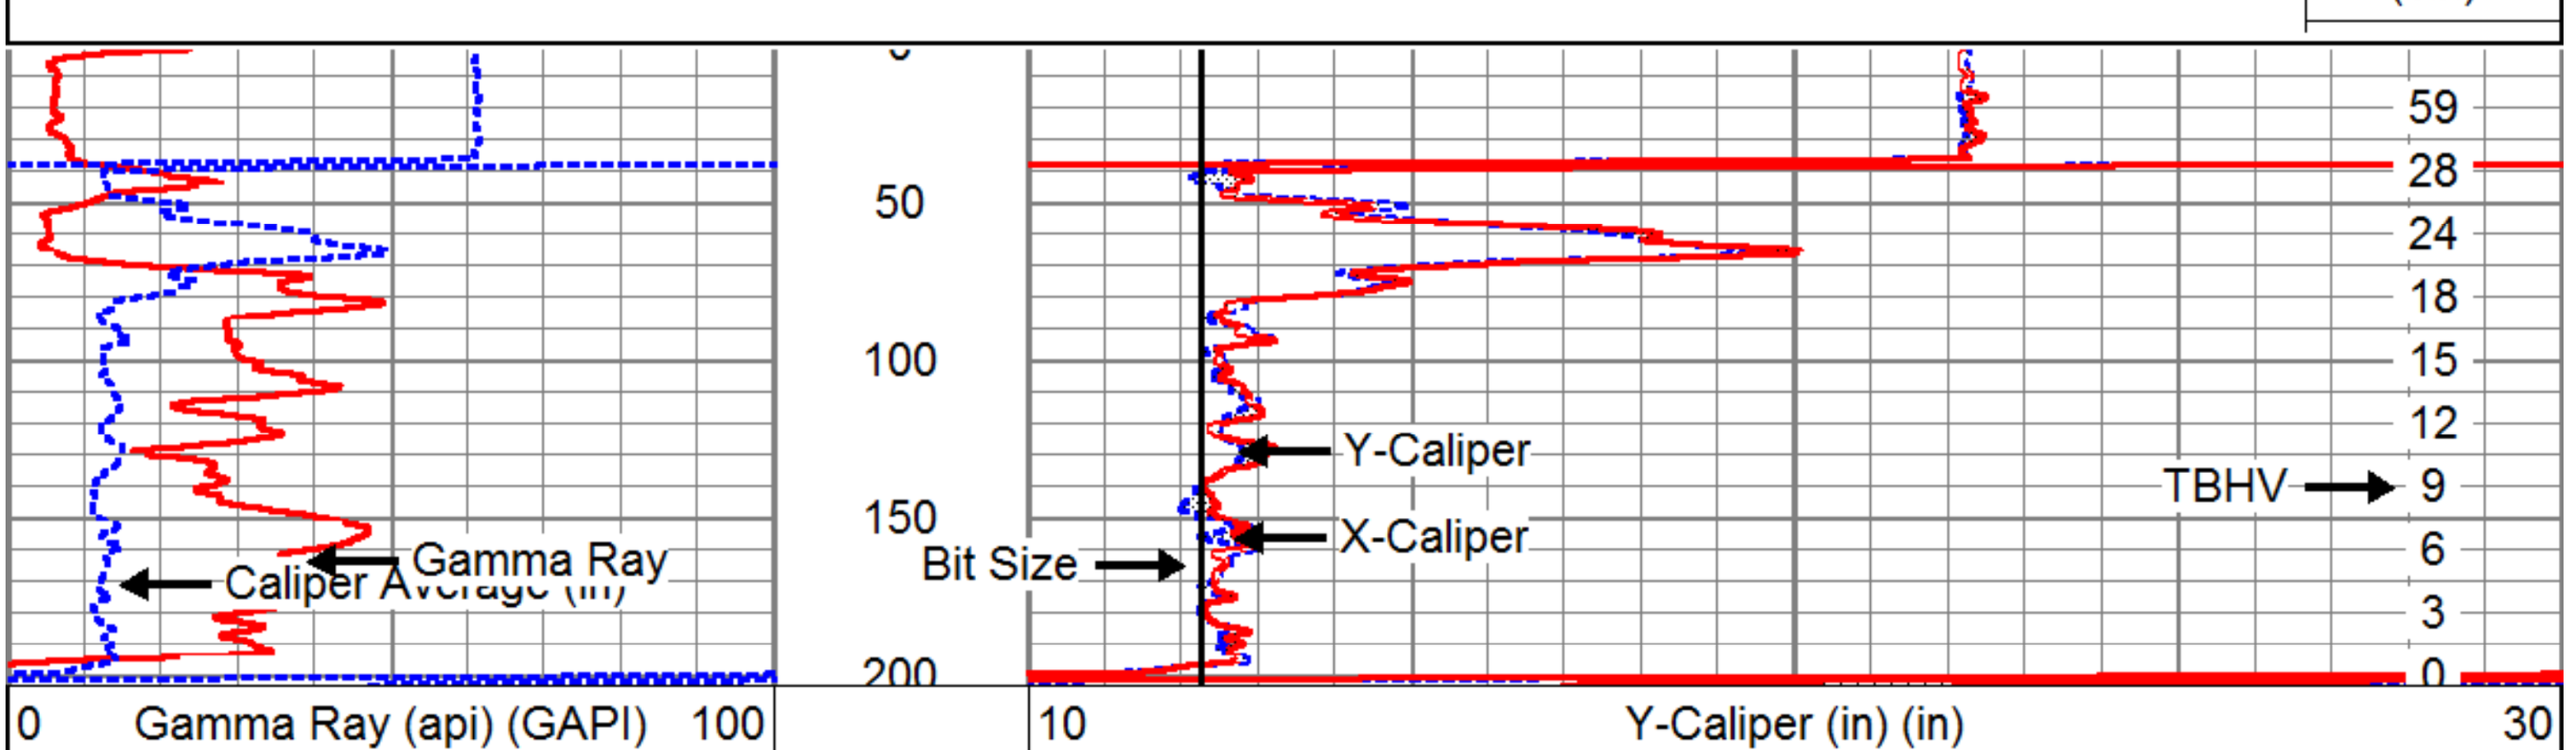

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

MAIN PASS

Database File: fkaapw2.db
Dataset Pathname: XYCMP
Presentation Format: xyc
Dataset Creation: Thu Sep 04 08:53:45 2008 by Log Open-Cased 070814
Charted by: Depth in Feet scaled 1:600

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

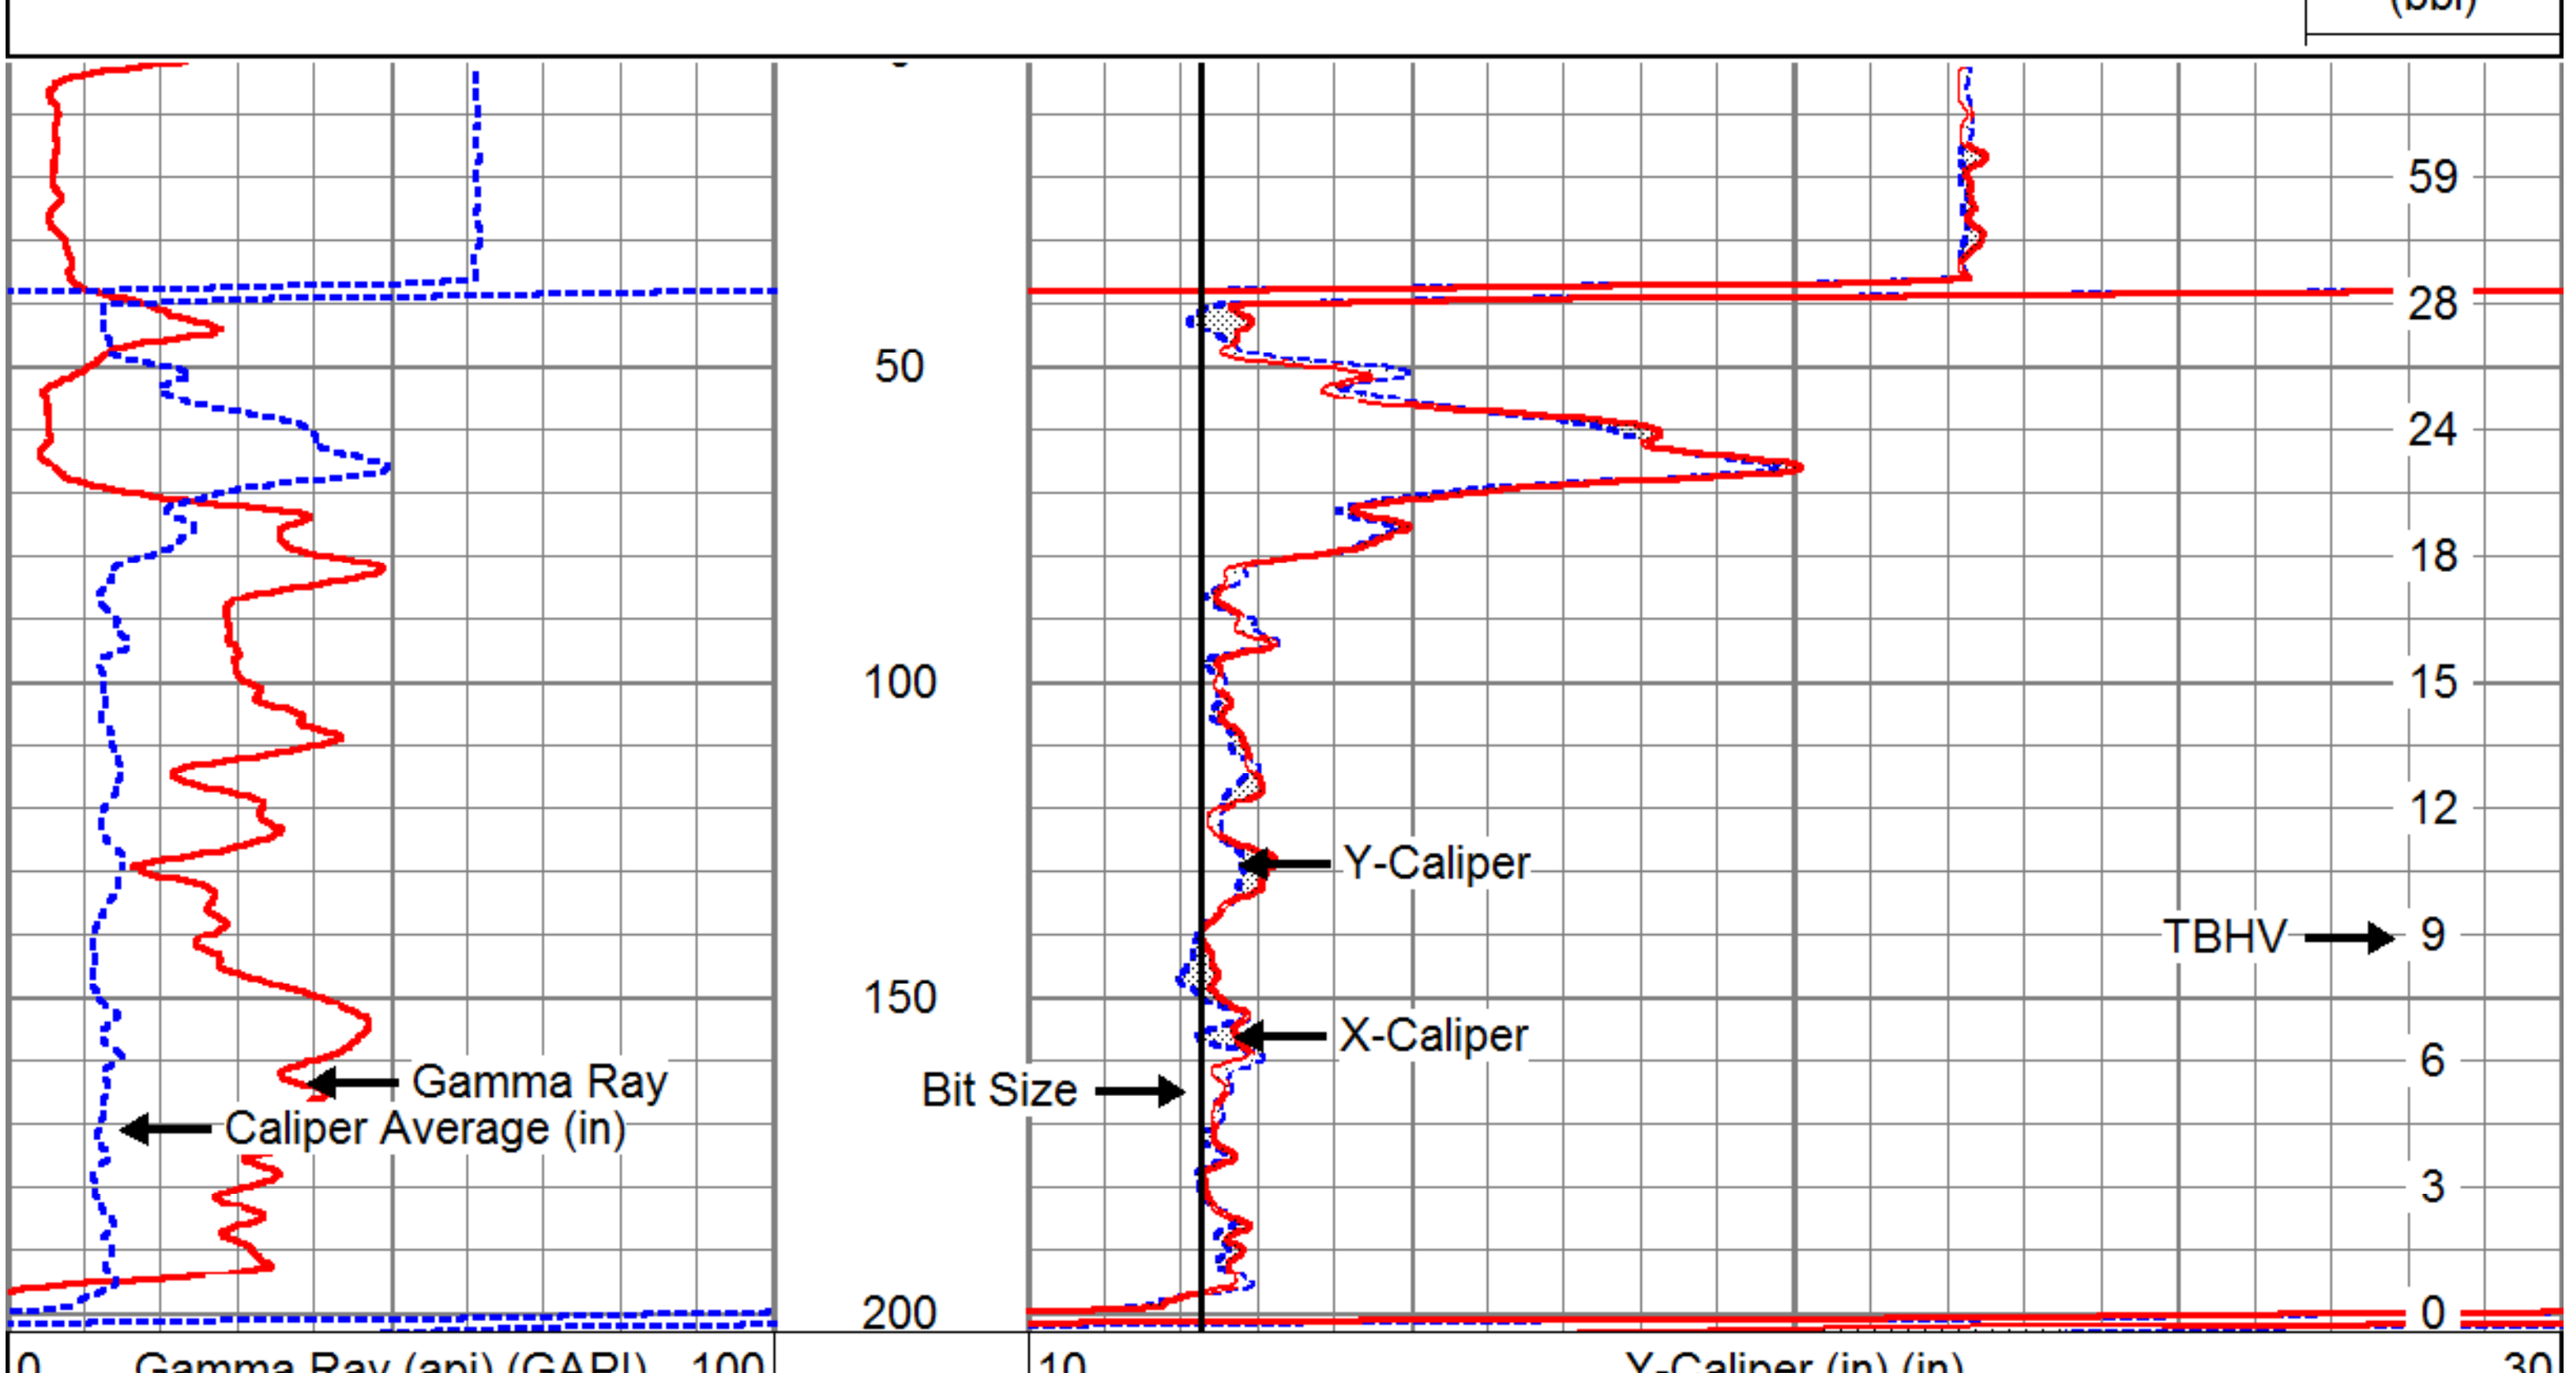

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

MAIN PASS

Database File: fkaapw2.db
Dataset Pathname: XYCMP
Presentation Format: xyc
Dataset Creation: Thu Sep 04 08:53:45 2008 by Log Open-Cased 070814
Charted by: Depth in Feet scaled 1:240

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

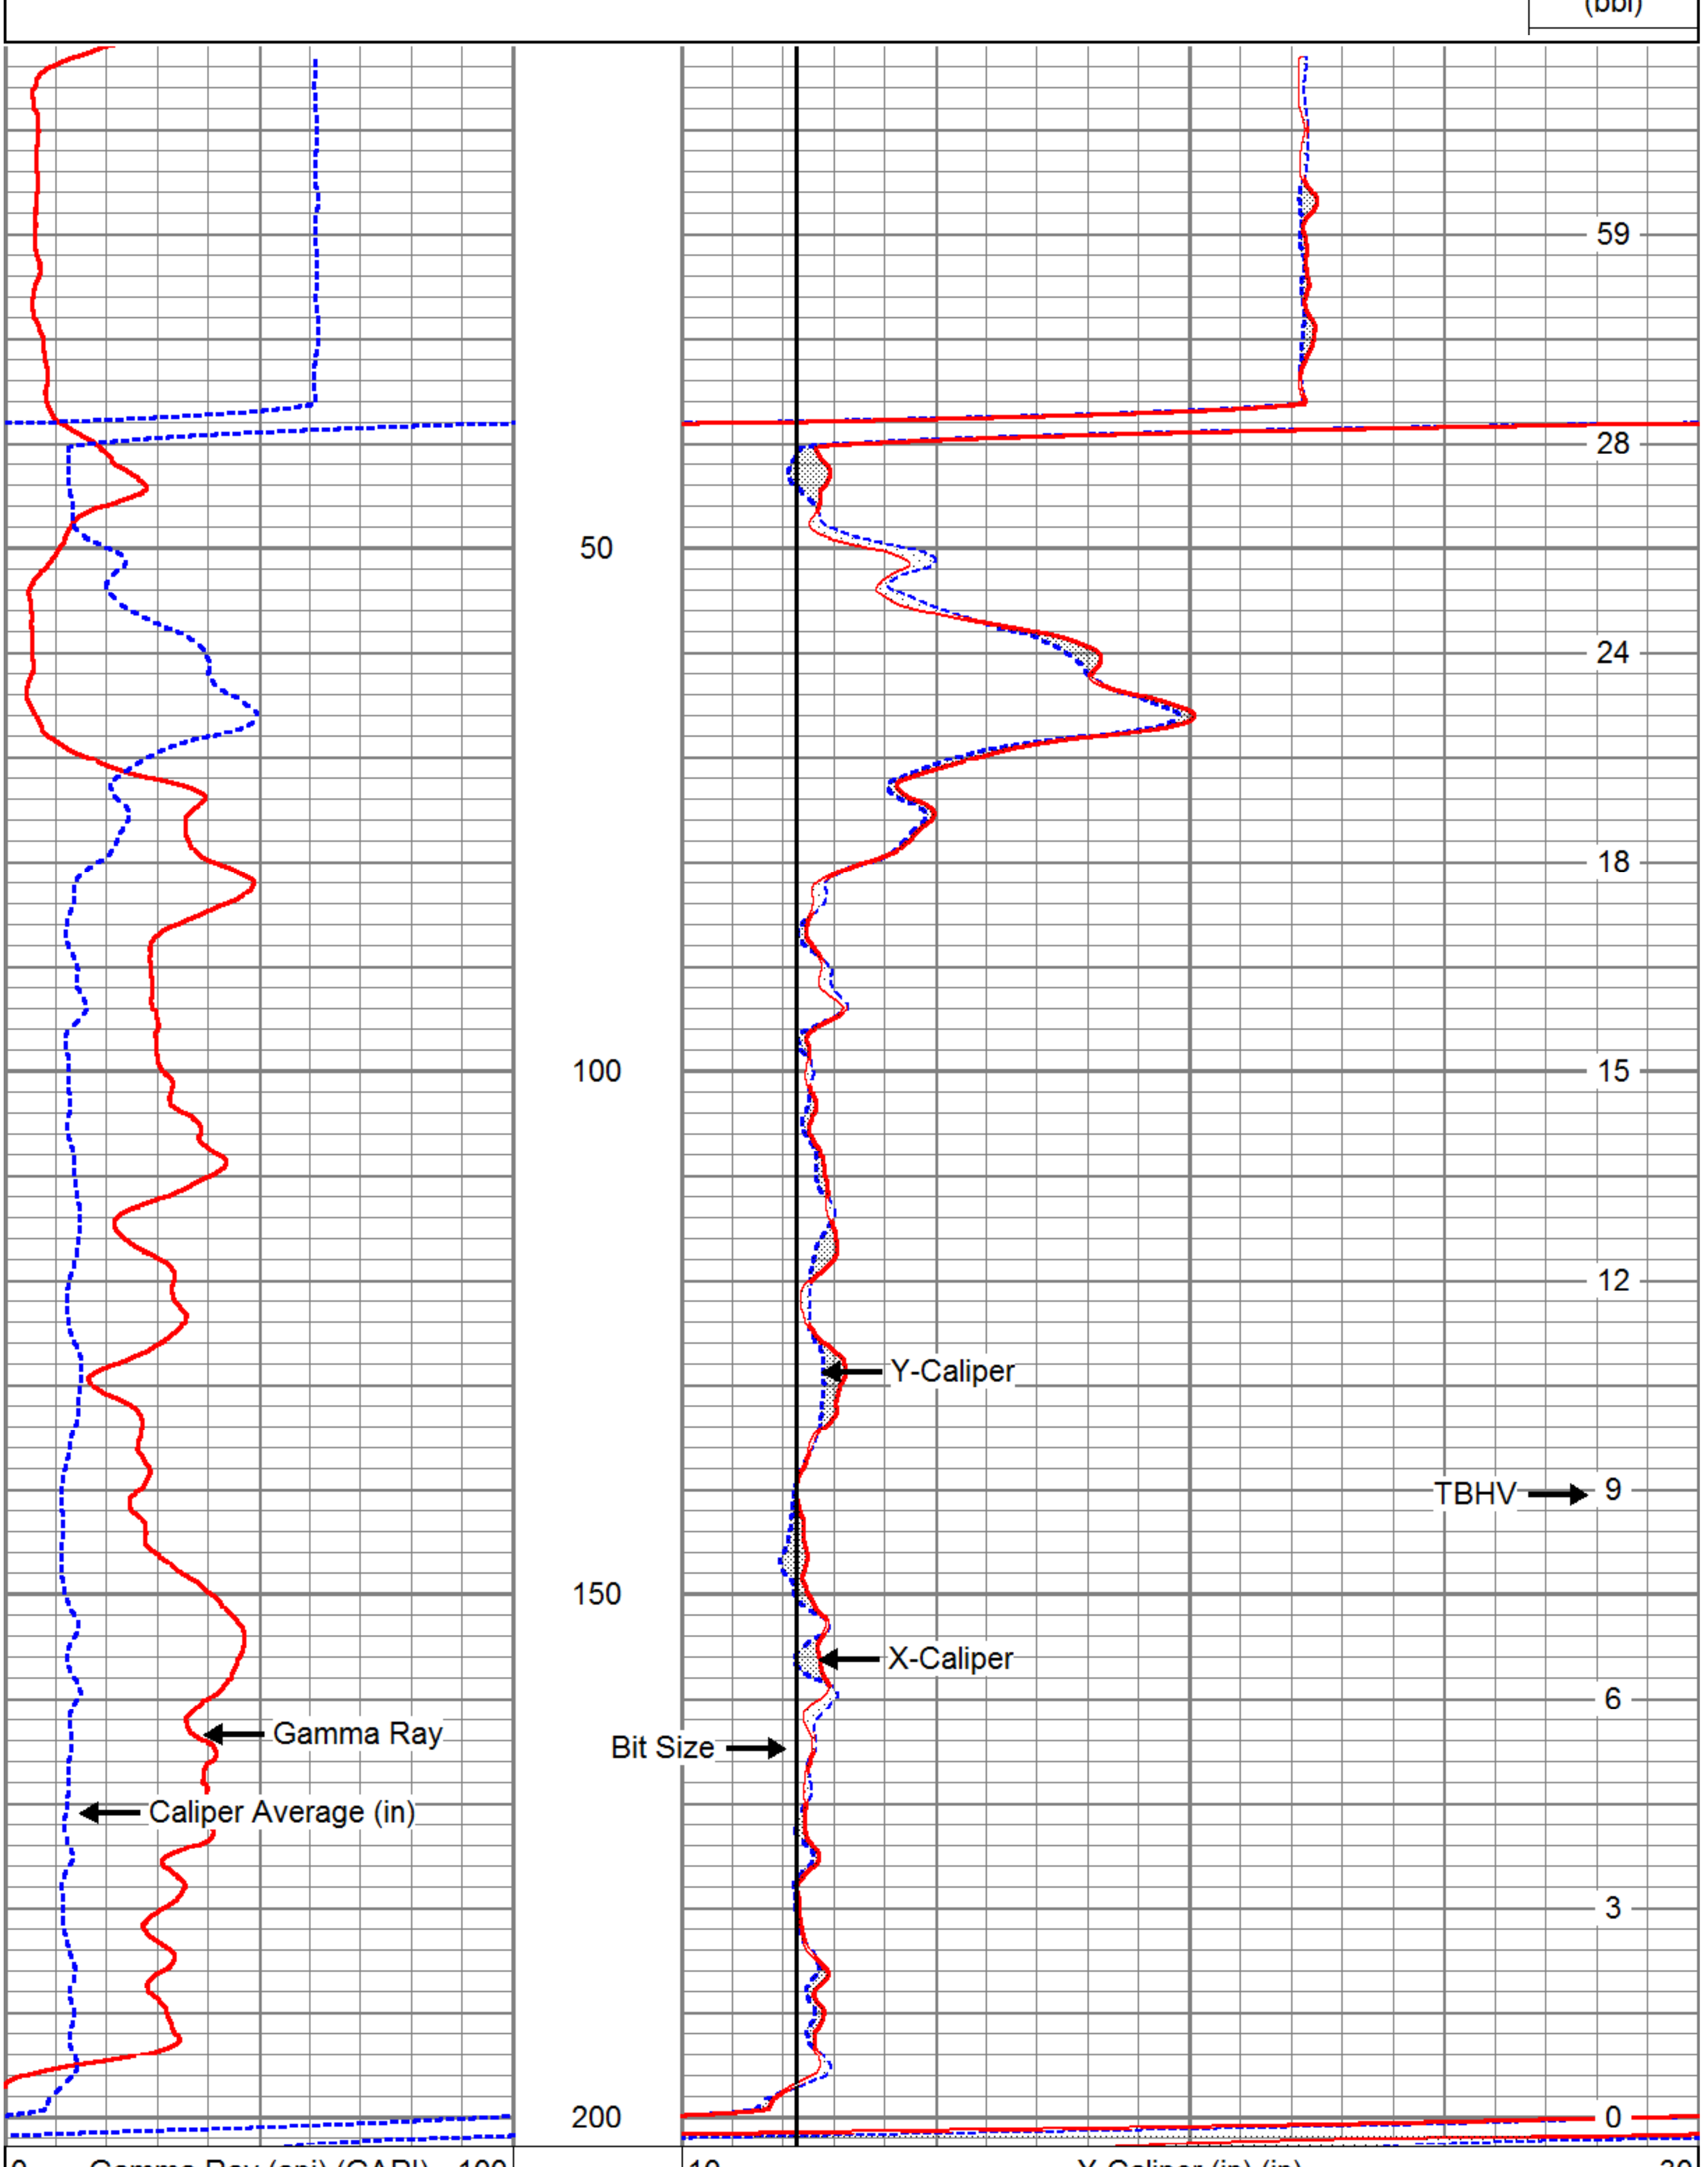

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

REPEAT PASS

Database File: fkaapw2.db
Dataset Pathname: XYC
Presentation Format: xyc
Dataset Creation: Thu Sep 04 08:45:23 2008 by Log Open-Cased 070814
Charted by: Depth in Feet scaled 1:240

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

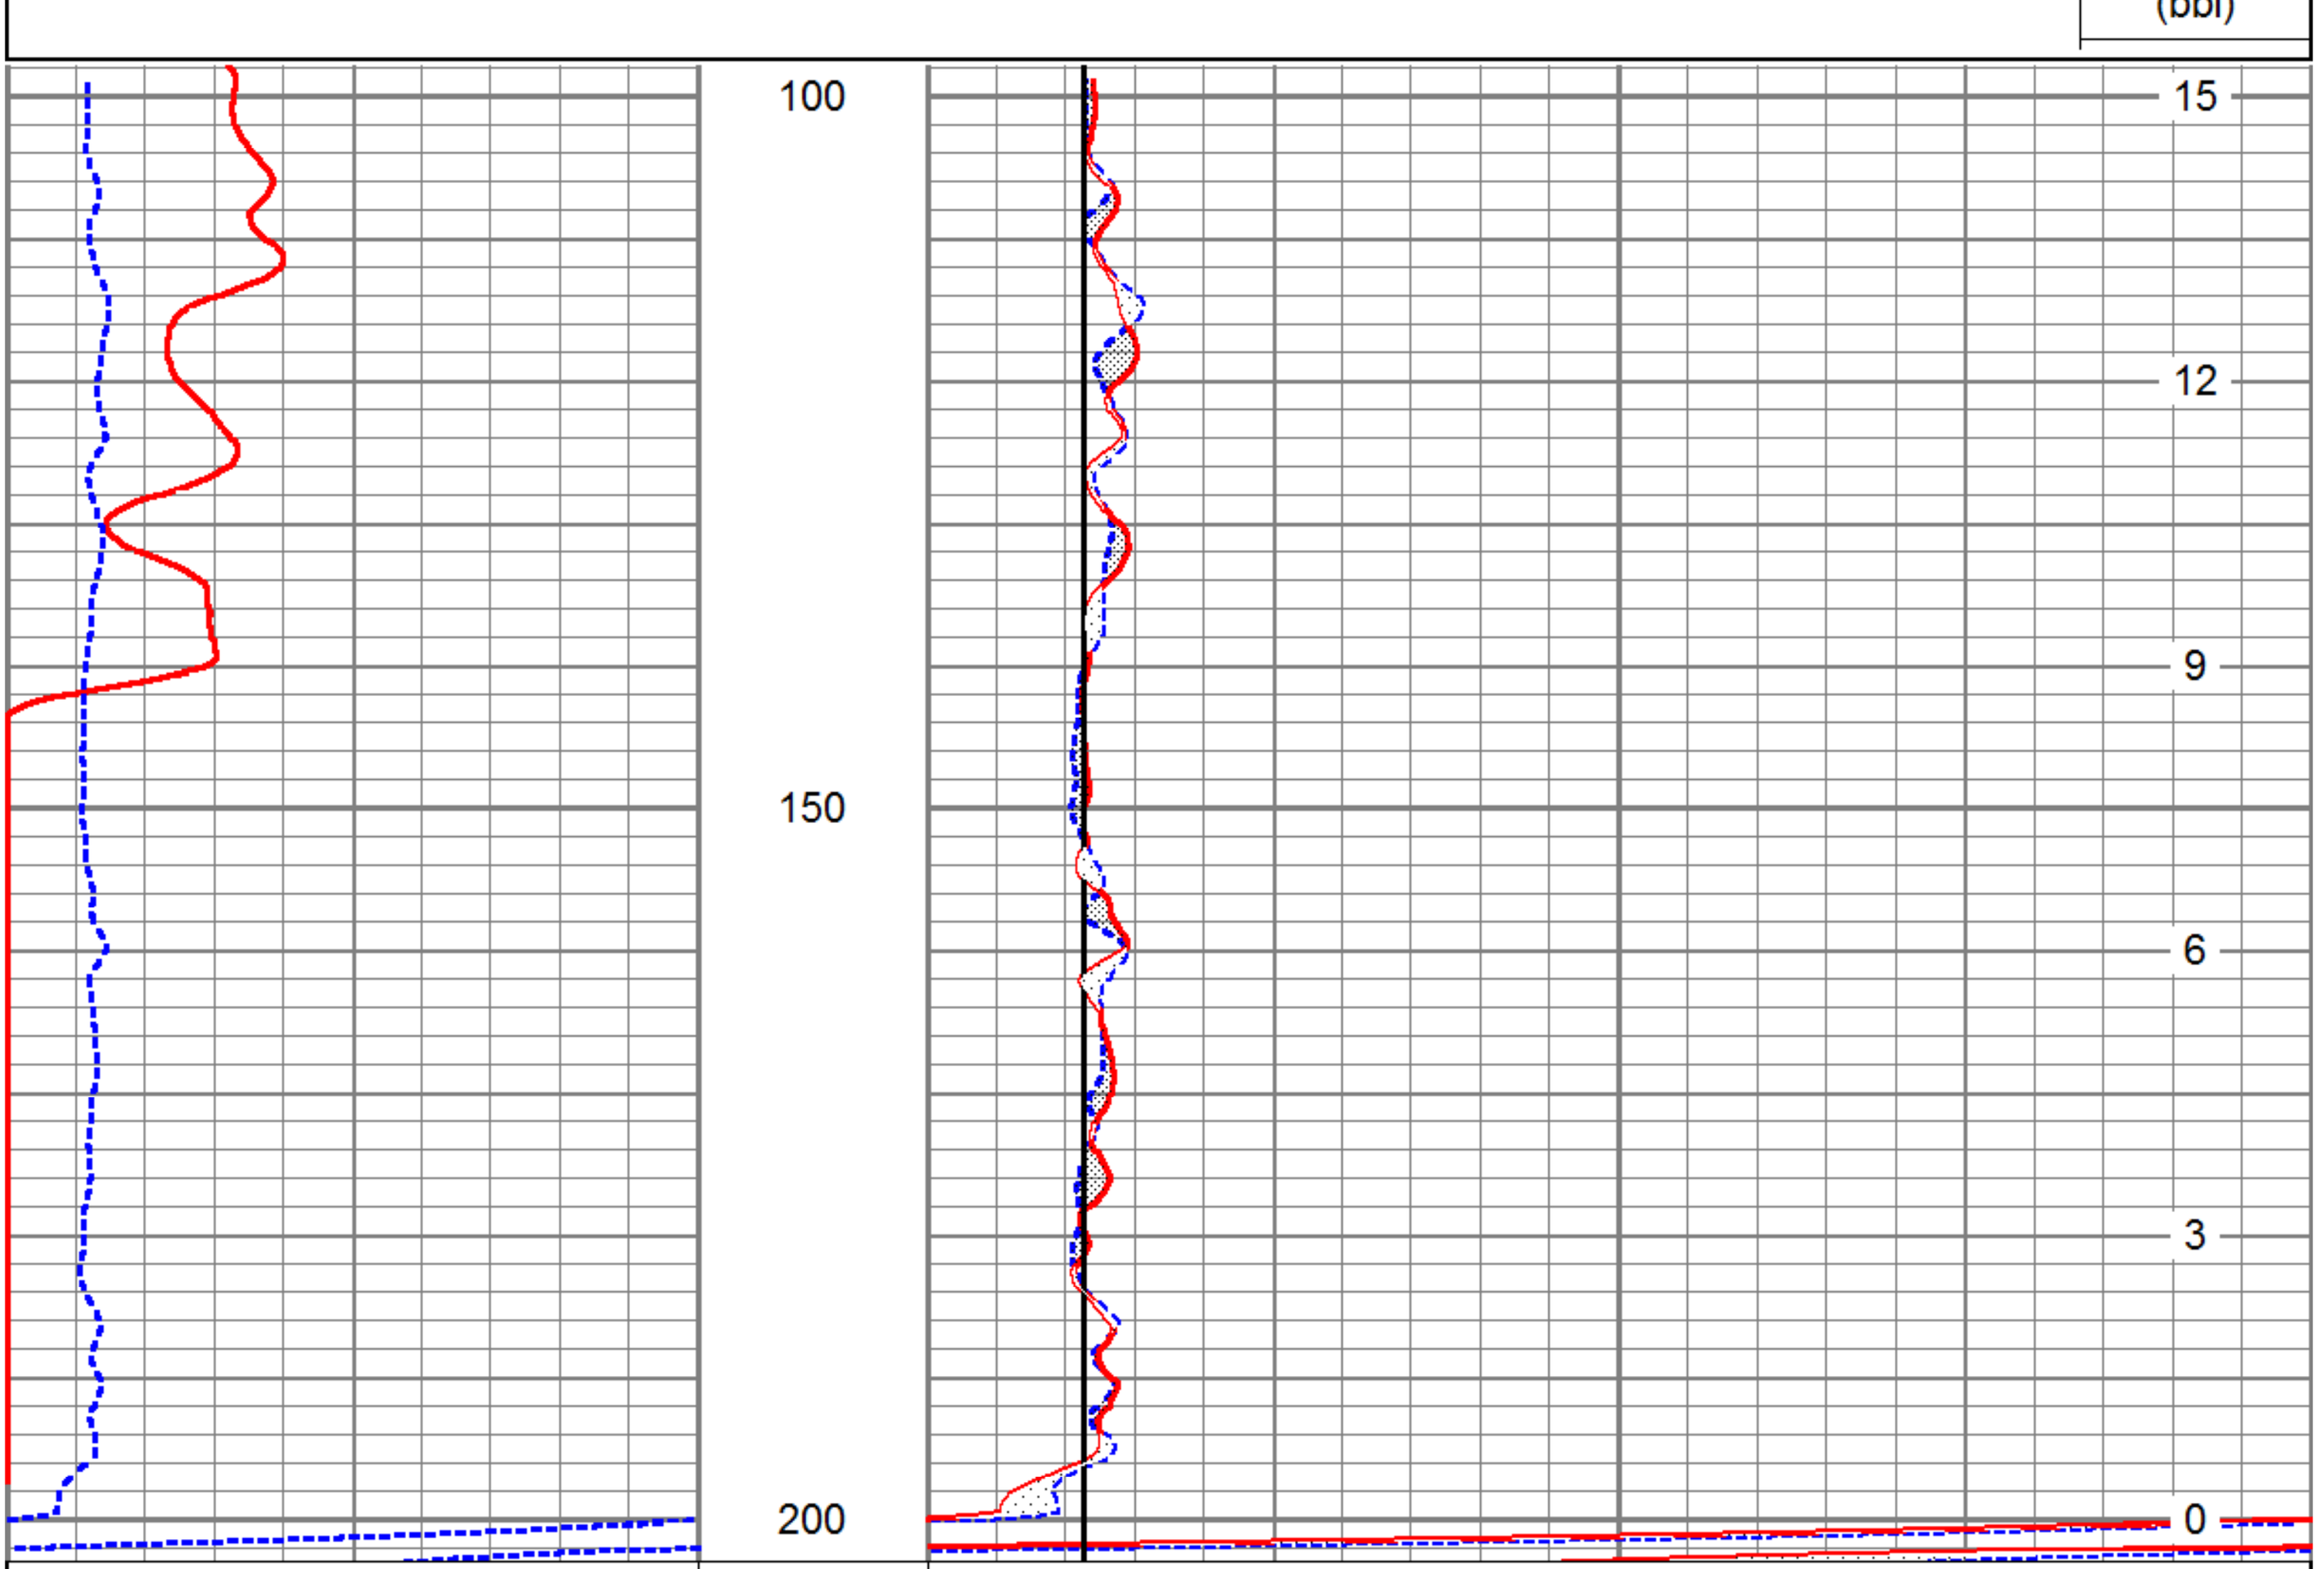

0 Gamma Ray (api) (GAPI) 100
10 Caliper Average (in) (in) 30
10 Y-Caliper (in) (in) 30
10 X-Caliper (in) (in) 30
10 Borehole ID (in) (in) 30
TBHV (bbl)

Calibration Report

Database File: fkaapw2.db
Dataset Pathname: XYCMP
Dataset Creation: Thu Sep 04 08:53:45 2008 by Log Open-Cased 070814

XY Caliper Calibration Report

Serial Number/Model: SDSDEMO-XY
Performed: Thu Sep 04 08:41:21 2008

Ring			X Caliper		Y Caliper	
1:	7.75	in	368.865	cps	348.108	cps
2:	11.75	in	416.739	cps	401.848	cps
3:	42	in	907.027	cps	914.378	cps
4:		in		cps		cps
5:		in		cps		cps
6:		in		cps		cps

Gamma Ray Calibration Report

Serial Number: SDS
Tool Model: SDSGR
Performed: Sat Aug 30 08:06:45 2008

Calibrator Value: 120.0 GAPI

Background Reading: 85.9 cps
Calibrator Reading: 869.9 cps

Sensitivity: 0.1531 GAPI/cps

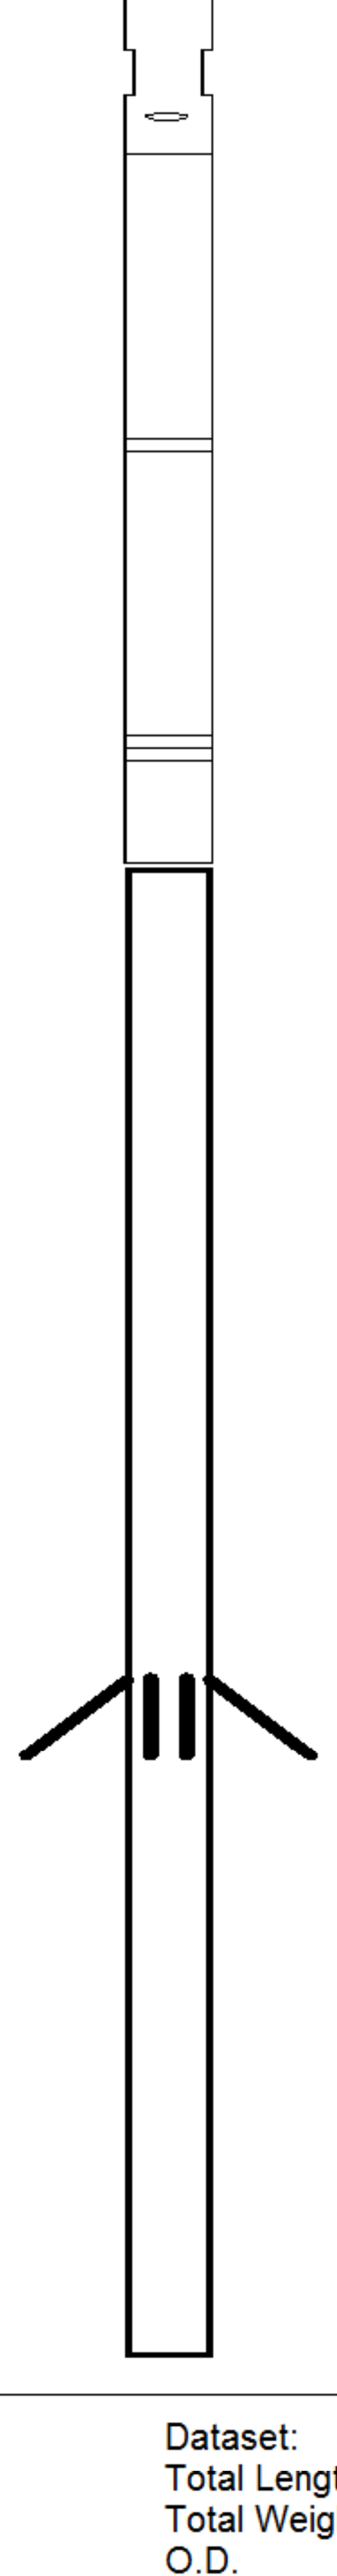

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
			CHD-SDSCHD (SDS) Cable Head	1.00	1.50	5.00
			GR-SDSGR (SDS) PROBE_GR	3.67	3.38	50.00
GR	7.33					
			XYC-XY (SDSDEMO) PROBE_XYC	6.00	3.50	100.00
XCAL	1.00					
YCAL	1.00					

Dataset: fkaapw2.db: field/well/run1/XYCMP
Total Length: 10.67 ft
Total Weight: 155.00 lb
O.D. 3.50 in