MV Geophysical

BOREHOLE COMPENSATED
SONIC
w/ VARIABLE DENSITY
LOG

Company Florida Design Drilling Corp.
Well PW-2
Field Davie
County Broward
State/Prv Florida

Company	Florida Design Drilling Corp.
Well	PW-2
Field	Davie
County	Broward
State/Prv	Florida

Location
Production Wellfield Expansion
Town of Davie - UF Test Site
AECOM

Other Services
XY/GR,DIL
FCT,FLOW
BHC,CBL

			Elevation
Permanent Datum	G.L.	Elevation	K.B.
Log Measured From	G.L.		D.F.
Drilling Measured From	G.L.		G.L.

Date	30-JUL-2012		
Run Number	THREE		
Depth Driller	1575'		
Depth Logger	1574'		
Bottom Logged Interval	1566'		
Top Log Interval	935'		
Open Hole Size	14.75"/9.875"		
Type Fluid	H2O		
Density / Viscosity	na/na		
Max. Recorded Temp.	see FCT log		
Estimated Cement Top	SURFACE		
Time Well Ready	10:00 7/30/2012		
Time Logger on Bottom	16:45 7/30/2012		
Equipment Number	MVGS-1		
Location	Ft. Myers		
Recorded By	S.Miller/C.Miller		
Witnessed By	S.English (AECOM)	Rossco (FDD)	

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To
ONE	41"	46'	253'				
TWO	12.25"	250'	1100'				
THREE	15"	962'	1100'				
FOUR	9.875"	1100'	1575'				

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	42"	0.375" WT	SURFACE	50'
Prot. String	30"	0.375" WT	SURFACE	250'
Production String	16" FRP	15.875" ID	SURFACE	962'
Liner				
Invoice No.	2012156	fddavie2.db	8fnl/4fld/.pdf/.las	* Final Print *

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Sonic Porosity was run on a Limestone Matrix (=47.5)

BHC Sonic Tool is run centralized.

MV
Geophysical

MAIN PASS

Database File:	fddavie2.db
Dataset Pathname:	run3/MAIN
Presentation Format:	dtg-11
Dataset Creation:	Mon Jul 30 11:57:05 2012
Charted by:	Depth in Feet scaled 1:1200

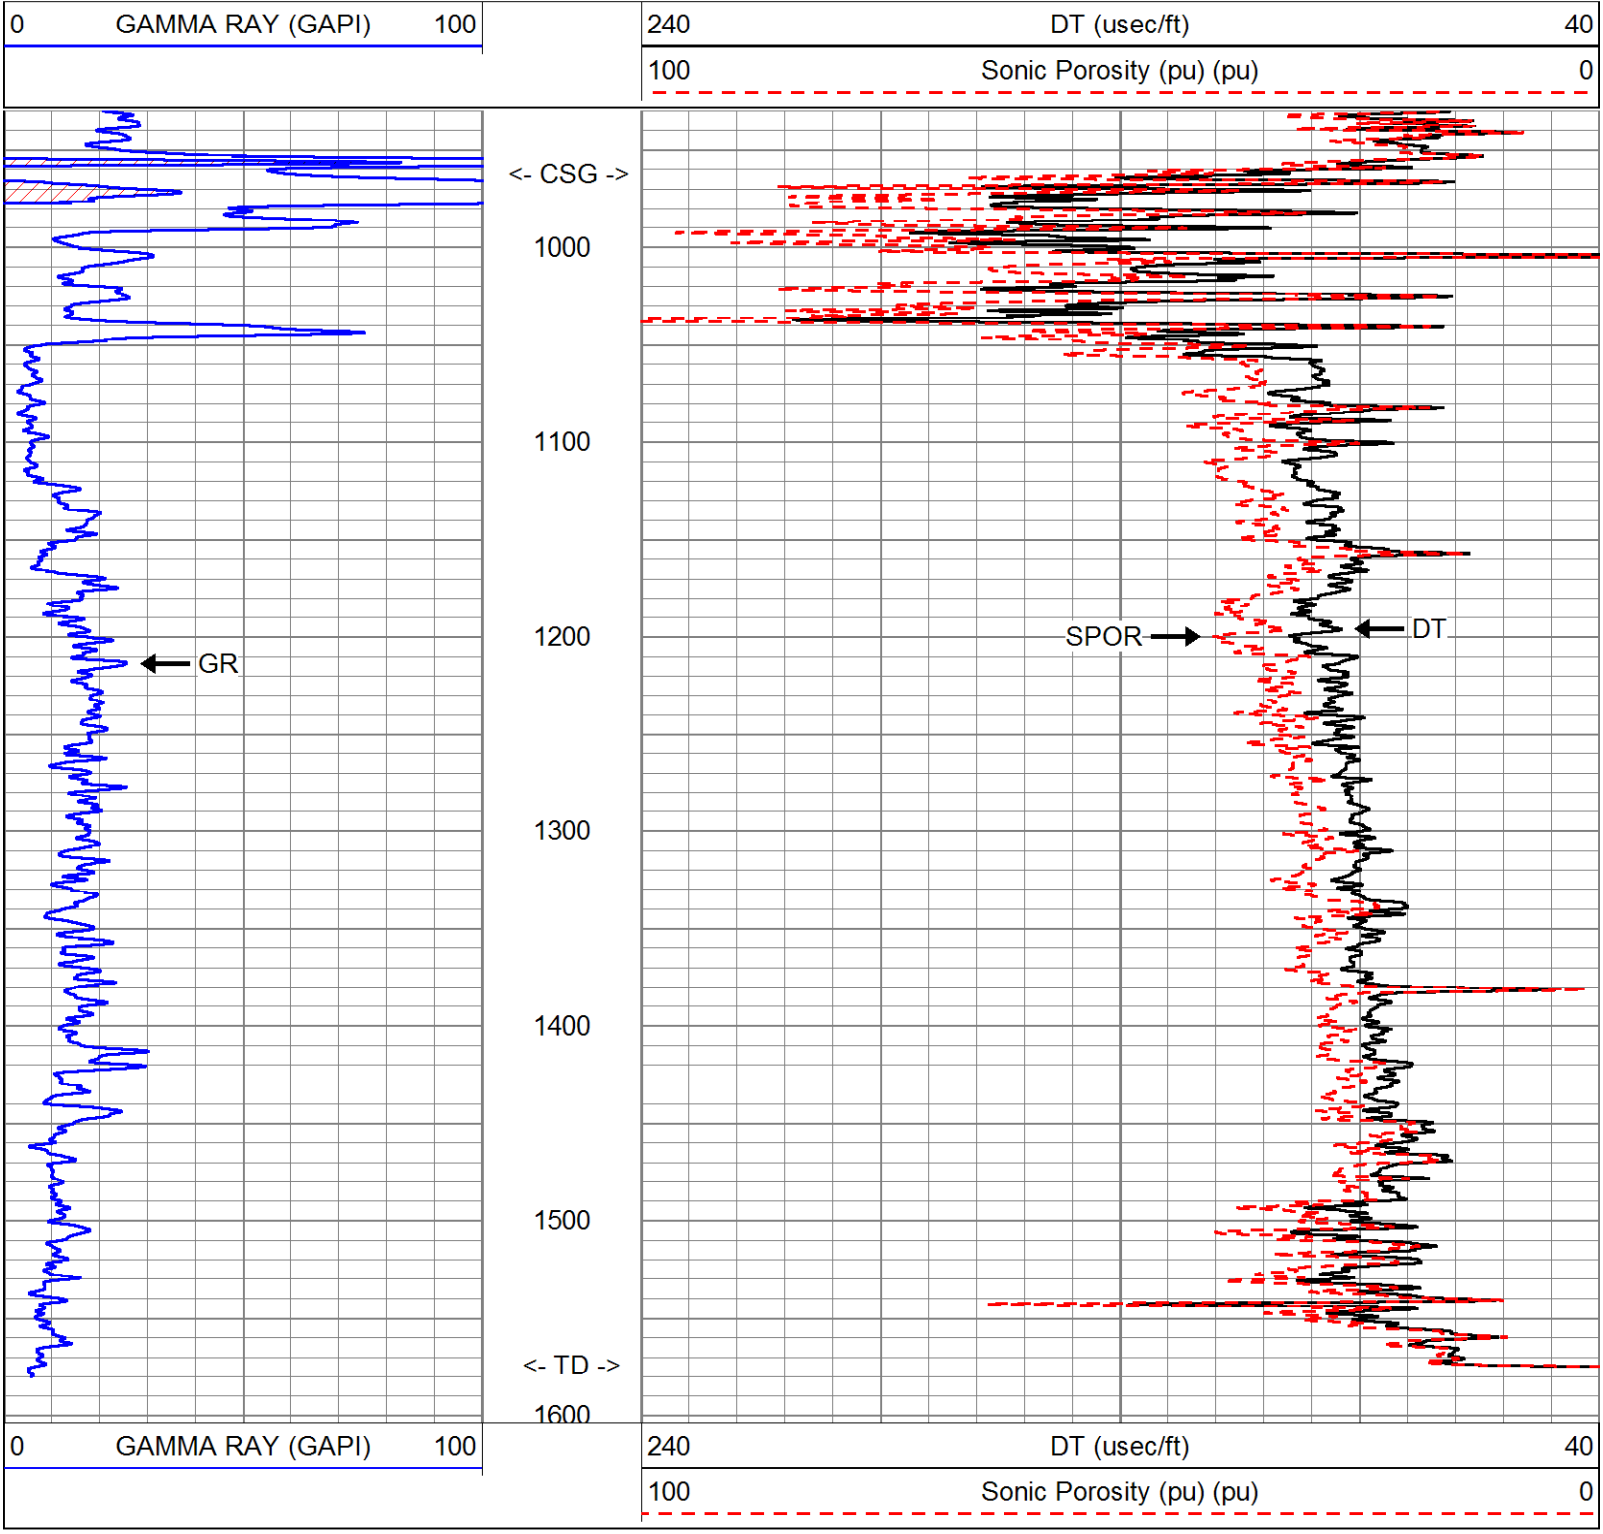

MV Geophysical

MAIN PASS

Database File:	fddavie2.db
Dataset Pathname:	run3/MAIN
Presentation Format:	dtxy525g
Dataset Creation:	Mon Jul 30 11:57:05 2012
Charted by:	Depth in Feet scaled 1:600

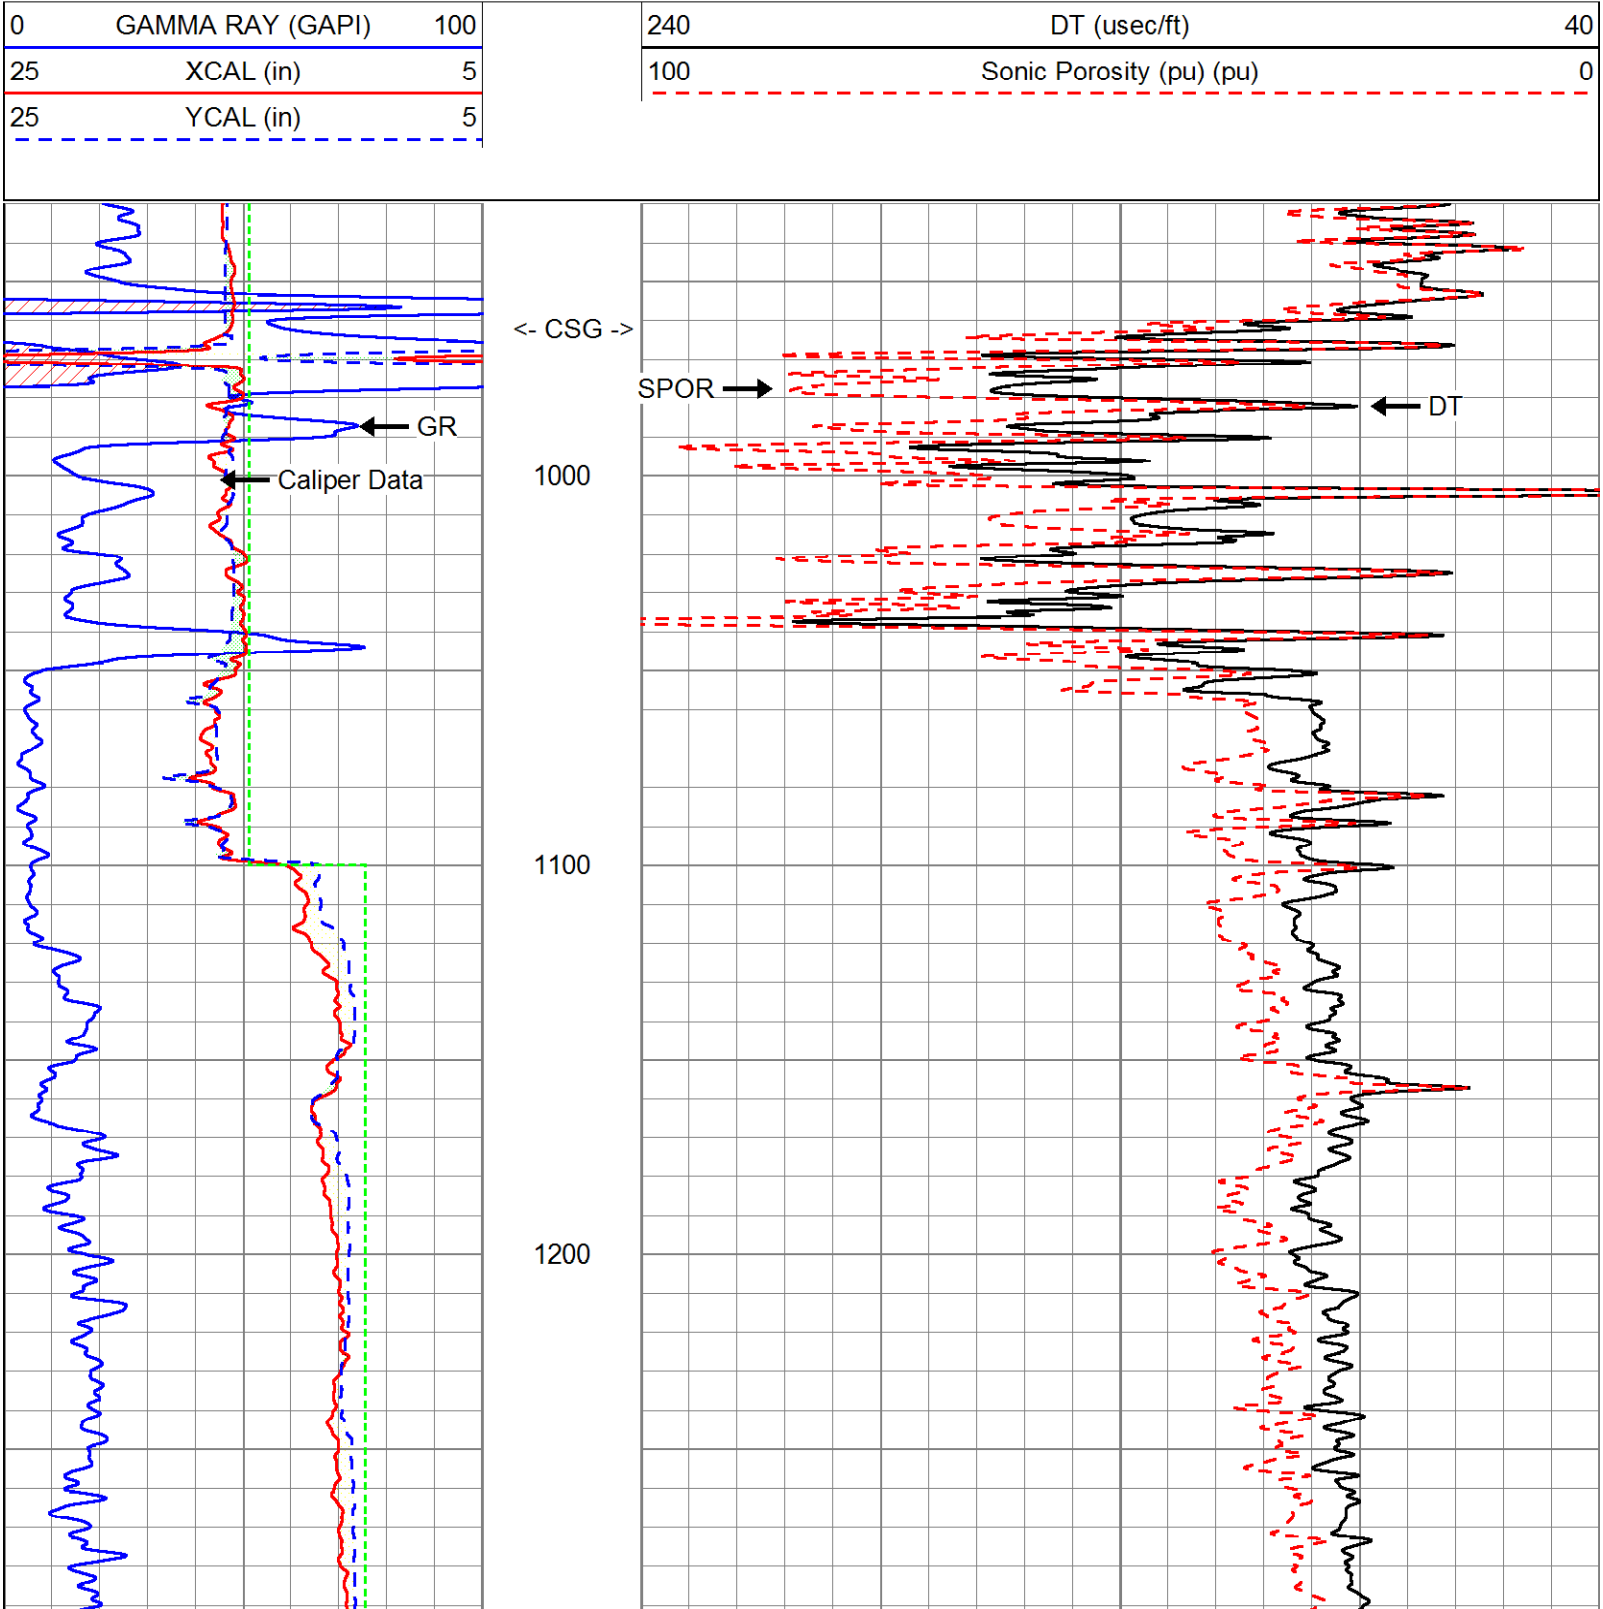

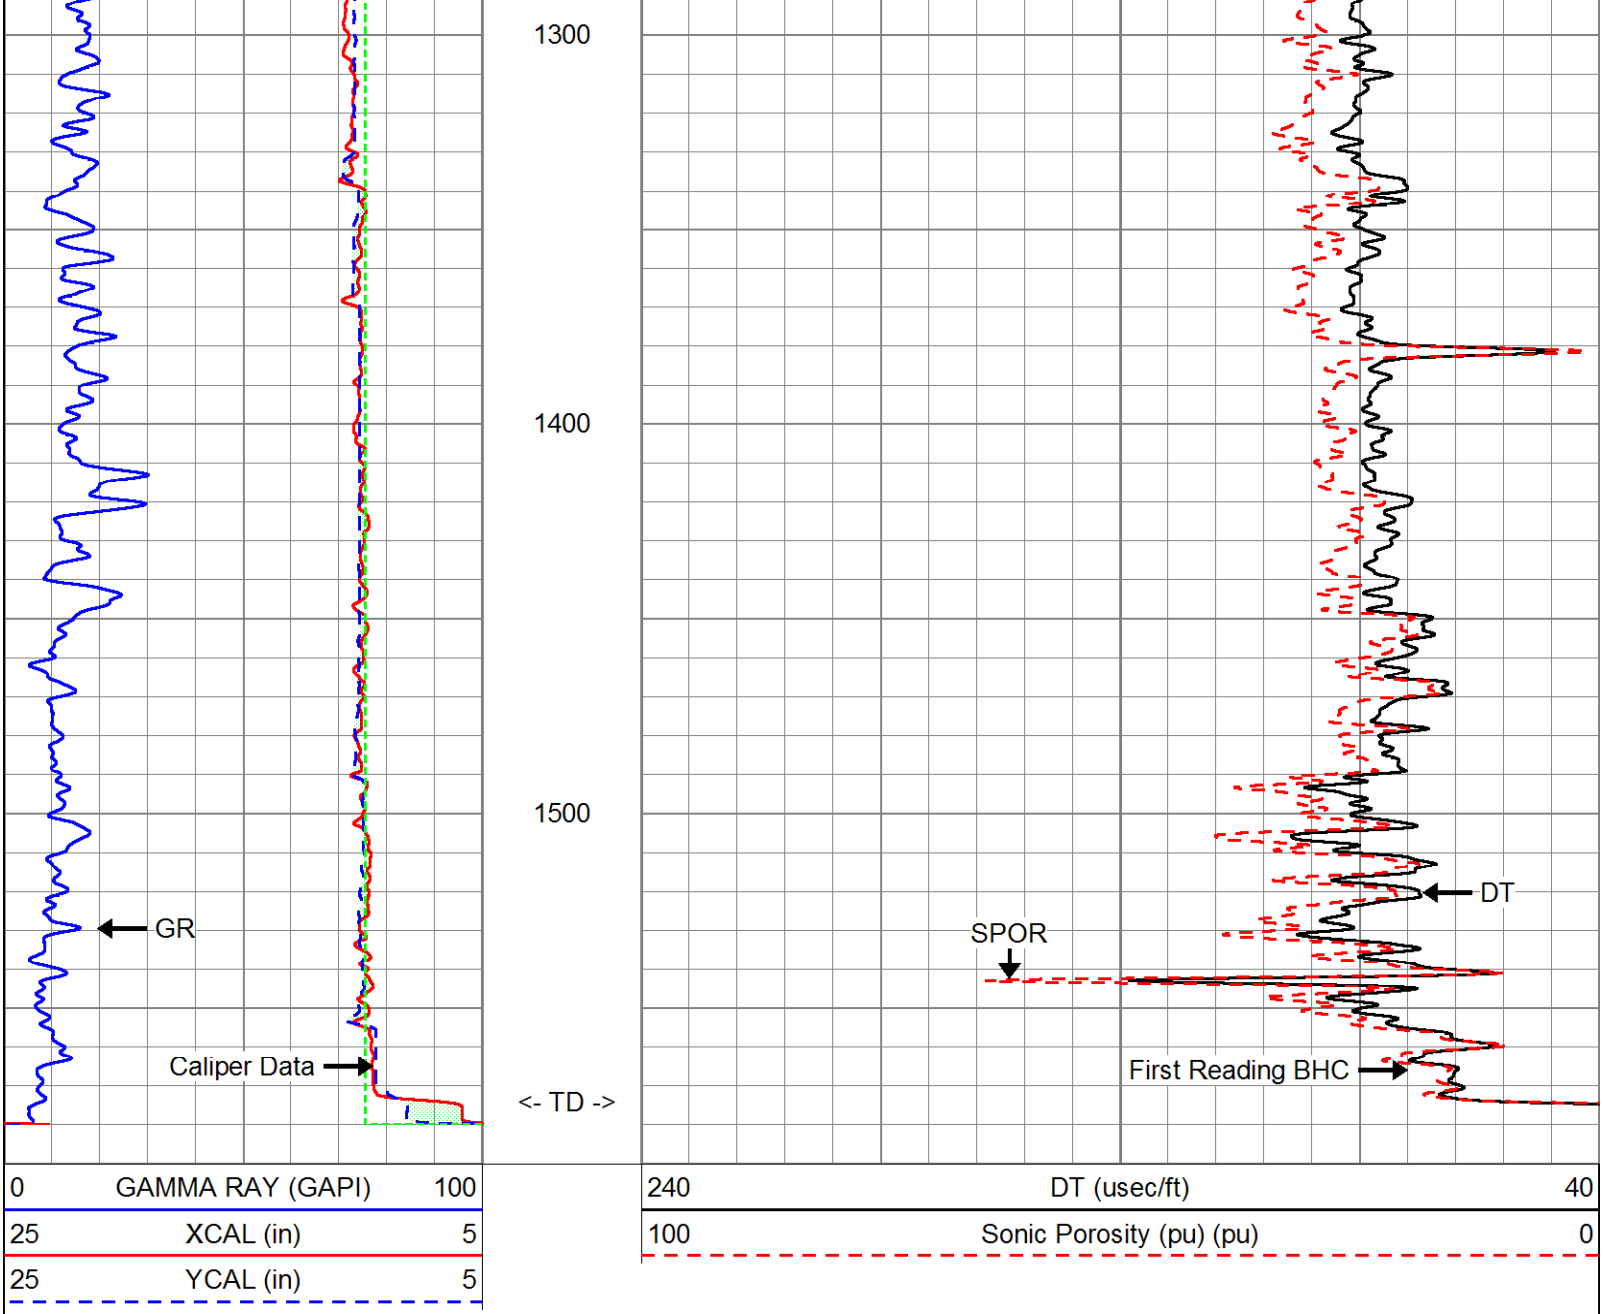

MV
Geophysical

MAIN PASS

Database File:	fddavie2.db
Dataset Pathname:	run3/MAIN
Presentation Format:	dtxy525g
Dataset Creation:	Mon Jul 30 11:57:05 2012
Charted by:	Depth in Feet scaled 1:240

0 GAMMA RAY (GAPI) 100
25 XCAL (in) 5
25 YCAL (in) 5

240 DT (usec/ft) 40
100 Sonic Porosity (pu) (pu) 0

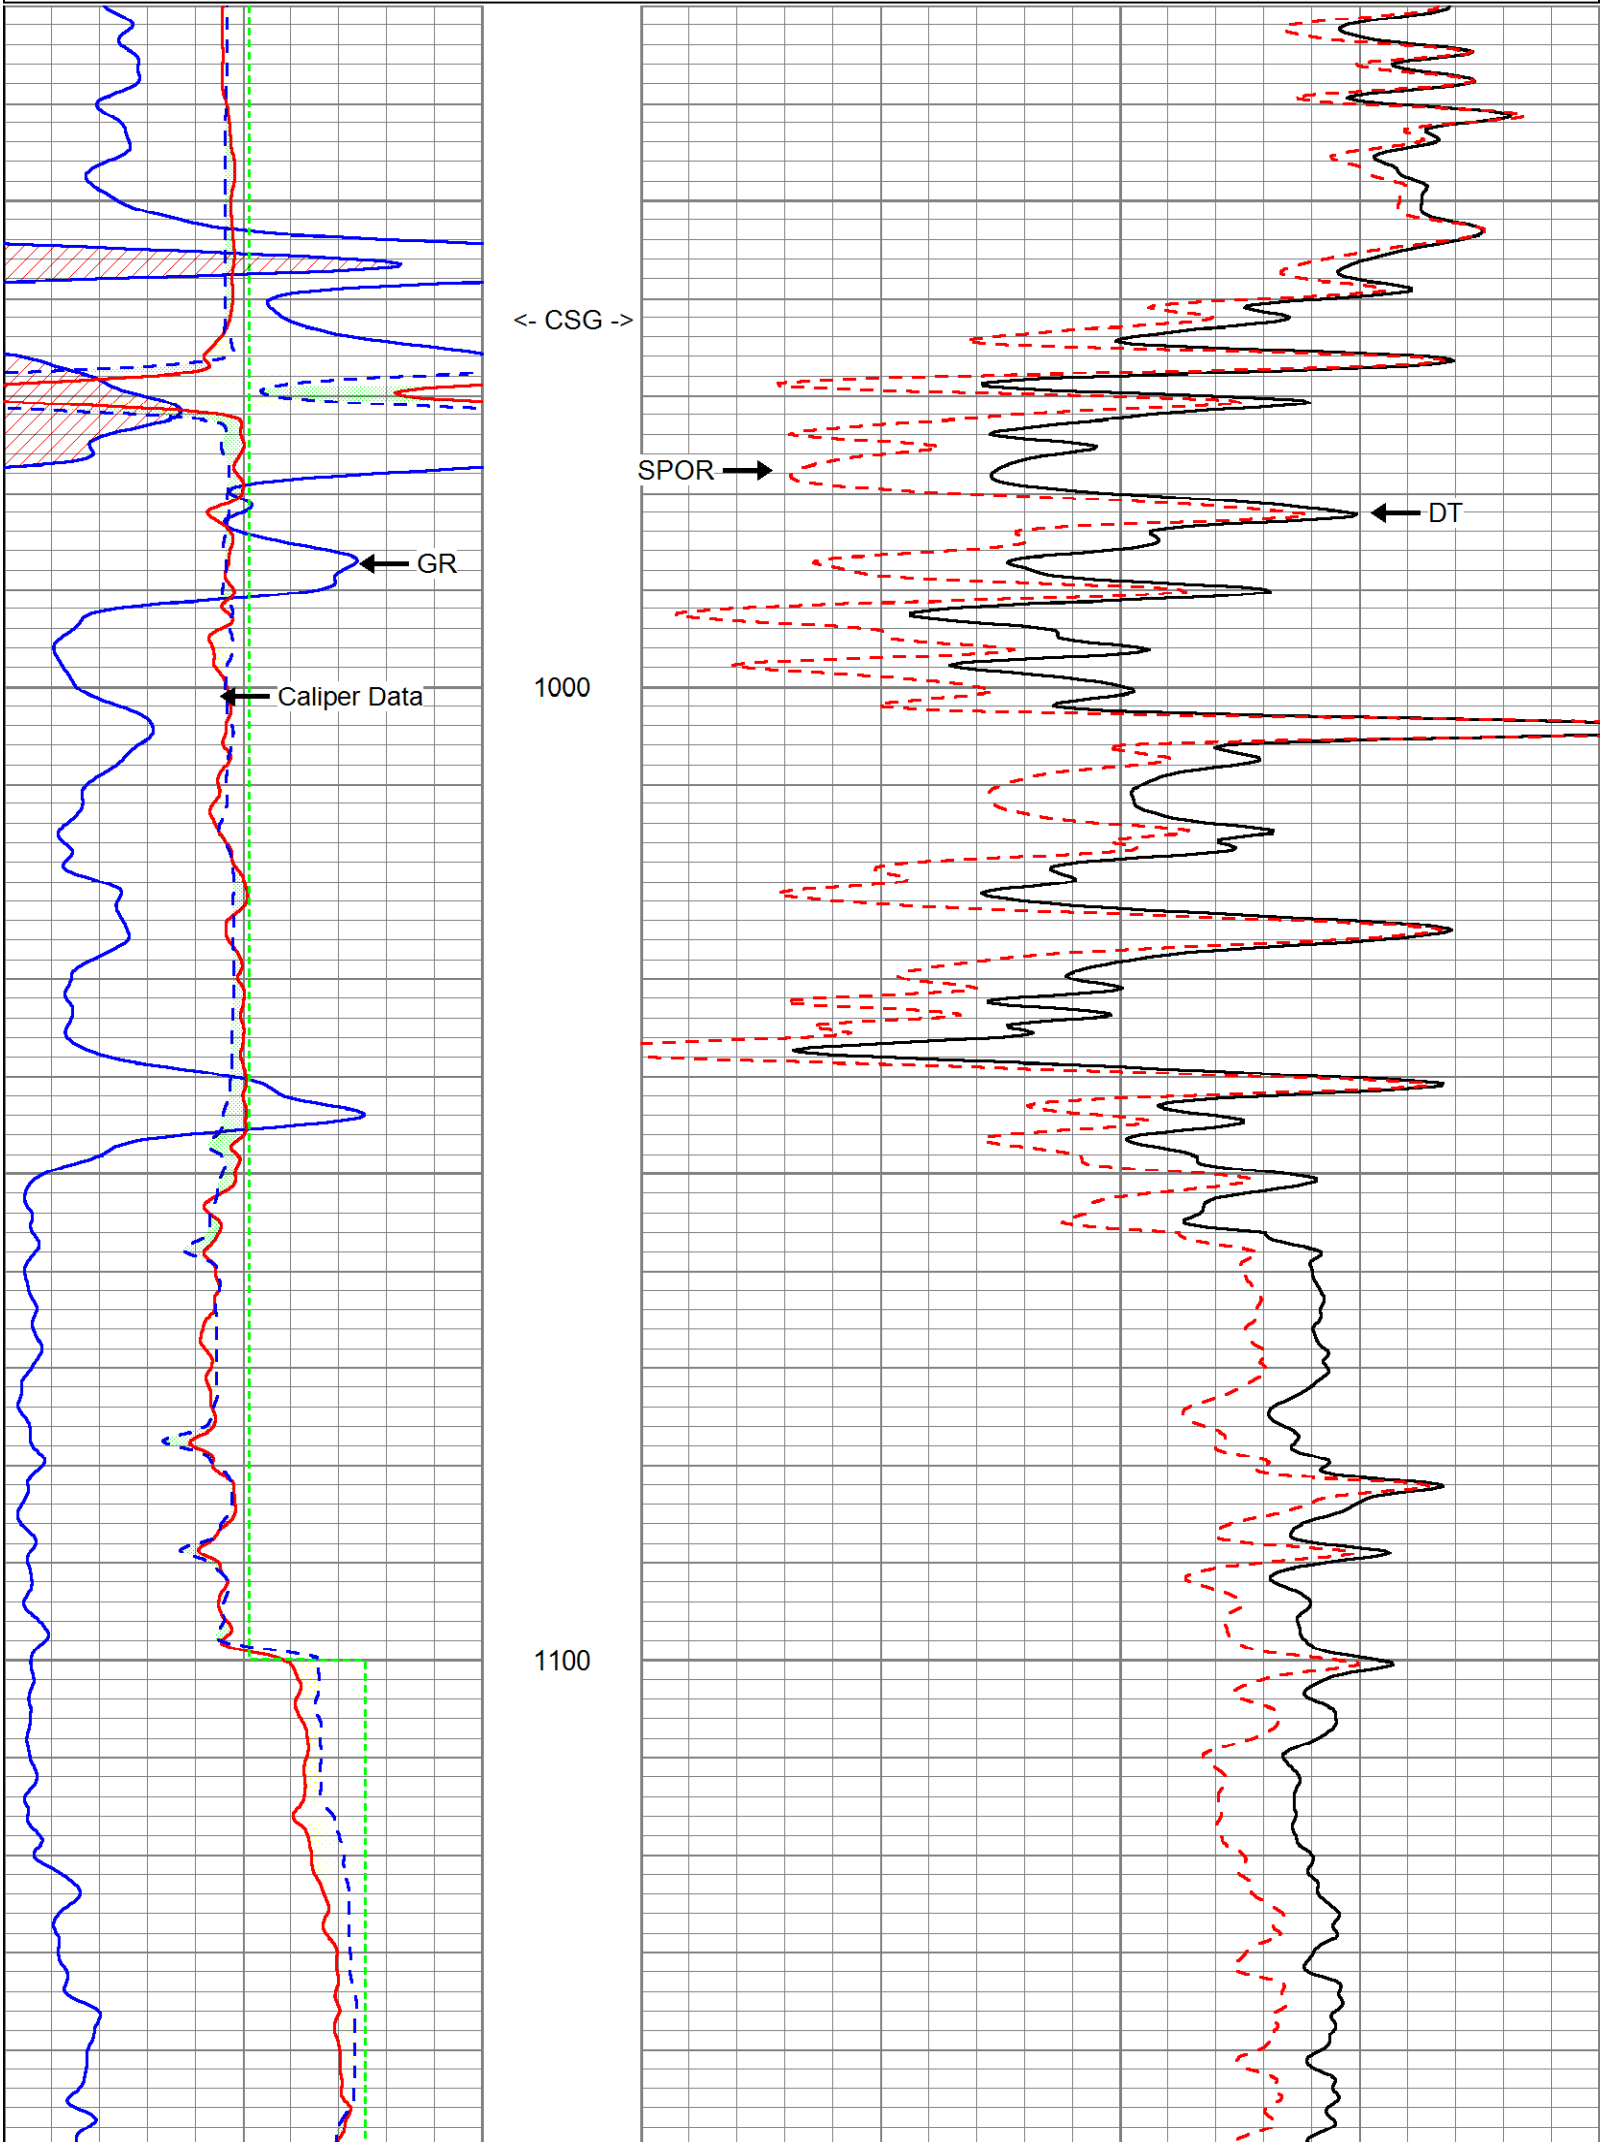

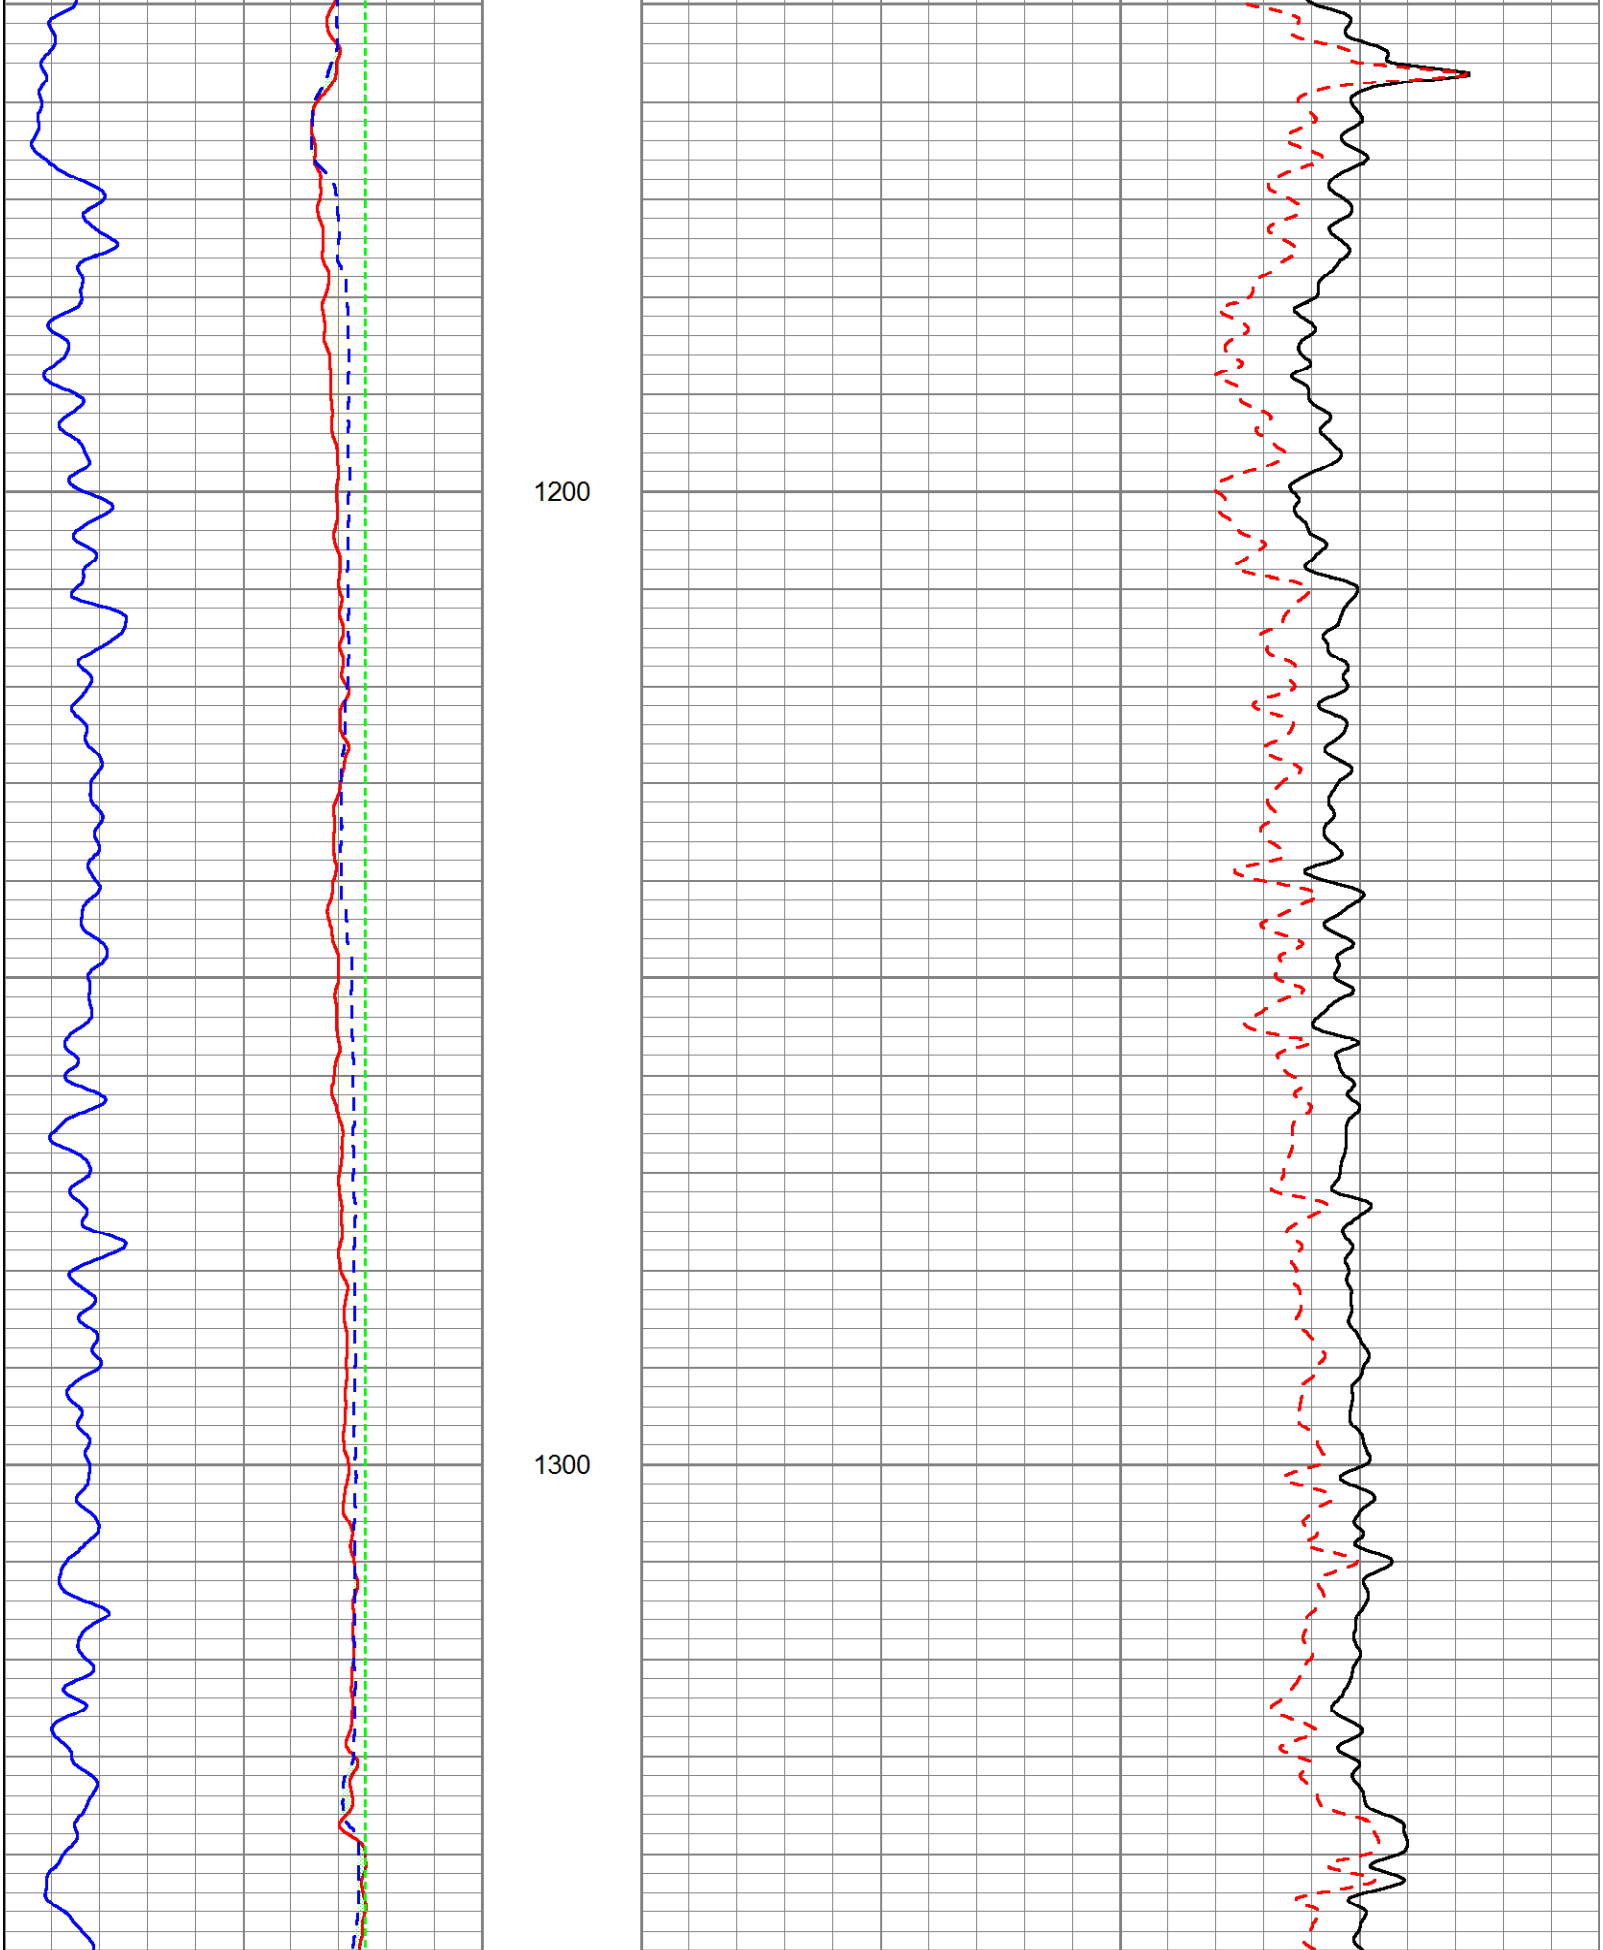

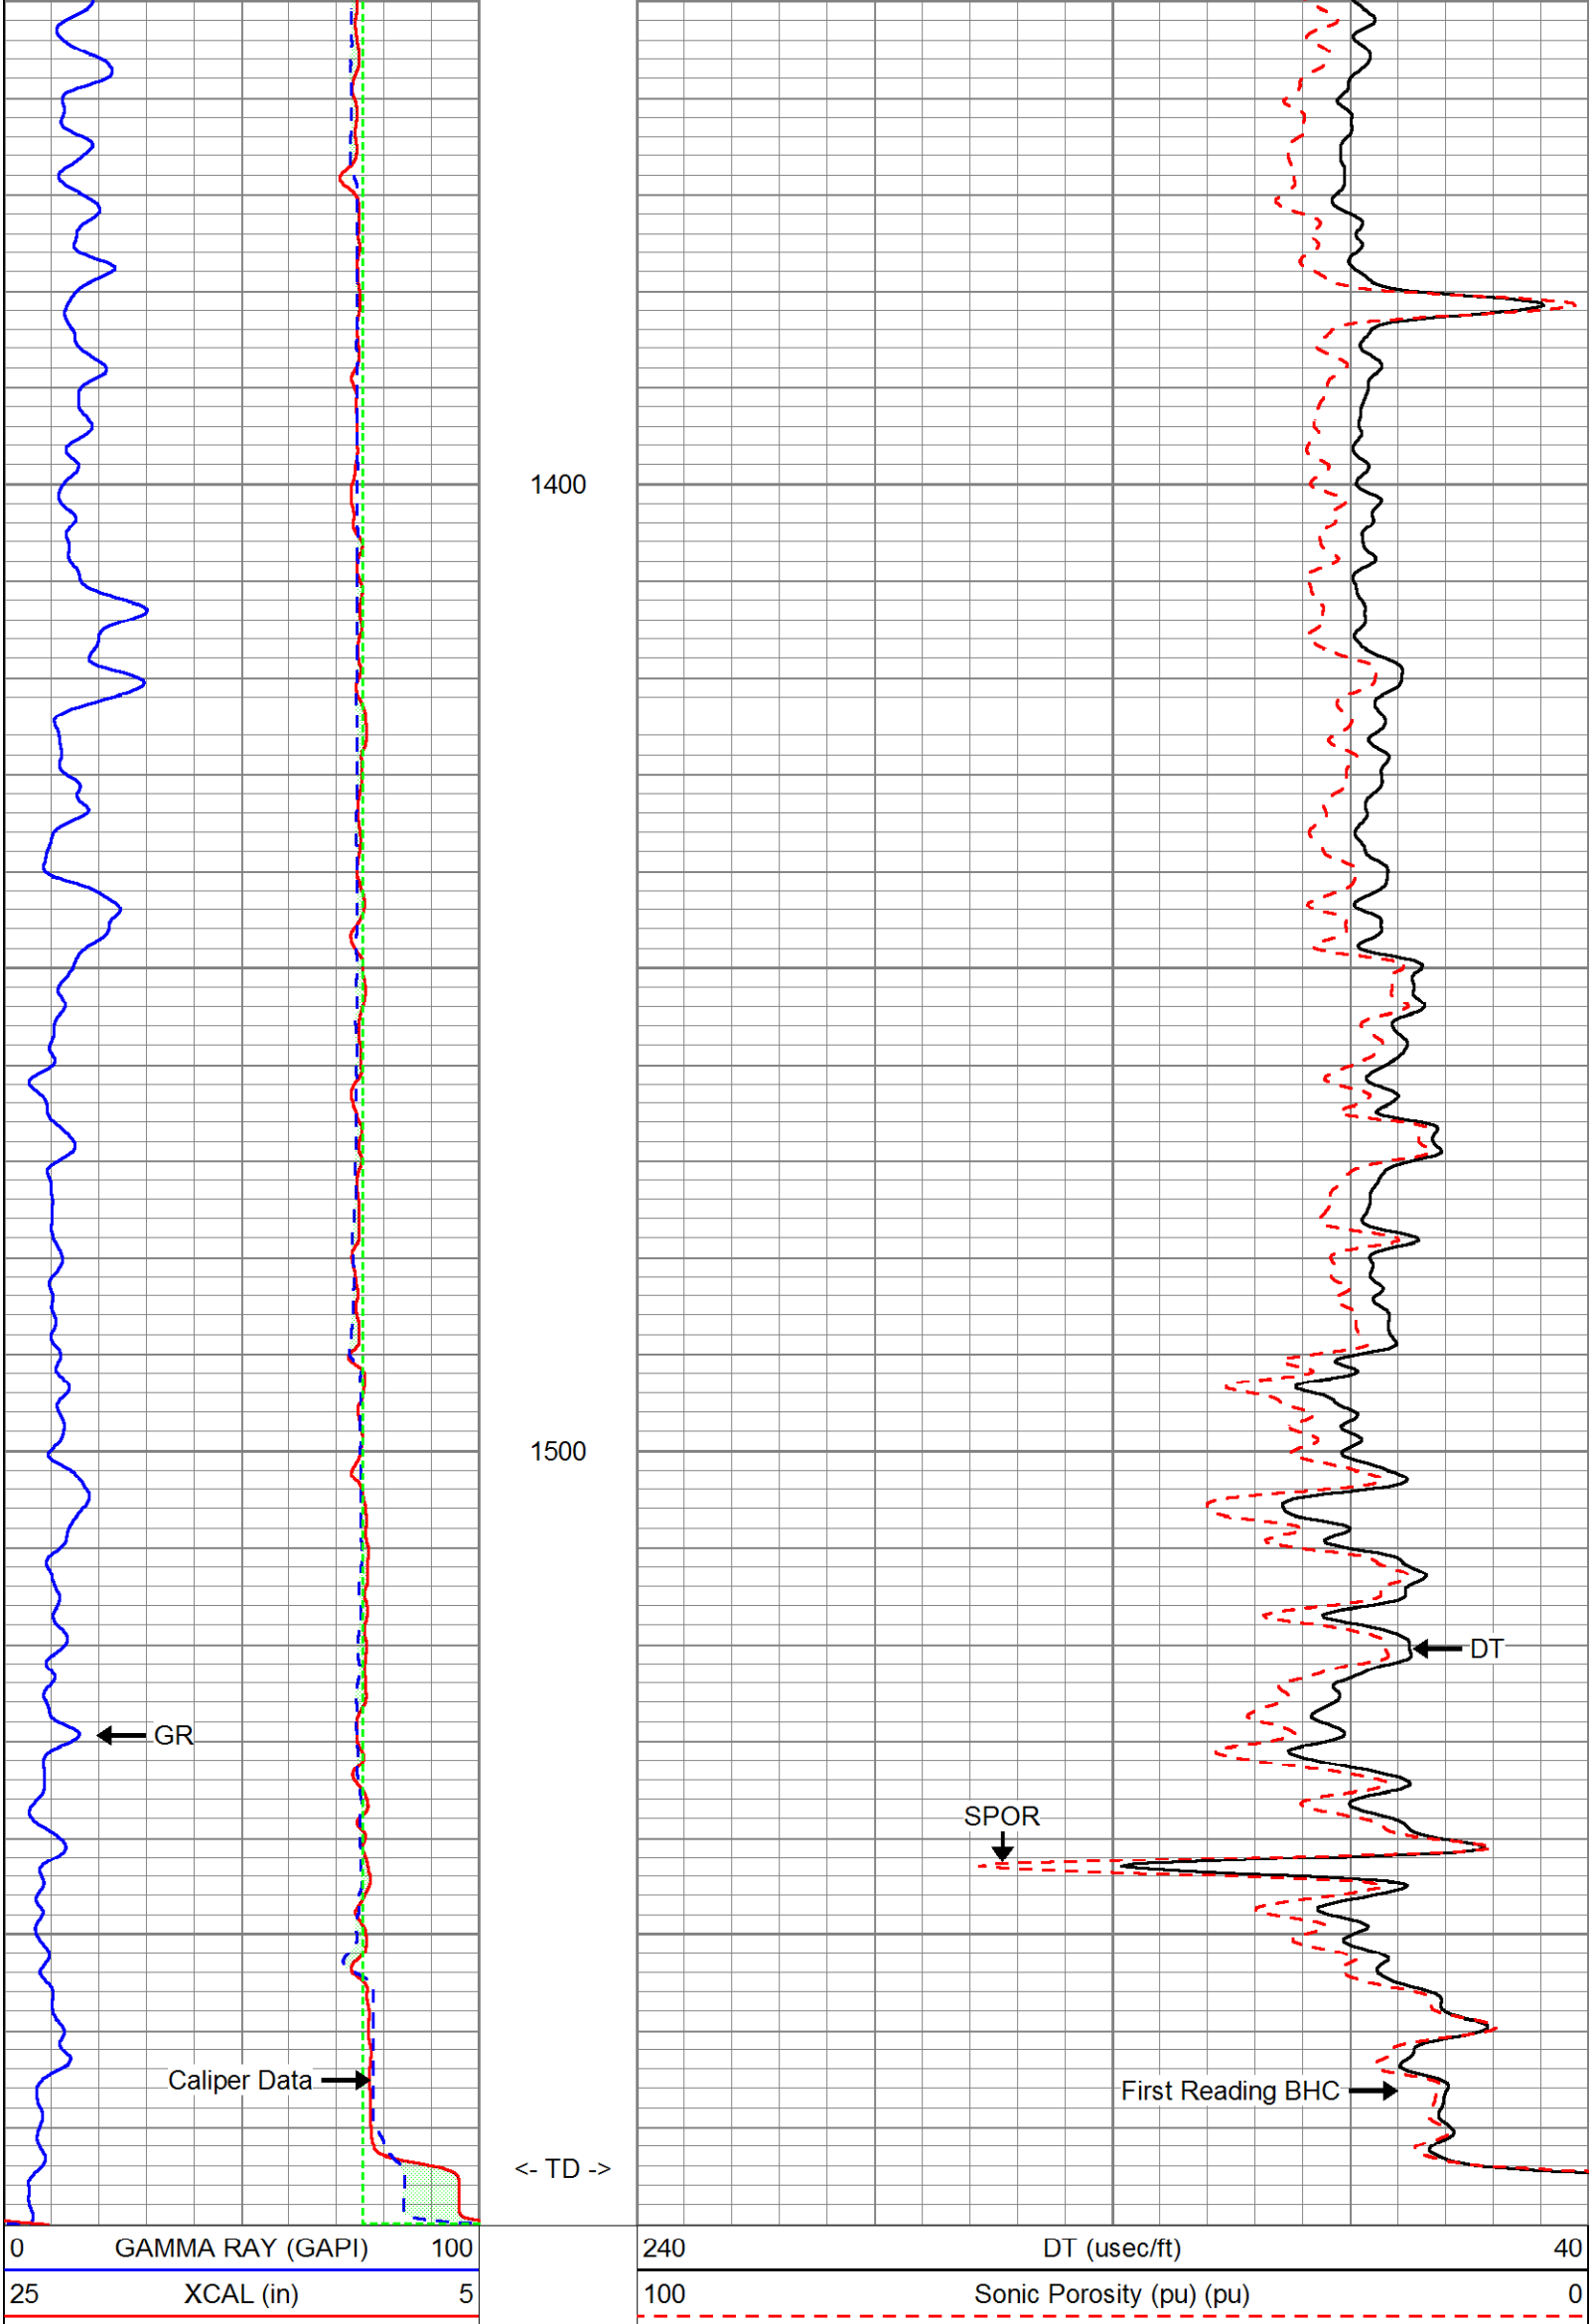

25 YCAL (in) 5

MV
Geophysical

MAIN PASS

Database File:	fddavie2.db
Dataset Pathname:	run3/MAIN
Presentation Format:	son_vdl
Dataset Creation:	Mon Jul 30 11:57:05 2012
Charted by:	Depth in Feet scaled 1:240

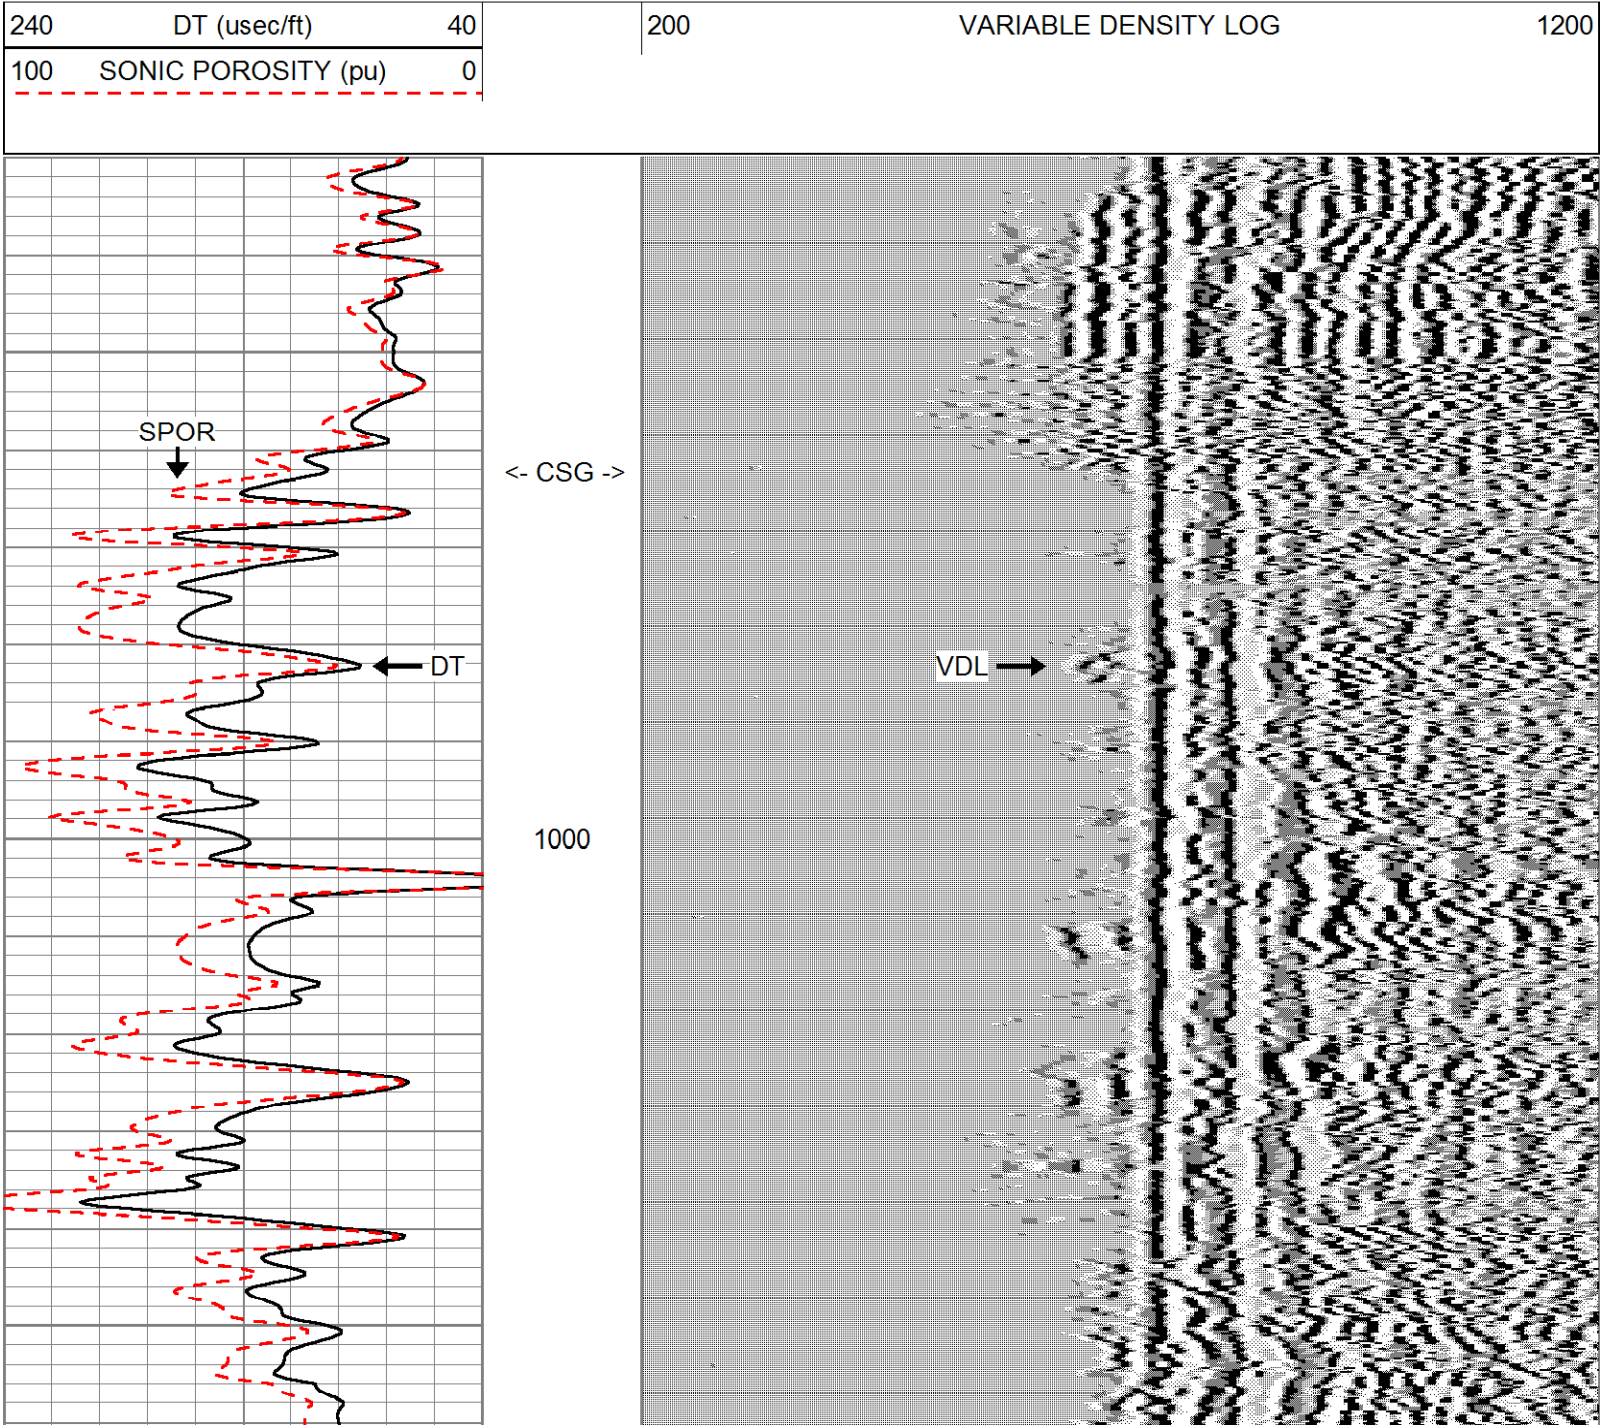

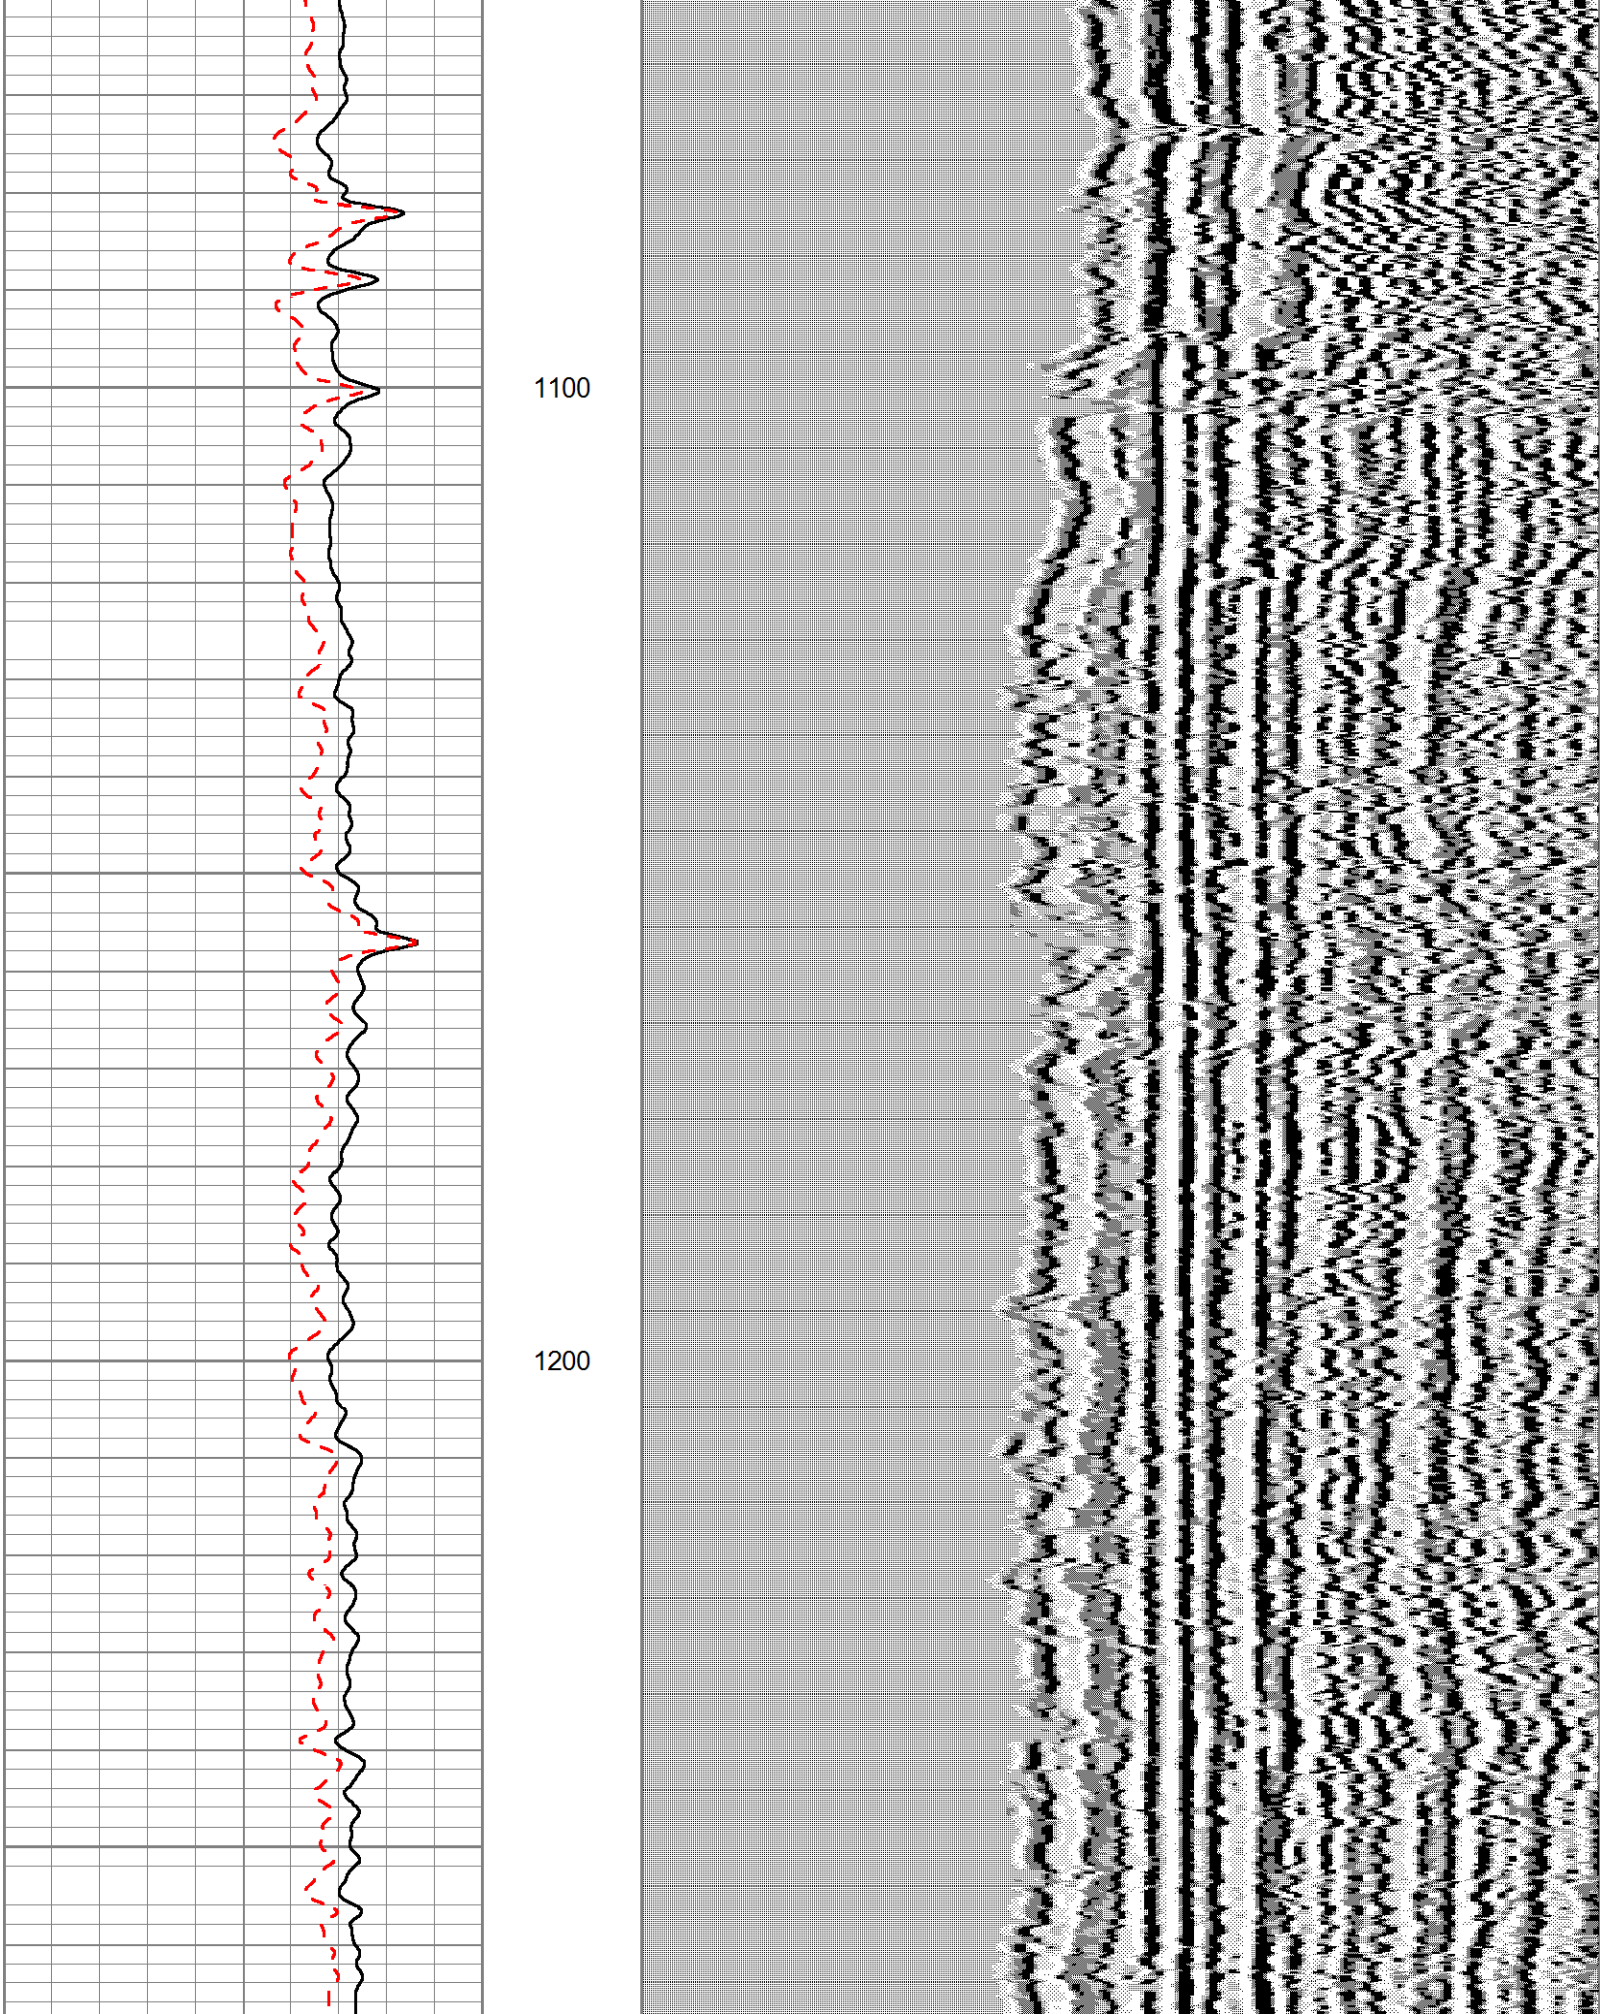

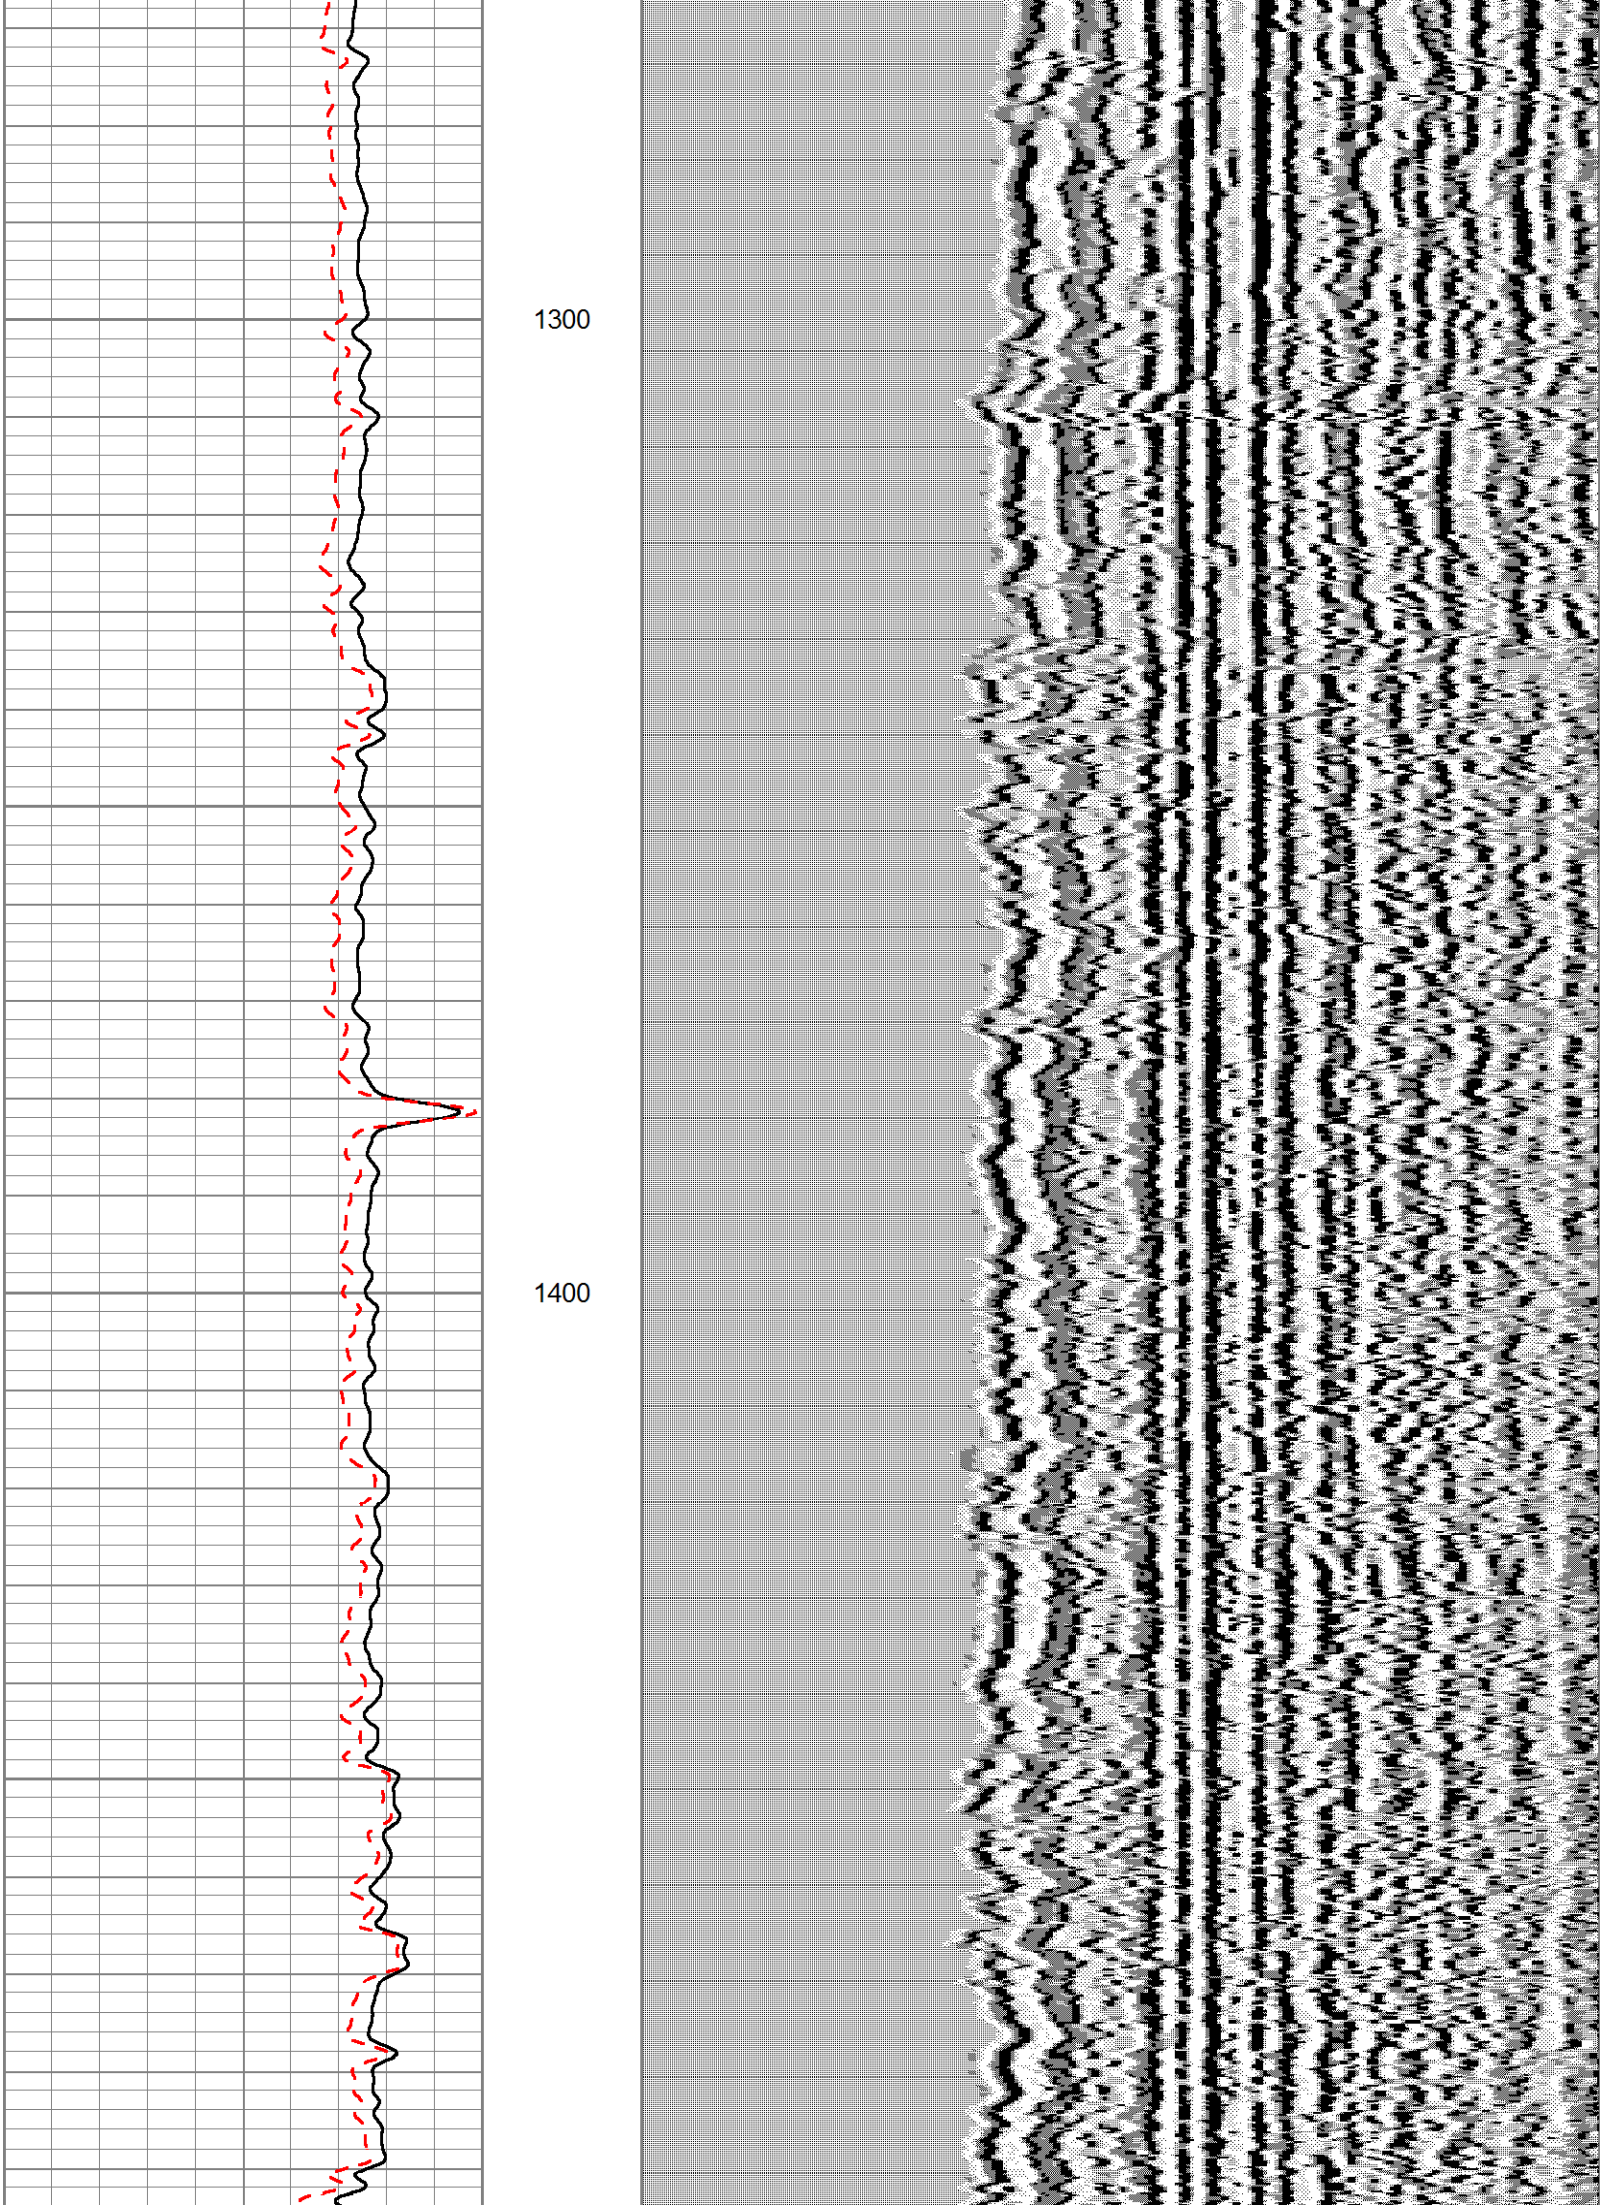

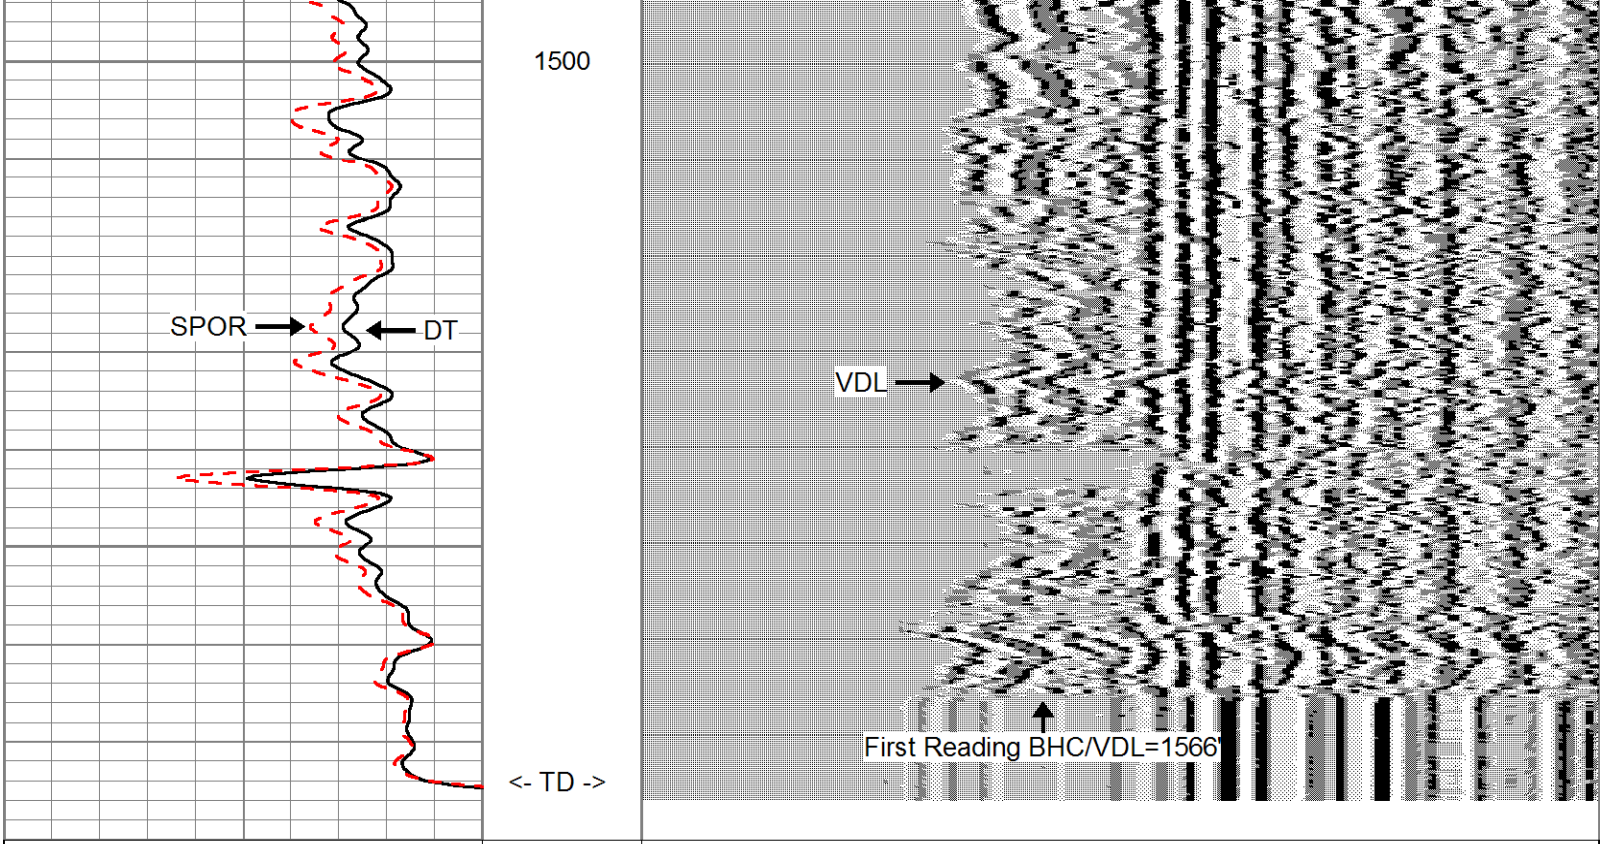

240 DT (usec/ft) 40
100 SONIC POROSITY (pu) 0

200 VARIABLE DENSITY LOG 1200

MV Geophysical

REPEAT SECTION

Database File:	fddavie2.db
Dataset Pathname:	run3/REPEAT
Presentation Format:	son_vdl
Dataset Creation:	Mon Jul 30 12:18:45 2012
Charted by:	Depth in Feet scaled 1:240

240 DT (usec/ft) 40
100 SONIC POROSITY (pu) 0

200 VARIABLE DENSITY LOG 1200

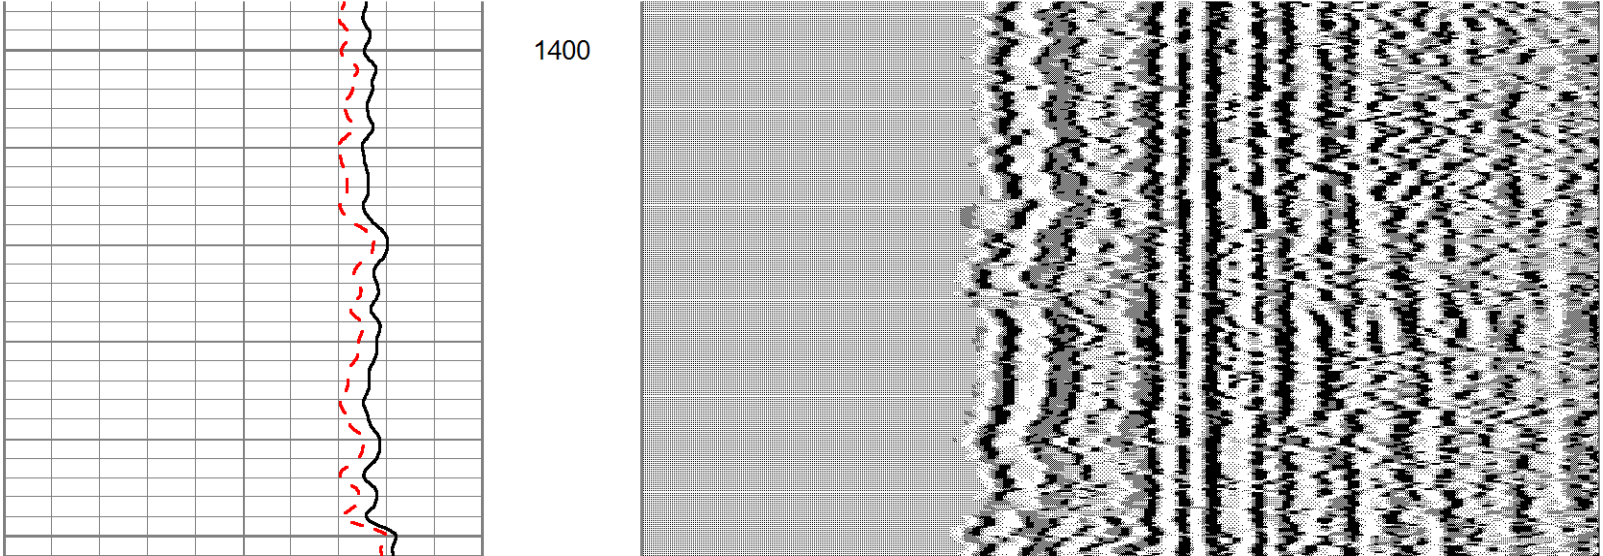

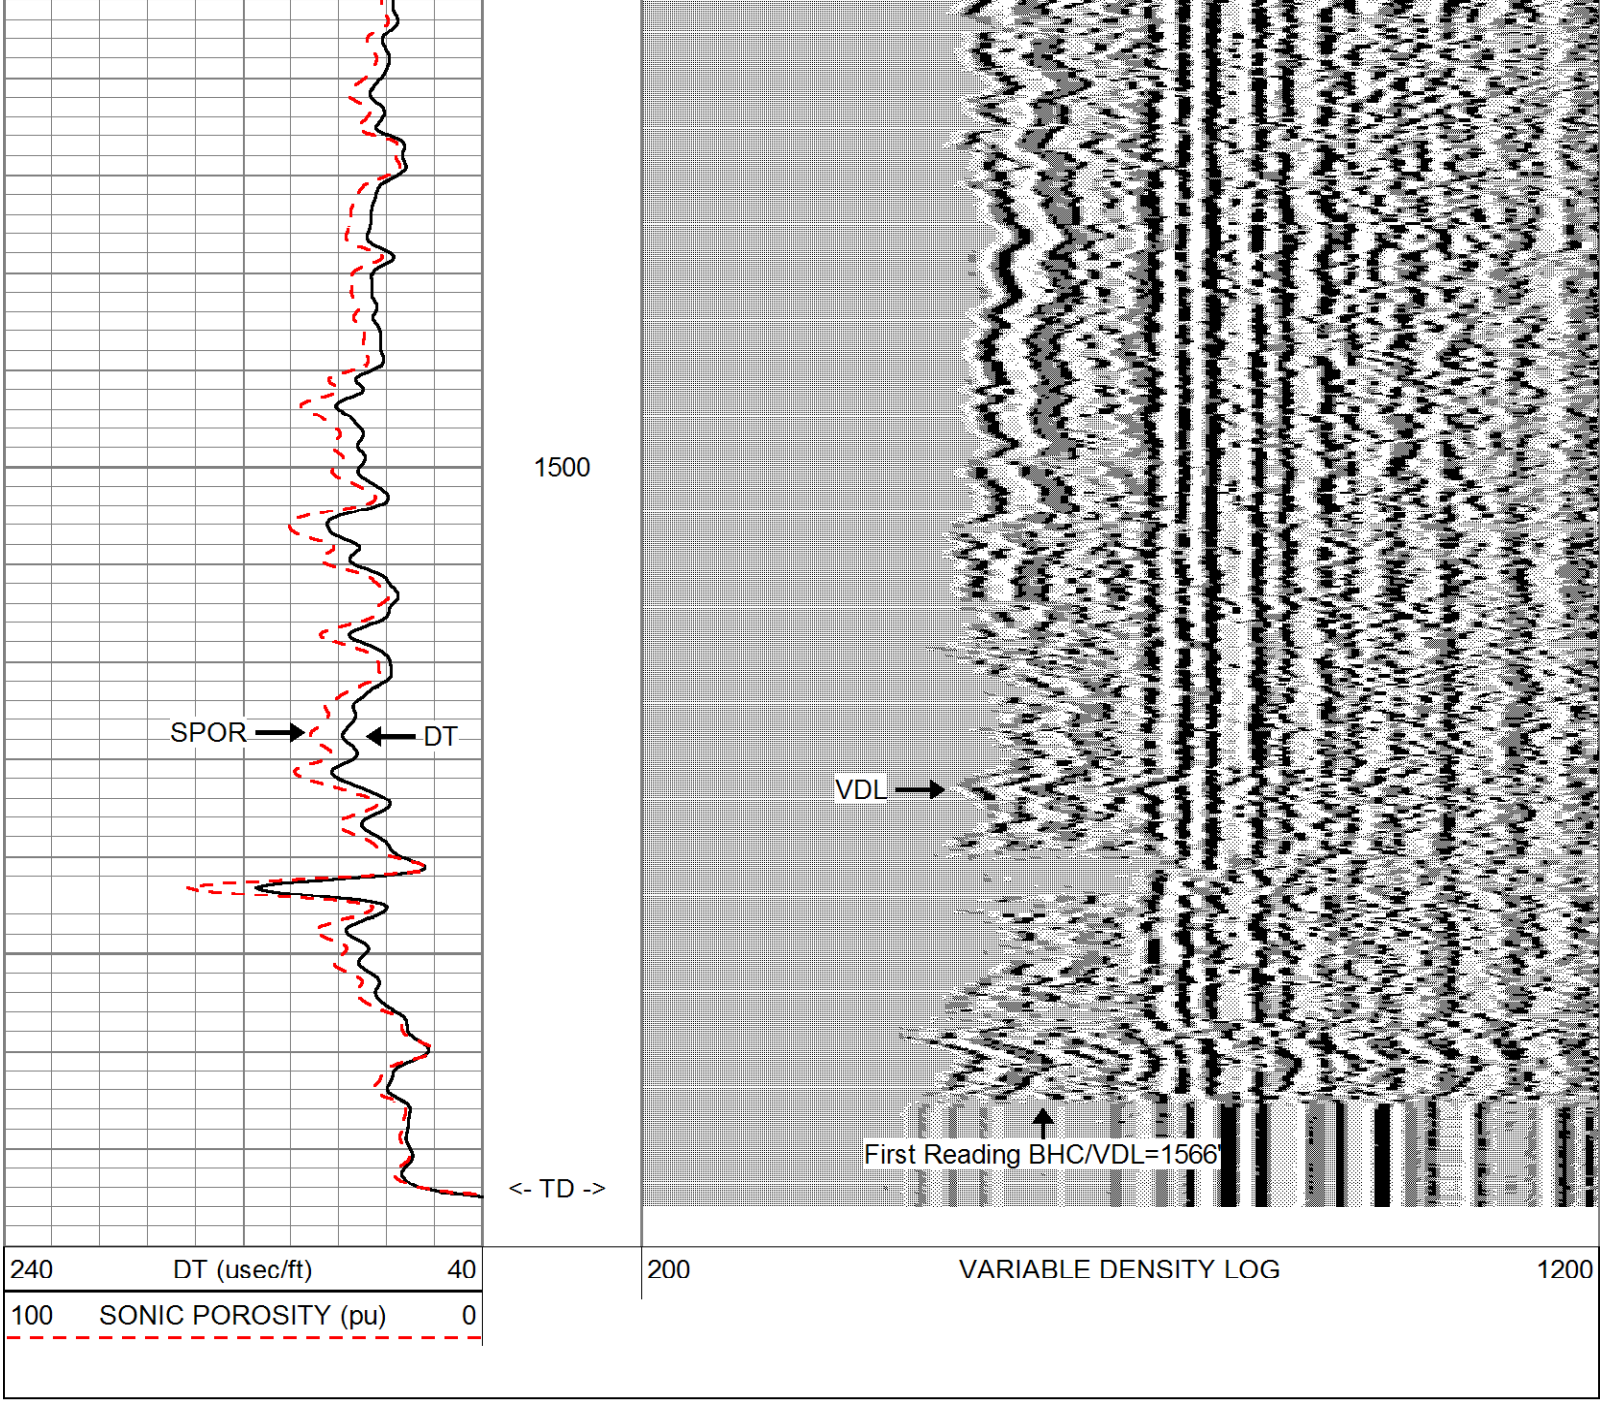

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
						

WVF1	8.50
WVF3	8.50
TT1	7.50
TT2	7.50
TT3	7.50
TT4	7.50
WVF2	6.50
WVF4	6.50

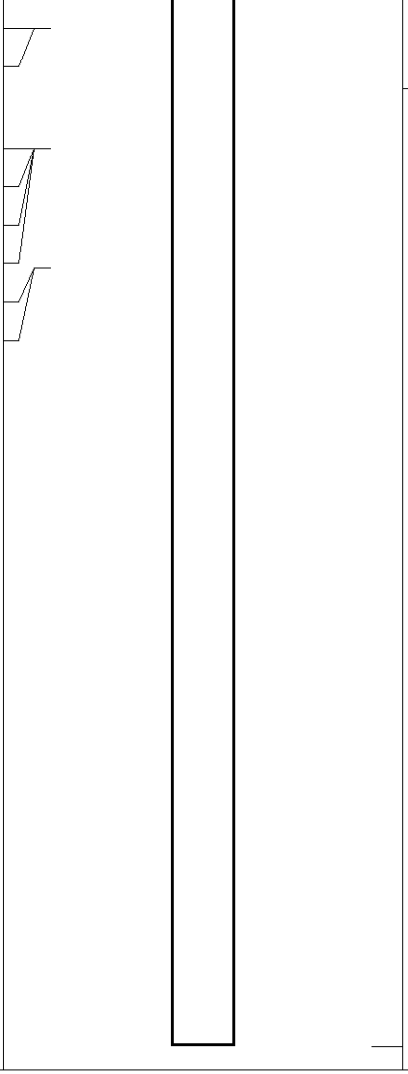

SLT-GO (245)	16.00	3.50	127.00

Dataset: fddavie2.db: field/well/run3/pass30
Total Length: 16.00 ft
Total Weight: 127.00 lb
O.D. 3.50 in

MV Geophysical

Company	Florida Design Drilling Corp.		
Well	PW-2		
Field	Davie		
County	Broward		
State	Florida	Country	USA