All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Rm=4.677 ohm-m @ 92.3 degF
Rmf=3.997 ohm-m @ 92.5 degF
Rmc=6.236 ohm-m @ 92.5 degF

Contract No.: CN050199

MAIN PASS

Database File: awe3zone.db
Dataset Pathname: MAIN
Presentation Format: DIL1200
Dataset Creation: Thu Aug 11 21:23:13 2005
Charted by: Depth in Feet scaled 1:1200



MAIN PASS

Database File: awe3zone.db
Dataset Pathname: MAIN
Presentation Format: DIL200
Dataset Creation: Thu Aug 11 21:23:13 2005
Charted by: Depth in Feet scaled 1:600

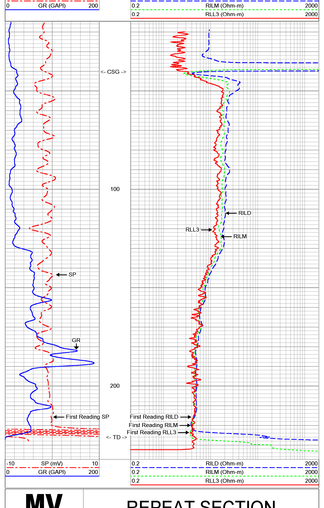

MAIN PASS

Database File: awe3zone.db
Dataset Pathname: MAIN
Presentation Format: DIL200
Dataset Creation: Thu Aug 11 21:23:13 2005
Charted by: Depth in Feet scaled 1:240

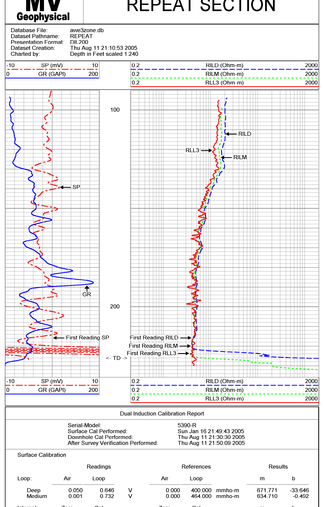

REPEAT SECTION

Database File: awe3zone.db
Dataset Pathname: REPEAT
Presentation Format: DIL200
Dataset Creation: Thu Aug 11 21:10:53 2005
Charted by: Depth in Feet scaled 1:240

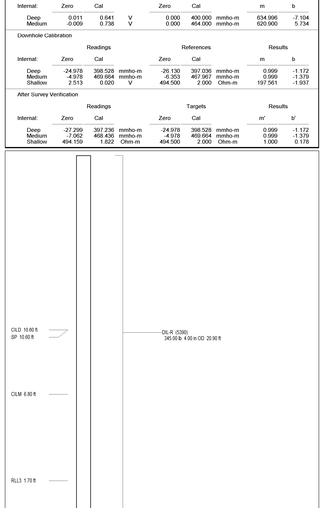

Dual Induction Calibration Report

Serial-Model: 5390-R
Surface Cal Performed: Sun Jan 16 21:40:43 2005
Downhole Cal Performed: Thu Aug 11 21:30:39 2005
After Survey Verification Performed: Thu Aug 11 21:50:09 2005

Surface Calibration

Loop:	Readings Air	Readings Loop		References Air	References Loop		Results m	Results b
Deep	0.050	0.646	V	0.000	400.000	mmho-m	671.771	-33.646
Medium	0.001	0.732	V	0.000	464.000	mmho-m	634.710	-0.402
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.641	V	0.000	400.000	mmho-m	634.996	-7.104
Medium	-0.009	0.738	V	0.000	464.000	mmho-m	620.900	5.734

Downhole Calibration

Internal:	Readings Zero	Readings Cal		References Zero	References Cal		Results m	Results b
Deep	-24.978	398.526	mmho-m	-26.130	397.036	mmho-m	0.999	-1.172
Medium	-4.978	459.664	mmho-m	-5.353	467.967	mmho-m	0.999	-1.379
Shallow	2.513	0.020	V	494.500	2.000	Ohm-m	197.561	-1.937

After Survey Verification

Internal:	Readings Zero	Readings Cal		Targets Zero	Targets Cal		Results m'	Results b'
Deep	-27.299	397.236	mmho-m	-24.978	398.526	mmho-m	0.999	-1.172
Medium	-7.082	456.436	mmho-m	-4.978	459.664	mmho-m	0.999	-1.379
Shallow	494.159	1.822	Ohm-m	494.500	2.000	Ohm-m	1.000	0.178

Dataset: run1pass5
Total Length: 20.90 ft
Total Weight: 345.00 lb
O.D. 4.00 in